

12/2014

Mod: FET/375


Production code: LCT 375



Diamond
catering equipment


FET/375

400V 3N 50Hz 6,0KW 16A

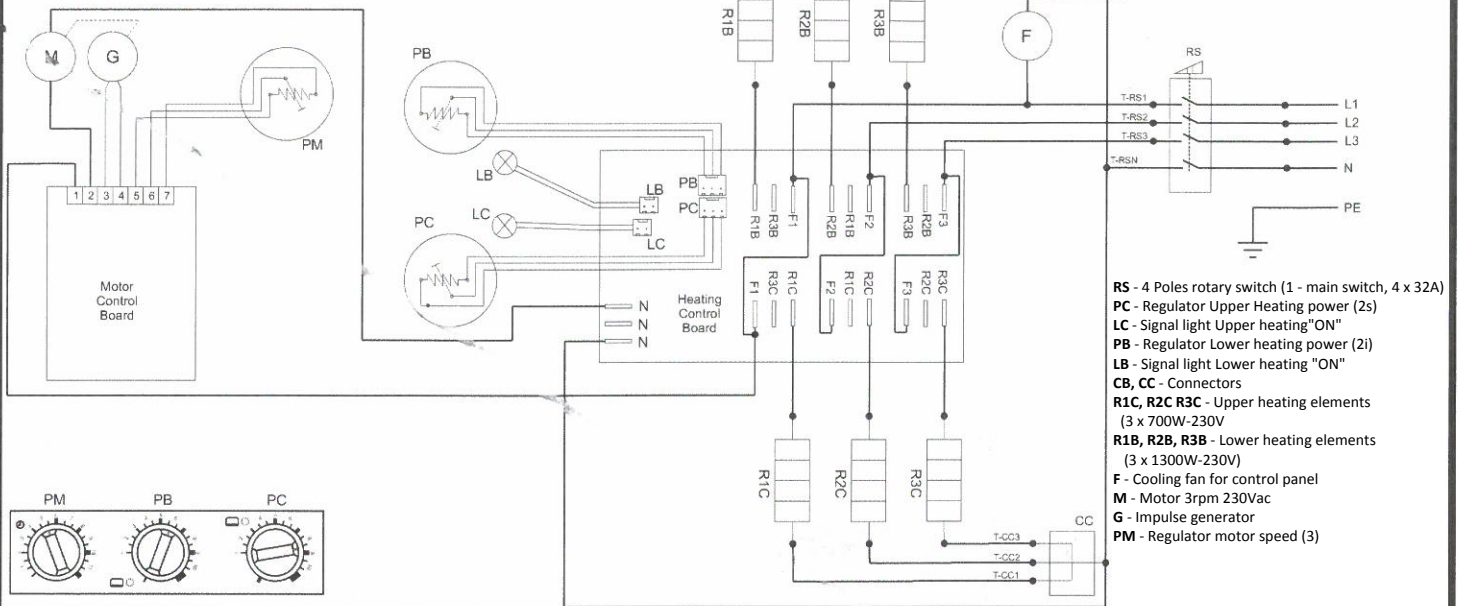

FET/375

Adaptation to 230V 3 50Hz 6,0KW 16A

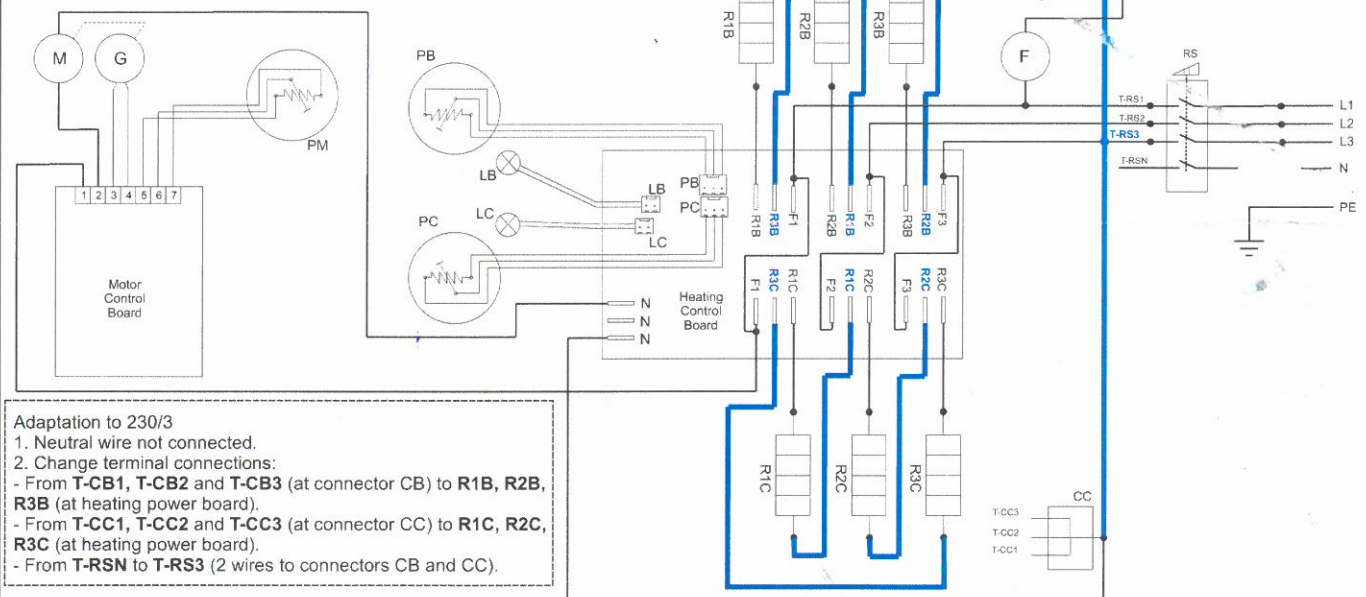

Adaptation to 230/3


1. Neutral wire not connected.

2. Change terminal connections:

- From T-CB1, T-CB2 and T-CB3 (at connector CB) to R1B, R2B, R3B (at heating power board).
- From T-CC1, T-CC2 and T-CC3 (at connector CC) to R1C, R2C, R3C (at heating power board).
- From T-RSN to T-RS3 (2 wires to connectors CB and CC).

FET/375

Adaptation to 230V 1N 50Hz 6,0KW 26,1A
or 240V 1N 50Hz 6,5KW 27,2A

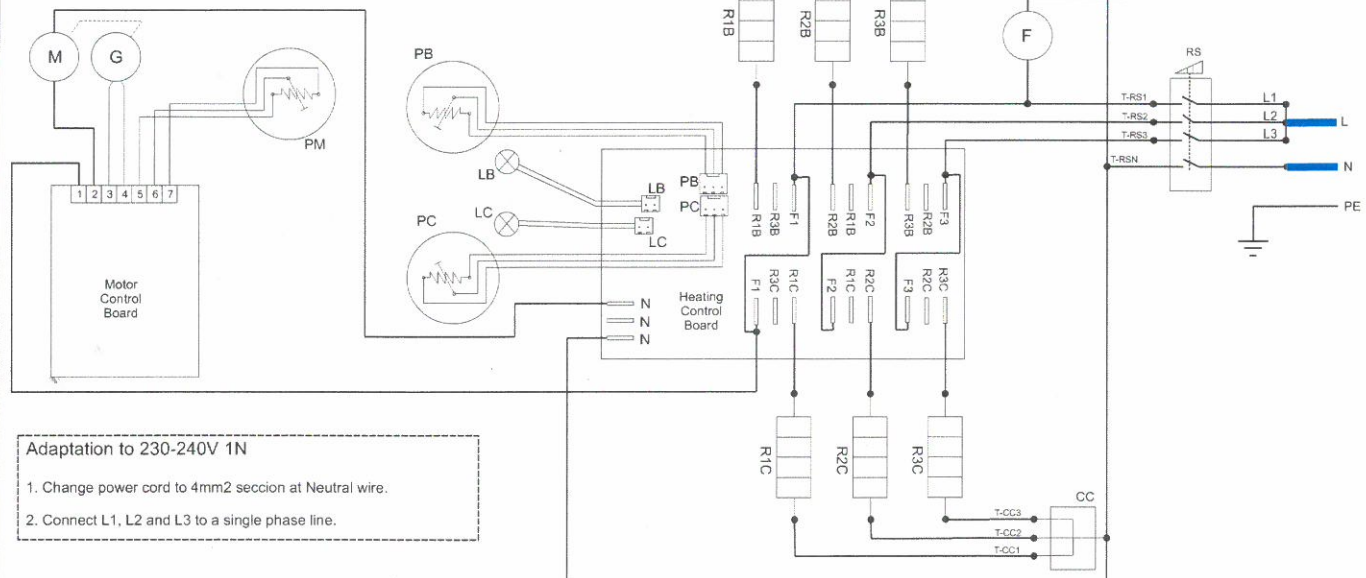

Adaptation to 230-240V 1N

1. Change power cord to 4mm² section at Neutral wire.
2. Connect L1, L2 and L3 to a single phase line.