



MOD : DPA/TRV15-R2

Production code : 8046452HC


06/2024

Refrigerated and ventilated top

- ▶ Stainless steel top AISI 304, th. 12/10
- ▶ Refrigerated laminar airflow
- ▶ Stainless steel blind bottoms (height 30 mm)
- ▶ Evaporator with anti-corrosion coating, which can be lifted to easily clean the well
- ▶ Condensed water drain on bottom (evaporation kit on request)
- ▶ Insulation by high density expanded polyurethane without C.F.C. and H.C.F.C.
- ▶ With condensing unit. Defrost is performed through stop of the compressor
- ▶ Digital contrai system for temperature adjustment and defrosting
- ▶ Capillary expansion

OPTIONAL

- ▶ Reverse cycle defrosting
- ▶ Kit for condensed water evaporation
- ▶ Remote version (pre-set for R452A gas)

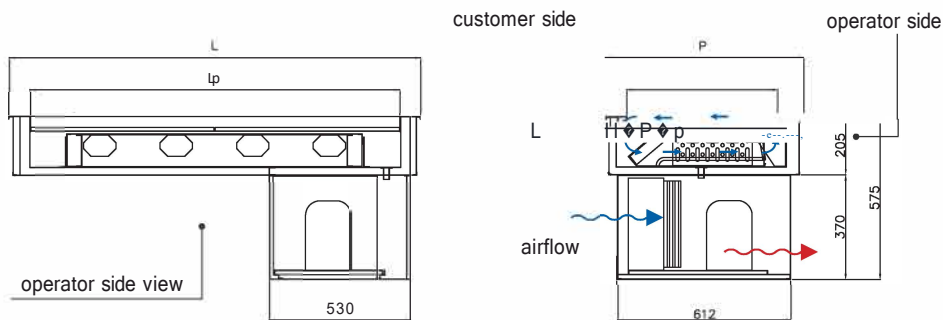

	2 GN1/1	3 GN1/1	4 GN1/1	5 GN1/1
Code	8046450HC	8046451HC	8046452HC	8046453HC
External dimensions [mm] LxP	800x700	1125x700	1455x700	1780x700
Top dimensions [mm] LpxPpxHp	650x510x30	980x510x30	1310x510x30	1635x510x30
Capacity GN 1/1 containers	2 GN1/1	3 GN1/1	4 GN1/1	5 GN1/1
Top temperature [°C]	-1/+5*	-1/+5*	-1/+5*	-1/+5*
Refrigerant gas	R290	R290	R290	R290
Cooling power at -10°C [W]	480	910	1285	1490
Total power [Kw]	0,33	0,6	0,8	0,9
Supply voltage (50Hz)	230V 1F+N	230V 1F+N	230V 1F+N	230V 1F+N

* Classification 2M1 according ta UNI EN ISO 23953-1:2006, UNI EN ISO 23953-2:2006