

02/2016

Mod: AC101

Production code: 922112



Diamond
catering equipment

INSTALLATION DIAGRAM - INSTALLATIONS DIAGRAMM - SCHEMAS CONCERNANT L'INSTALLATION - SCHEMA DI INSTALLAZIONE - ESQUEMA PARA LA INSTALACION

HEATED CUPBOARD SUPPORT GEHEIZTER UNTERSCHRANK SUPPORT AVEC ARMOIRE CHAUFFANTE BASE ARMADIO RISCALDATO SOPORTE CON ARMARIO CALENTADO

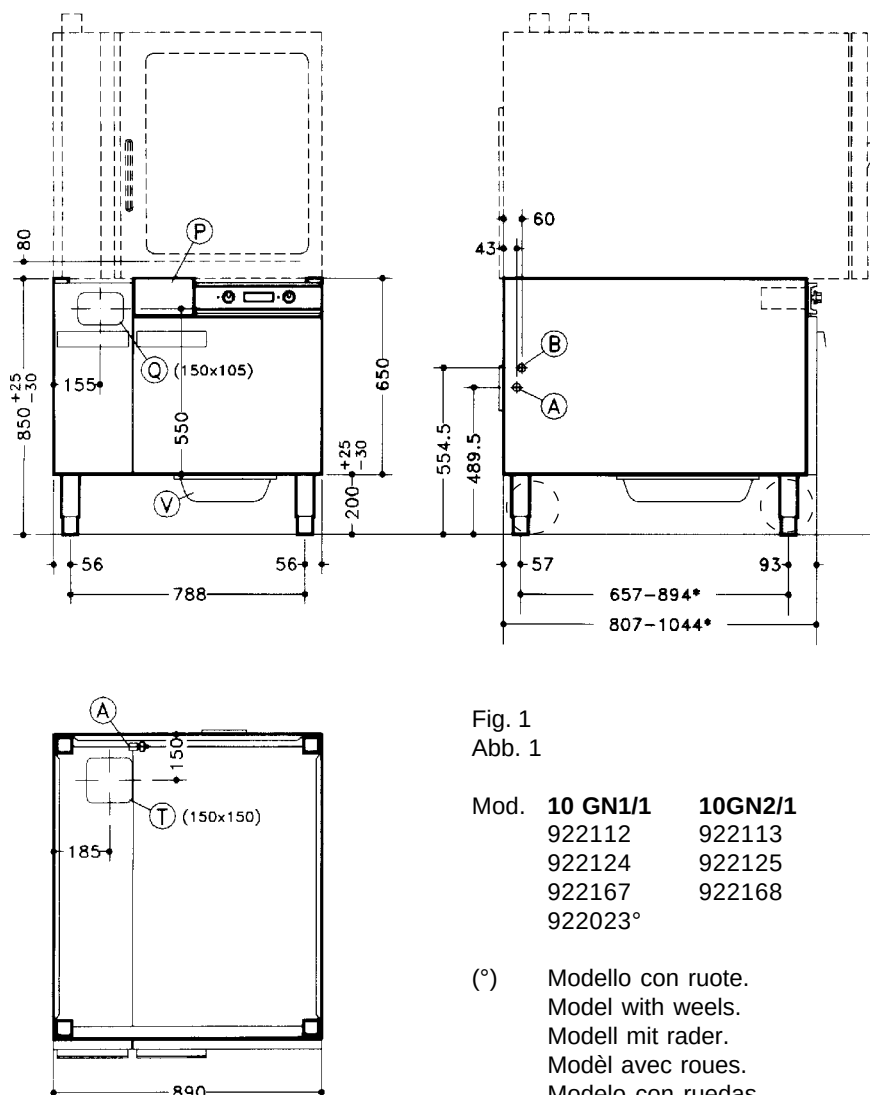


Fig. 1
Abb. 1

Mod.	10 GN1/1	10GN2/1
	922112	922113
	922124	922125
	922167	922168
	922023°	

(°) Modello con ruote.
Model with wheels.
Modell mit rader.
Modèl avec roues.
Modelo con ruedas.

GB - IE

A - Water supply connection (0,5 " 5 °F)	Ø3/4"M	ISO 7/1
B - Power supply cable inlet		
Q - Connections access	150x105	
T - Connections access	150x150	
V - Dripping tray		

IT

A - Attacco alim. acqua (0,5 " 5 °F)	Ø3/4"M	ISO 7/1
B - Entrata cavo elettrico		
Q - Area di accesso connessioni	150x105	
T - Area di accesso connessioni	150x150	
V - Vaschetta raccogli condense		

DE - AT

A - Wasseranschluß(0,5 " 5 °fH)	Ø3/4"M	ISO 7/1
B - Netzkabeleingang		
Q - Zugang zu den Ausnschlüssen	150x105	
T - Zugang zu den Ausnschlüssen	150x150	
V - WrasensammelschaleAuffangschale für Kondenswasser		

ES

A - Conexión de agua (0,5 " 5 °F)	Ø3/4"M	ISO 7/1
B - Ingreso cable eléctrico		
Q - Zona de acceso conexiones	150x105	
T - Zona de acceso conexiones	150x150	
V - Cubeta colectora del agua de condensación		

FR - BE

A - Raccord eau (0,5 " 5 °F)	Ø3/4"M	ISO 7/1
B - Entrée câble électrique		
Q - Accès connexions	150x105	
T - Accès connexions	150x150	
V - Récipient eau de condensation		