



MOD : CVX/8M

Production code : BERVDI8000PRO1F-C

09/2024





Air density (γ): 1.20 kg/m³

Installation type "A": free inlet, free outlet

12000 m³/h fan test chamber according to AMCA 210/05 fig. 12


Free field Lp(A) measurements at 1 m according to ISO 3746:2011

Fan type: BERVDI 8000 PRO(CL:1396)
Test nr.: 2709 - 2712
Date: 2018/01/16
Power supply[V]: 230 1~
Frequency [Hz]: 50

Motor code: 2011024
Motor power [W]: 1000
Motor poles: 4
Mot. prot. class: IP55
Mot. ins. class: F

Motor T.H.: YES IN
Capacitor [μ F]: 30
Fan max. abs. current [A]: 5.5

ErP status: Not subjected to ErP Regulation

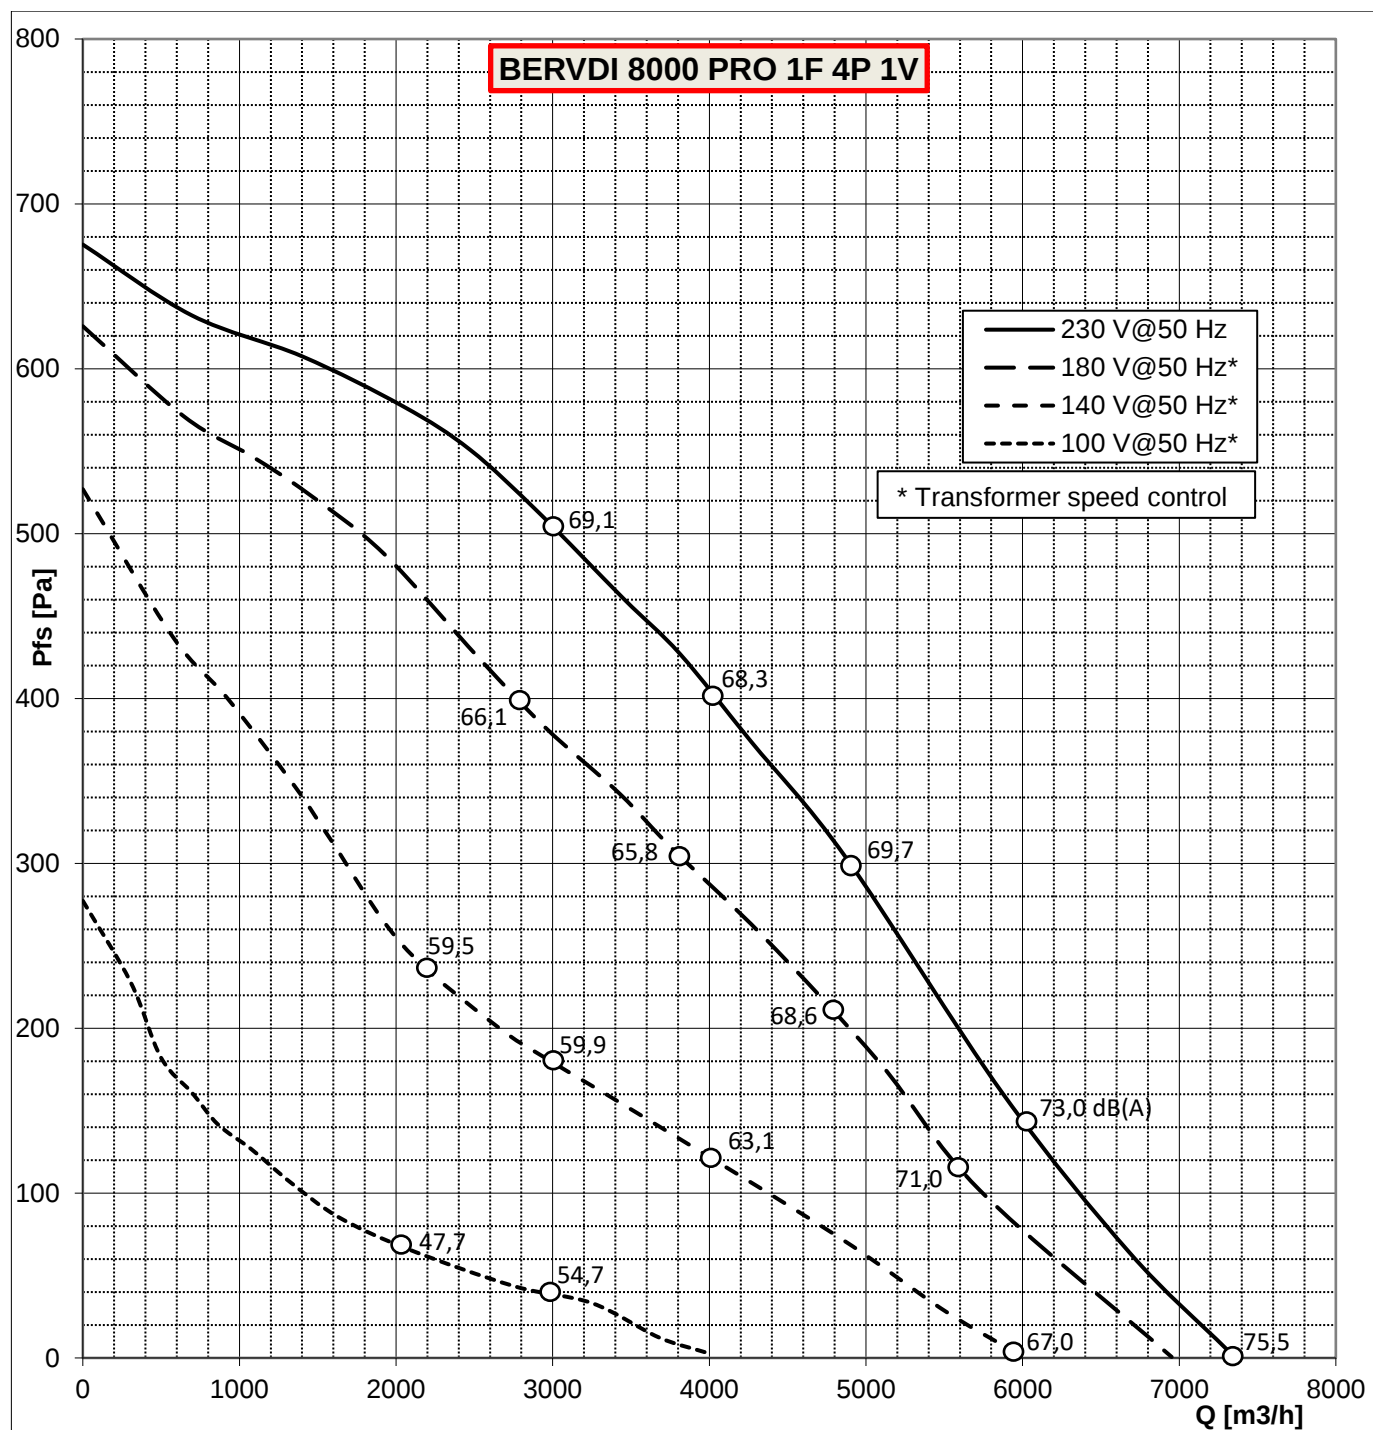



Air density (γ): 1.20 kg/m³

Installation type "A": free inlet, free outlet

12000 m³/h fan test chamber according to AMCA 210/05 fig. 12



Free field Lp(A) measurements at 1 m according to ISO 3746:2011

Fan type: BERVDI 8000 PRO(CL:1396)
Test nr.: 2709 - 2712
Date: 2018/01/16
Power supply[V]: 230 1~
Frequency [Hz]: 50

Motor code: 2011024
Motor power [W]: 1000
Motor poles: 4
Mot. prot. class: IP55
Mot. ins. class: F

Motor T.H.: YES IN
Capacitor [μ F]: 30
Fan max. abs. current [A]: 5.5

ErP status: Not subjected to ErP Regulation

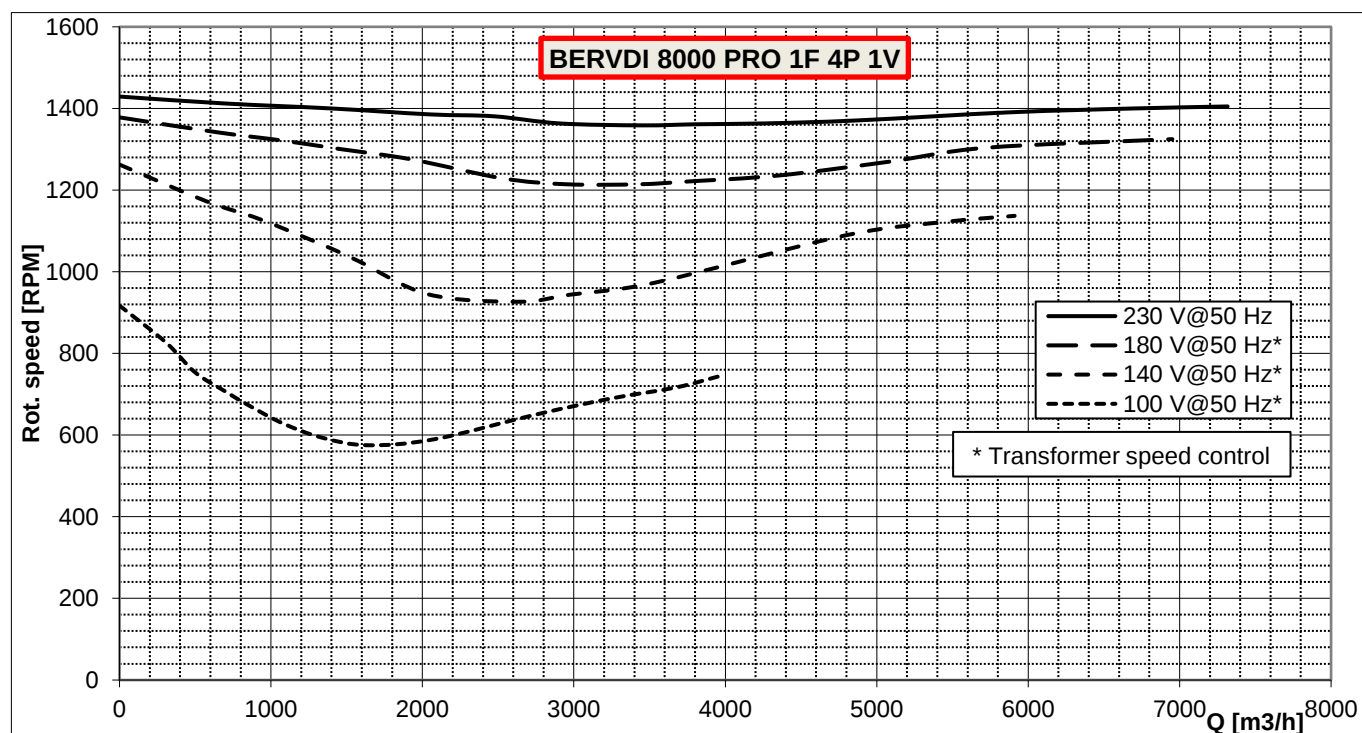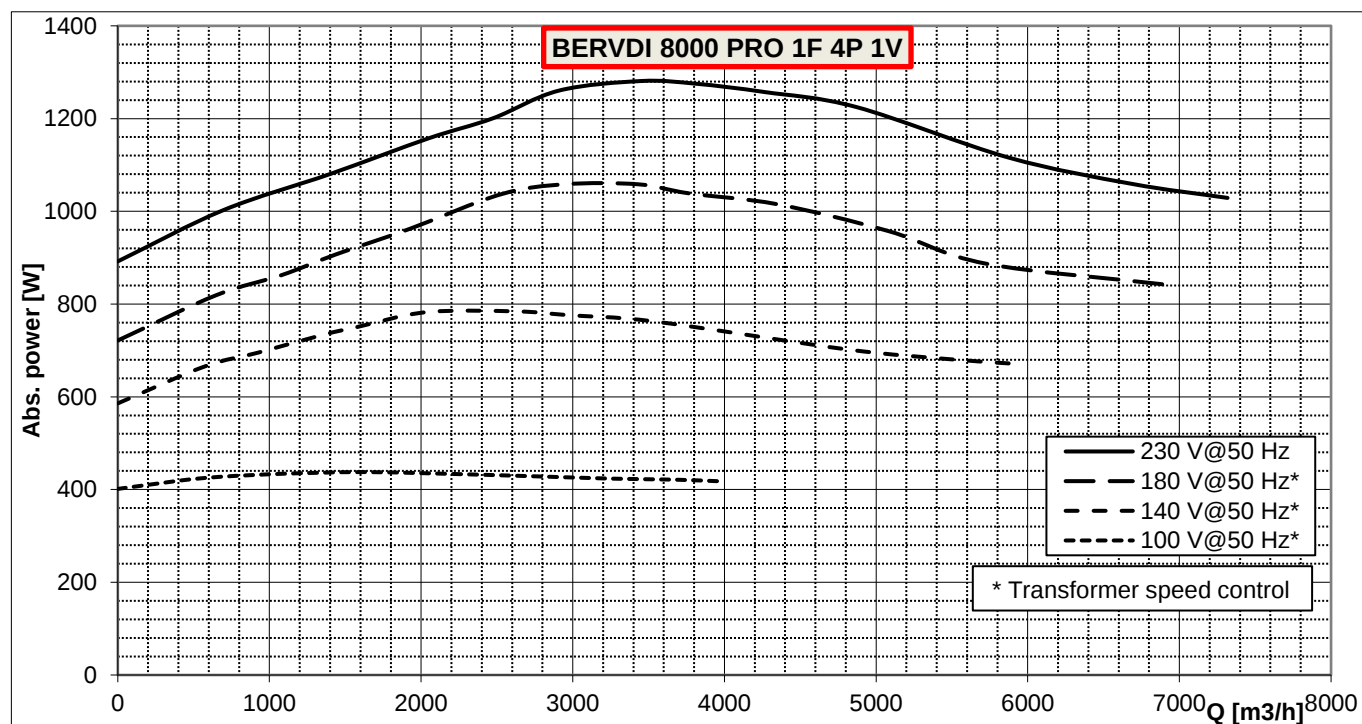



Air density (γ): 1.20 kg/m³

Installation type "A": free inlet, free outlet

12000 m³/h fan test chamber according to AMCA 210/05 fig. 12

Free field Lp(A) measurements at 1 m according to ISO 3746:2011

Fan type: BERVDI 8000 PRO(CL:1396)

Test nr.: 2709 - 2712

Date: 2018/01/16

Power supply[V]: 230 1~

Frequency [Hz]: 50

Motor code: 2011024

Motor power [W]: 1000

Motor poles: 4

Mot. prot. class: IP55



Mot. ins. class: F

Motor T.H.: YES IN

Capacitor [μ F]: 30

Fan max. abs. current [A]: 5.5

ErP status: Not subjected to ErP Regulation

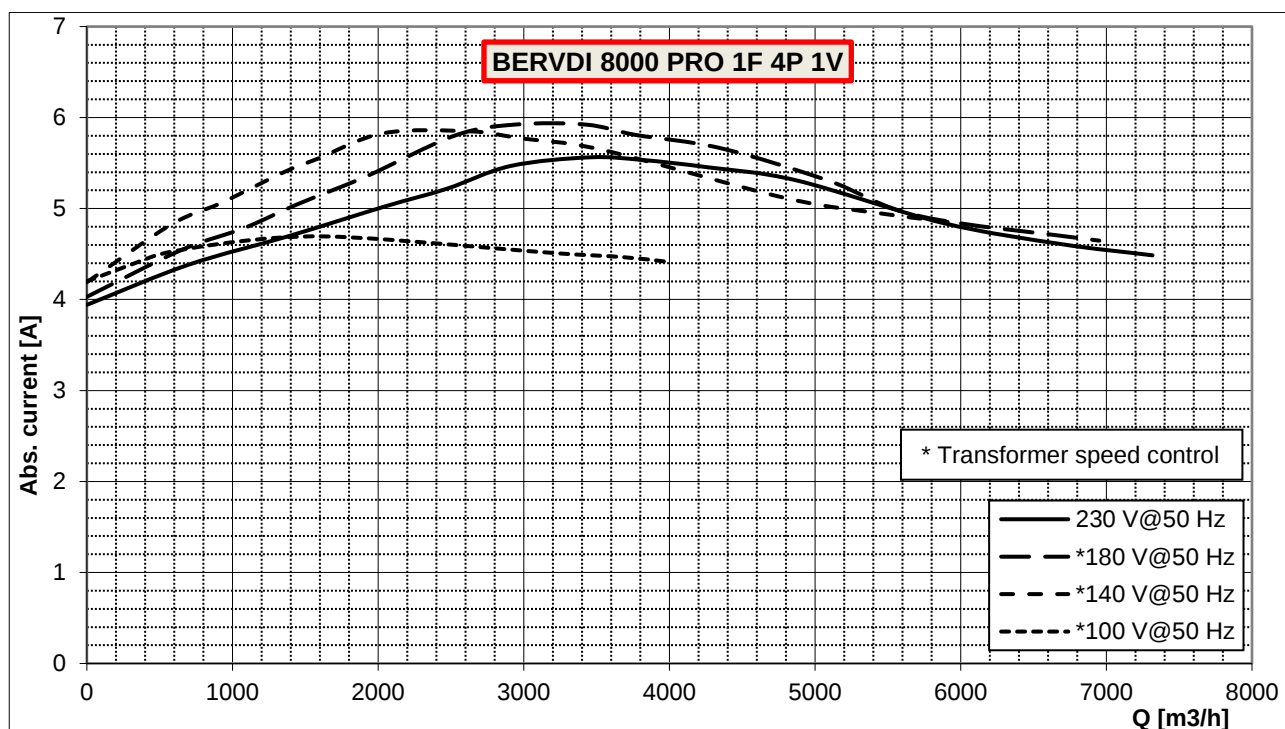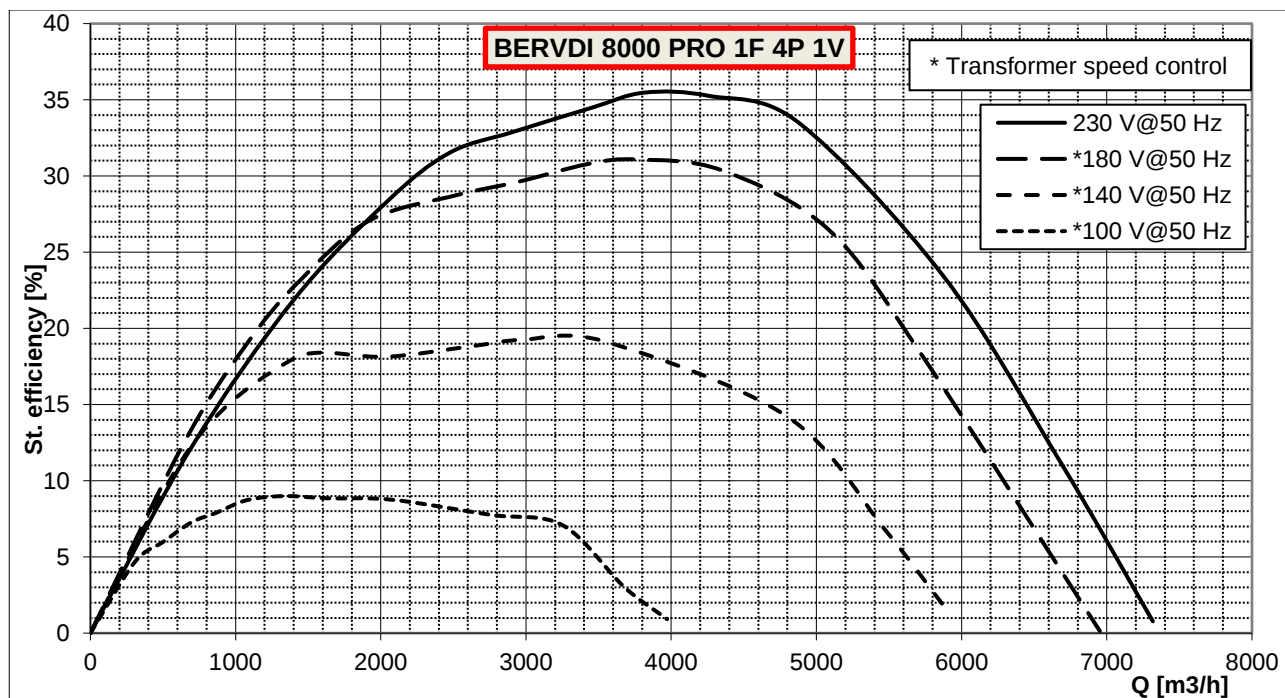



Air density (γ): 1.20 kg/m³

Installation type "A": free inlet, free outlet

12000 m³/h fan test chamber according to AMCA 210/05 fig. 12

Free field Lp(A) measurements at 1 m according to ISO 3746:2011


Fan type: BERVDI 8000 PRO(CL:1396)
Test nr.: 2709 - 2712
Date: 2018/01/16
Power supply[V]: 230 1~
Frequency [Hz]: 50

Motor code: 2011024
Motor power [W]: 1000
Motor poles: 4
Mot. prot. class: IP55
Mot. ins. class: F

Motor T.H.: YES IN
Capacitor [μ F]: 30
Fan max. abs. current [A]: 5.5

ErP status: Not subjected to ErP Regulation

Setup for unit noise test

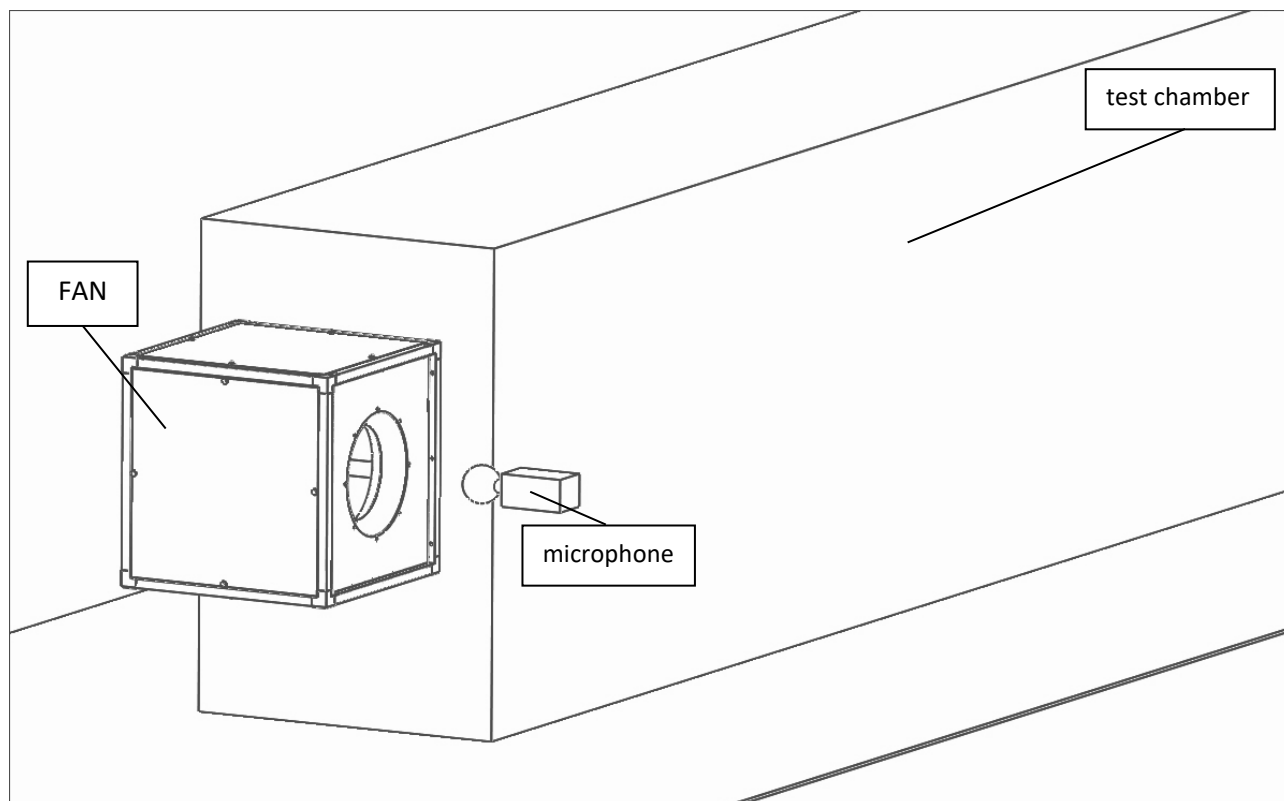

Noise test setup is according to ISO 3746:2011 Standard.

A microphone, placed at 1 meter from the air inlet and 1 meter from the ground, gets the sound pressure levels in different unit operating conditions.

Test data are then mathematically revised in order to get the A-weighted free-field total sound pressure levels Lp(A) of the unit.

The Lp(A) value in dB(A) is available on CMC documentation.

Add 11 dB(A) to the sound pressure level Lp(A) value to get the correspondent sound power level Lw(A).

