



		Model	D117-E/7D	
		Code Production	T101BEDN	
		Interface :		
				
	Overall Dimension (Width-Depth-Height) *open		mm	1.150 x 770 x 1.615(2088*)
	Packaging Dimension (WxDxH)		mm	1.280x920x1800
	Gross weight		Kg	240
	Net weight		Kg	200
	Volume		mc	2,3
	Rack size		mm	500x500
	Useable wash chamber height		mm	450
	Tank wash construction			deep drawn
	Tank pre-wash construction			-
	General construction			double skin
	Door Construction			double skin and insulated
	Wash Tank volume		liter	70
	Wash Tank heating element		W	10.500
	Wash Tank surface strainers			stainless steel
	Pre-Wash Tank volume		liter	-
	Pre-Wash Tank heating element		W	-
	Pre-Wash Tank surface strainers			-
	Wash pump type			double flow
	Wash pump power		W	1.500
	Wash pump delivery		Lt/min	720
	Wash temperature		°C	60
	Pre-Wash pump type			-
	Pre-Wash pump power		W	-
	Pre-Wash temperature		°C	-
	Boiler volume		liter	17
	Boiler heating element (with 50°C inlet water) standard		W	9.500
	Boiler heating element (with 10°C inlet water)		W	16.000
	Boiler heating element (with 10°C inlet water + DCM-R/7)		W	12.000
	Back-flow system			valve
	Rinse type			single rinse
	Pre-Rinse			-
	Rinse temperature		°C	82
	Rinse water consumption		Liter /hour	160
	Inlet water temperature		°C	Cold:10-40°C Hot:45-60°C
	Optimal external water pressure		bar	from 2 to 4
	Drain system			overflow





	Drain size	G	1' ½"
	Productivity – speed 1	Racks per hour	120
	Productivity – speed 2	r/h	60
			-
			-
	Noise level	db	< 70
	Conveyor power	W	500
	Electric Connection	V - ph - Hz	400V 3+N 50Hz
	Max Electric Power with 50°C standard	W	22.000
	Max Electric Power with 10°C	W	28.500
	Max Electric Power with 10°C +DCM-R/7	W	24.700
	Plates racks	Nr	YES(x2)
	Flat Rack	Nr	YES
	Cutterly Rack	Nr	YES
	Electric cable		not included
	Drain hose		YES
	Fill hose		YES

Rinse aid and detergent dispenser (DDL-Y)	Optional
Increase power for cold feed 10°C (DRC-W/7)	Optional
Drying tunnel (DSM-A/7)	Optional
Drying tunnel on 90° curve (DSM90-7)	Optional
Heat recovery system (DCM-R/7)	Optional
Suction system (DMA-E/7)	Optional
Pressure reducer with manometer	Standard built in
Emergency switch (SCP-7)	Optional
End limit switch	Standard built in

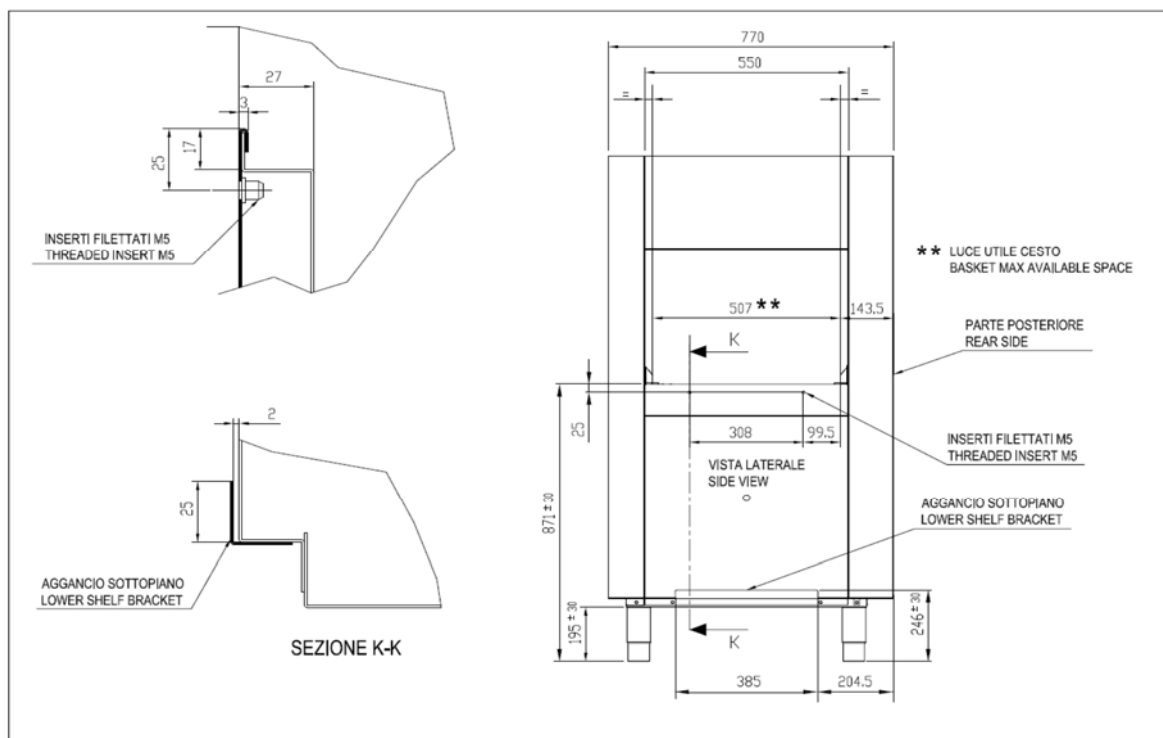

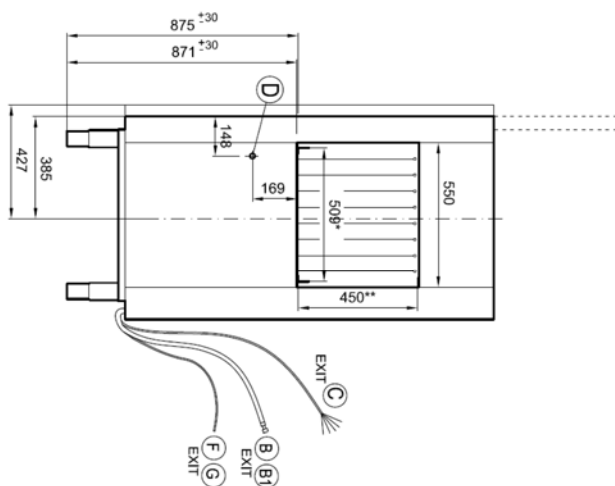

* USEFUL WIDTH FOR BASKET
** USEFUL HEIGHT FOR BASKET

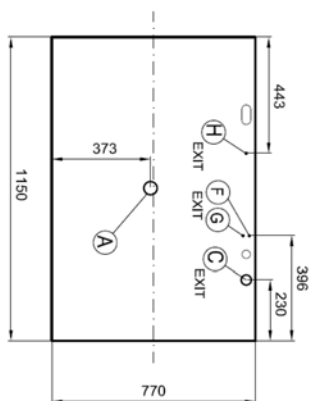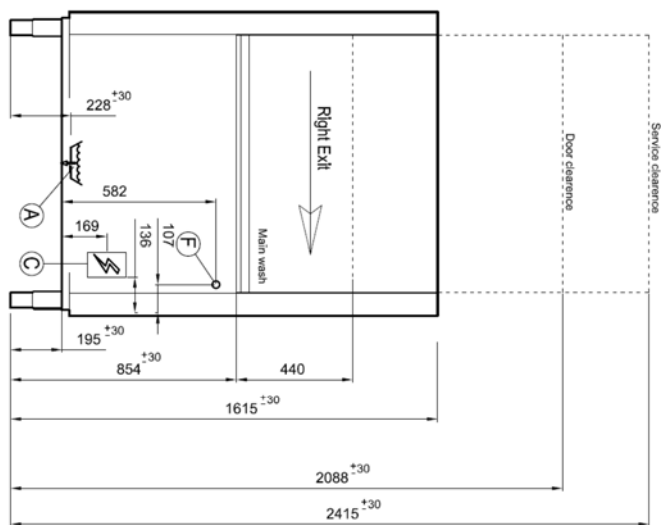

A		Ø 1"1/2 M	D		Ø PG11	Enc. switch
A1		Ø 31 M	E		Ø 250	Steam exhaust
B		G 3/4" M	F		Ø 14 M	Detergent Inlet
B1		G 3/4" M	G		Ø 7 M	Rinse aid Inlet
C		PG36 Power supply	H		Ø 6	Equipotential
		L		Ø 250	Dryer suction	

Installation layout

Rack Type

T101D

00



Designed by: M. PUCCI

Date: 15.05.2015

Determination:

Code:

Rev.: