


10/2019

Mod: D26/6B-AC

Production code: GH50PTSBE C

		Model	D26/6B -AC		
		Code Production	GH50PTSBECE		
		Interface :			
	Overall Dimension (Width-Depth-Height) *open			mm	724x818x1529(2010*)
	Packaging Dimension (WxDxH)			mm	760x840x1520
	Gross weight			Kg	117
	Net weight			Kg	107
	Volume			mc	0,97
	Rack size			mm	500x500
	Max door /hood opening			mm	450
	Max glasses/plate Height			mm	425 / 440
	General construction			double skin	
	Door/hood Construction			double skin	
	Tank construction			deep drawn	
	Tank volume			liter	20
	Tank heating element			W	2.500
	Tank surface strainers			stainless steel	
	Wash pump type			double flow	
	Wash pump power			W	700
	Wash temperature			°C	55
	Boiler type			without pressure	
	Boiler volume			liter	11
	Back-flow system			break tank	
	Boiler heating element			W	8.000
	Rinse booster pump			yes	
	Rinse booster pump power			W	200
	Rinse temperature			°C	80
	Rinse water consumption			Liter /rack	2,6
	Optimal external water pressure			bar	1 - 4
	Drain system			overflow	
	Drain pump			KIT (DPS-LC/4-NP)	
	Rinse aid dispenser			YES	
	Detergent dispenser			KIT (DD-LC/1-NP)	
	Wash cycle			sec	60 - 110 - 150 - continuous
	Water softner			Continuous type	YES
	Electric Power			W	8.700
	Electric Connection			V - ph - Hz	400V 3+N 50Hz
	Fuse			A	16
	Plates racks			Nr	YES
	Flat Rack			Nr	YES
	Cutterly Rack			Nr	YES
	Electric cable			YES	
	Drain hose			YES	
	Fill hose			YES	

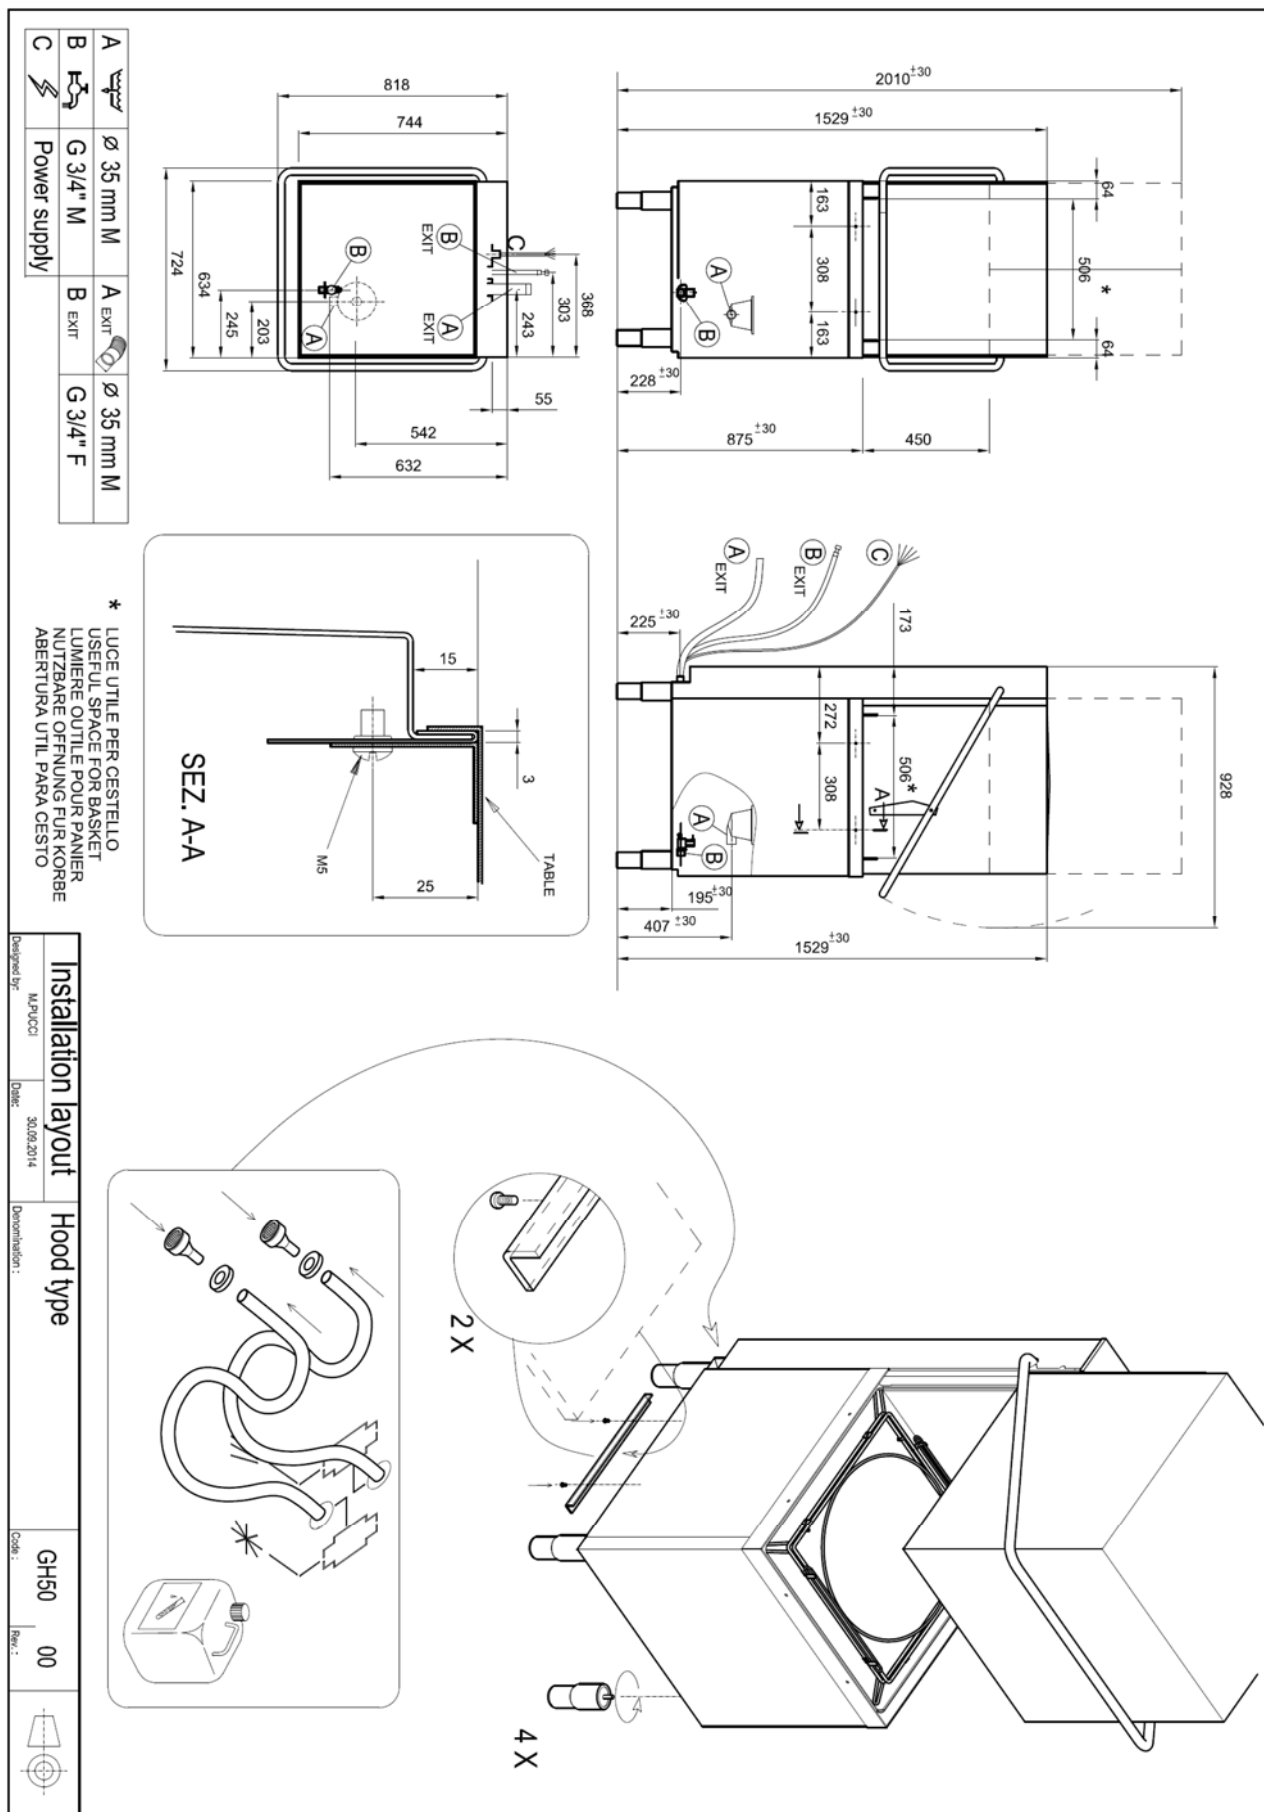

Installation layout

Hood type

GH50

00



Designed by:

M.P.UCCI

Date:

30/09/2014

Denomination:

Code:

Rev.: