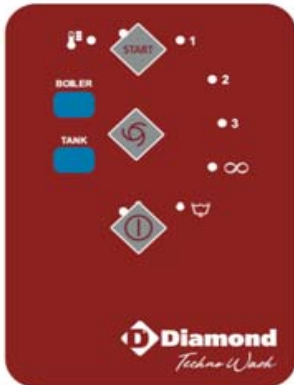


10/2022


Mod: DATIC37E/7


Production code: T202BET

	Model	DATIC37-E/7		
	Code Production	T202BET		
Interface :				
				
	Overall Dimension (Width-Depth-Height) *open	mm	2.519 x 770 x 1.615(2088*)	
	Packaging Dimension (WxDxH)	mm	3.300 x 920 x 1850	
	Gross weight	Kg	470	
	Net weight	Kg	420	
	Volume	mc	5,6	
	Rack size	mm	500x500	
	Useable wash chamber height	mm	450	
	Tank wash construction		deep drawn	
	Tank pre-wash construction		deep drawn	
	General construction		double skin	
	Door Construction		double skin and insulated	
	Wash Tank volume	liter	70	
	Wash Tank heating element	W	10500	
	Wash Tank surface strainers		stainless steel	
	Pre-Wash Tank volume	liter	70	
	Pre-Wash Tank heating element	W	-	
	Pre-Wash Tank surface strainers		stainless steel	
	Wash pump type		double flow	
	Wash pump power	W	2700	
	Wash pump delivery	Lt/min	1050	
	Wash temperature	°C	60	
	Pre-Wash pump type		double flow	
	Pre-Wash pump power	W	1500	
	Pre-Wash temperature	°C	45	
	Boiler volume	liter	17	
	Boiler heating element (with 50°C inlet water) standard	W	12500	
	Boiler heating element (with 10°C inlet water)	W	22000	
	Boiler heating element (with 10°C inlet water +DMC-R/7)	W	15000	
	Back-flow system		break tank	
	Rinse type		multiple rinse	
	Pre-Rinse pump	W	200	
	Pre-rinse pump delivery	Lt/min	110	
	Pre-Rinse tank	liter	5	
	Rinse temperature	°C	85	
	Rinse water consumption	Liter /hour	220	



	Inlet water temperature	°C	Cold:10-40°C Hot:45-60°C
	Optimal external water pressure	bar	from 2 to 4
	Drain system		overflow
	Drain size	G	1' 1/2"
	Productivity – speed 1	Racks per hour	270
	Productivity – speed 2	r/h	200
	Productivity – speed 3	r/h	140
			-
	Noise level	db	< 70
	Conveyor power	W	500
	Electric Connection	V - ph - Hz	400V 3+N 50Hz
	Max Electric Power with 50°C standard (+dry unit)*	W	28200 (34750)*
	Max Electric Power with 10°C (+dry unit)*	W	37700 (44250)*
	Max Electric Power with 10°C +DMC-R/7 (+dry unit)*	W	31100 (37650)*
	Plates racks	Nr	YES(x2)
	Flat Rack	Nr	YES
	Cutterly Rack	Nr	YES
	Electric cable		not included
	Drain hose		YES
	Fill hose		YES

Rinse aid and detergent dispenser	(DDL-Y)	Optional
Increase power for cold feed 10°C	(DRC-W/7)	Optional
Drying tunnel	(DSM-A/7)	Optional
Drying tunnel on 90° curve	(DSM90-7)	Optional
Heat recovery system	(DCM-R/7)	Optional
Suction system	(DMA-E/7)	Optional
Emergency switch	(SCP-7)	Optional
End limit switch		standard built in
Corner prewash	(DRL-P/7)	Optional

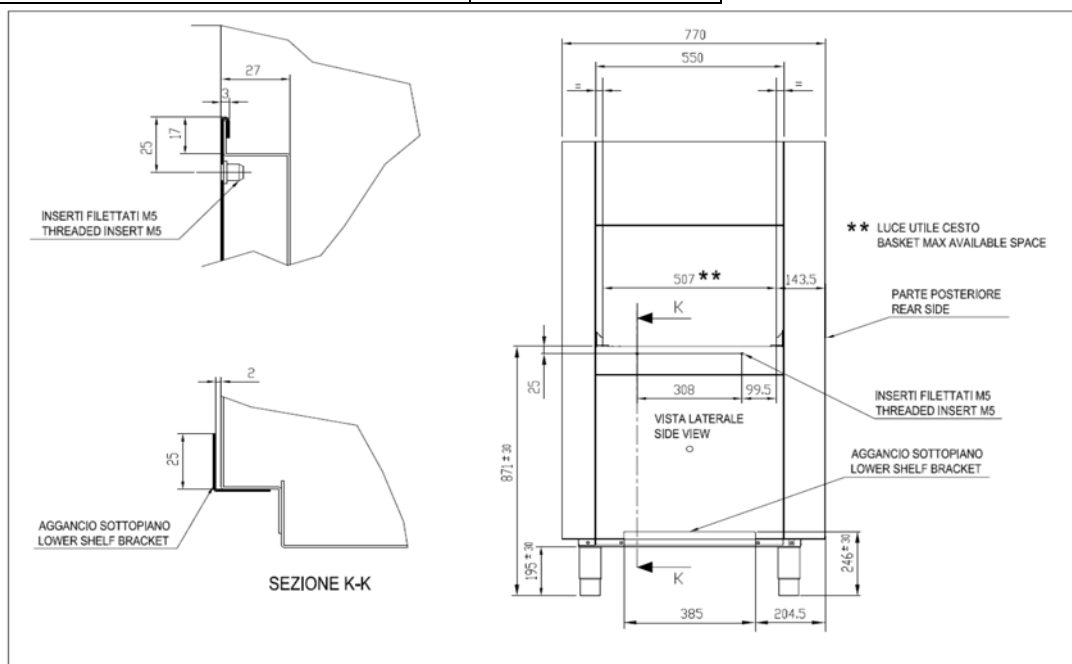

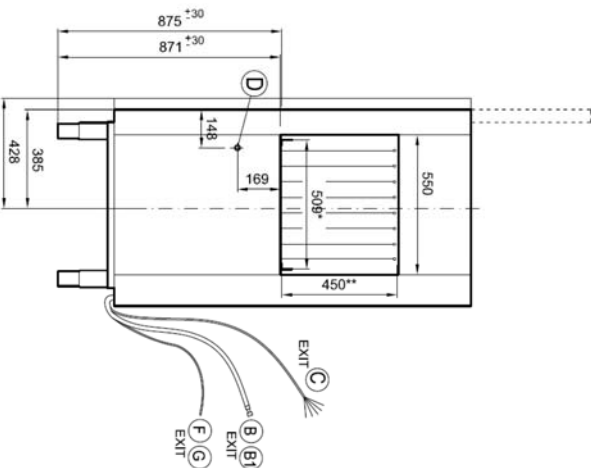


* USEFUL WIDTH FOR BASKET
** USEFUL HEIGHT FOR BASKET

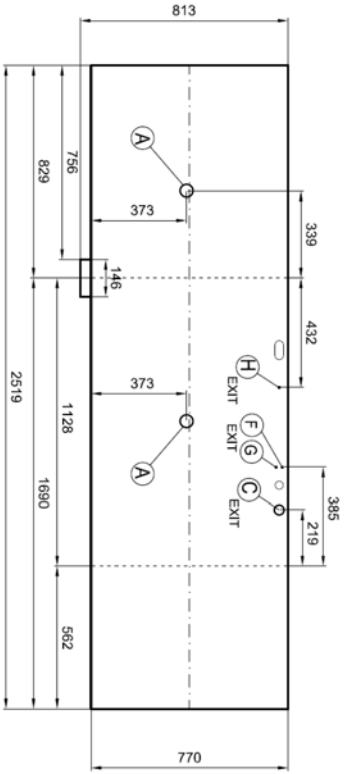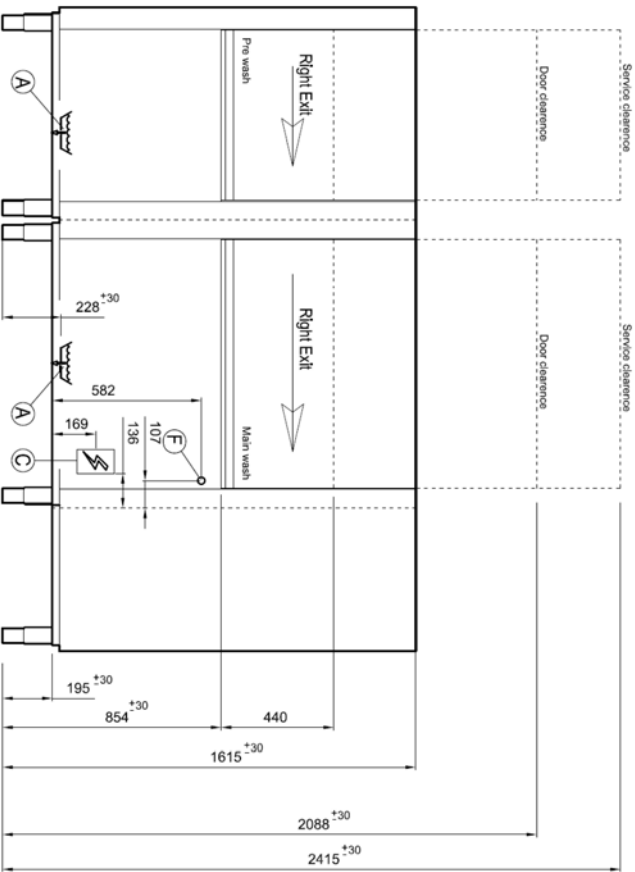



A		Ø 1"1/2 M	D		Ø PG11	Ente switch
A1		Ø 31 M	E		Ø 250	Steam exhaust
B		G 3/4" M	F		Ø 14 M	Detergent inlet
B1		G 3/4" M	G		Ø 7 M	Rinse ad inlet
C		PG36	H		Ø 6	Equipotential
			L		Ø 250	Dryer suction

Installation layout		Rack Type	
Designed by:	M.P.UCCI	Date:	15.05.2015
Determination:		Code:	T202D
		Rev.:	00



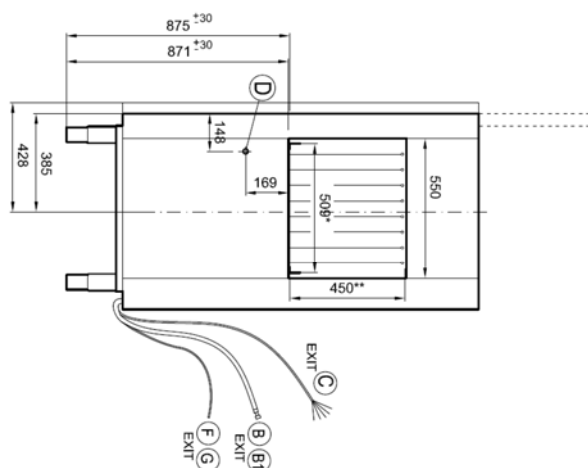

* USEFUL WIDTH FOR BASKET
** USEFUL HEIGHT FOR BASKET

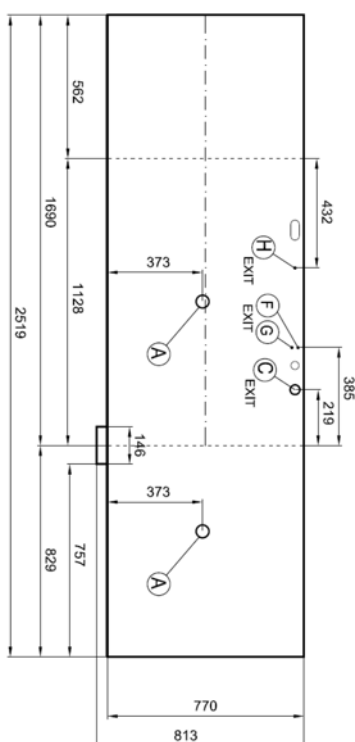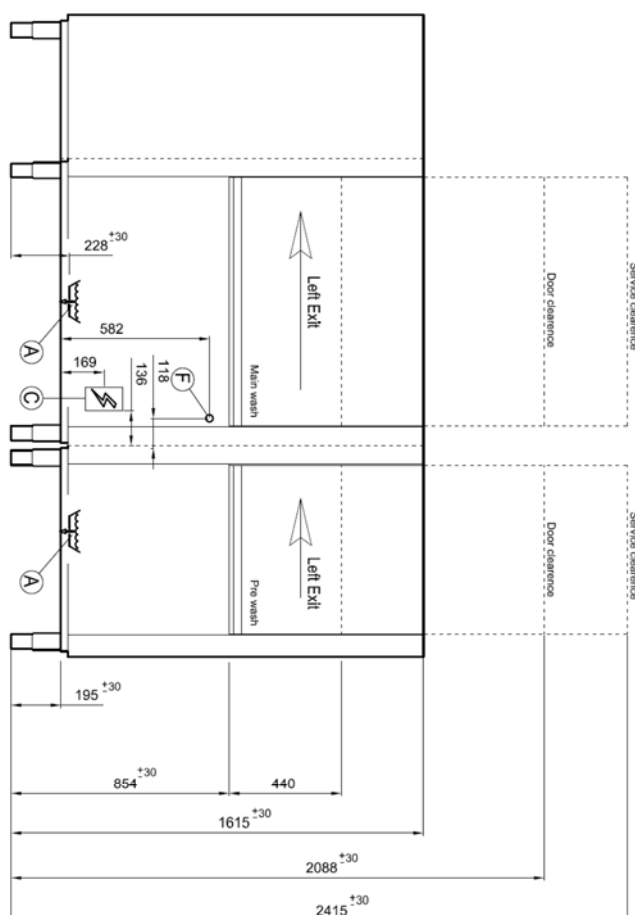

A		Ø 1"1/2 M	D		Ø PG11	End switch
A1		Ø 31 M	E		Ø 250	Steam exhaust
B		G 3/4" M	F		Ø 14 M	Detergent inlet
B1		G 3/4" M	G		Ø 7 M	Rinse aid inlet
C		PG36	H		Ø 6	Equipotential

L		Ø 250	Dryer suction
---	---	-------	---------------

Installation layout

Rack Type

T202S

00

Designed by: M. PUCCI

Date: 15.05.2015

Determination:

Code:

Rev.:

