

03/2011

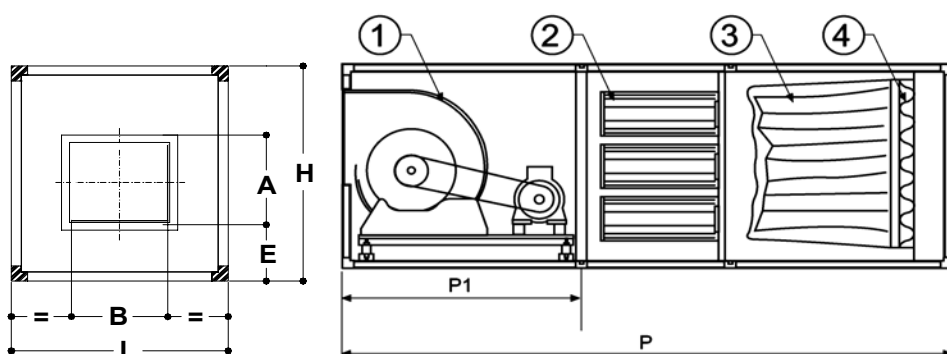
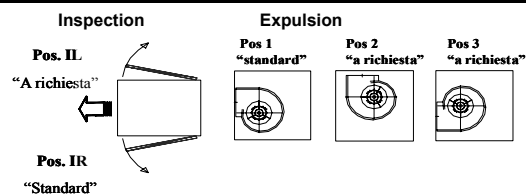
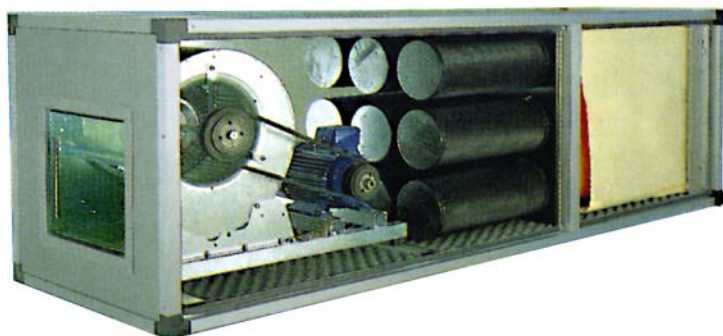
Mod: GF30-2V

Production code: GFPD27



Diamond
catering equipment

TECHNIQUE CARD
GFPD27

 2 SPEED TRANSMISSION FILTRATION UNIT WITH
 ACTIVATED CARBON FILTERS 400/3/50


- . Aluminium profiled structure side panels made of plastified sheet zinc
- . Panels double walled, easy to remove
- . Head and sound insulation made of polyurethane
- . Double inlet centrifugal fan with transmission motor 2 speed IP55 400/3/50 assembled on belt-stretcher slides, matched to the fan wheel through pulleys and belts, ant vibrating supporters
- . Synthetics filters efficacy 85% gravimetric (G3) class EN-779
- . Bag filters efficacy 85% metric-colour (F7) classe EN-779
- . Implemented activated carbon filters E207

Total dimensions cm - LxPxH 67 x 200 x 67	Expulsion hole cm AxB - E 30 x 35 - 15
Aspiration part cm - P1 0	Rpm motor 1400 / 900
Power Kw 1,1 / 0,37	Pressure Pa 250
Free air m3/h 2600	Synthetic filters - n° - dimensions n° 1 - 59 x 59 x 5
Bag filters - n° - dimensions n° 1 - 59 x 59 x 5	Activated carbon filters - n° n° 9 cartridges
volume without packaging m3 0,9	
weight without packaging kg 190	

NOTE: _____