

06/2018

Mod: GTBT6/TSA

Production code: ABOG5001-DM




Diamond
catering equipment

Modello - Model - Model - Gerätetyp - Modelo		ABOG5003		ABOG5002		ABOG5001		ABOG5021		ABOG5019		ABOG5018	
 Descrizione - Description Description - Beschreibung - Descripción				5T 1/1 700				5T 1/1 800					
 Tipo di teglie - Trays type Type de plateaux - Blechety - Tipo de fuentes				GN 1/1				600x400					
Capacità Massima Max load capacity Capacité maximale Fassungvermögen - Número máximo N°				Teglie H=65 - Trays H=65 6 Plateaux H=65 - Bleche H=65 fuentes H=65				9					
Interasse griglie - Grids pitch Pas des grilles - Gitterabsatx - Intereje fuentes mm				75				50					
 Ciclo Positivo - Positive cycle Cycle positif - Positiver Zyklus (+90° ... +3°)		kg		20				20					
Ciclo Negativo - Negative cycle Cycle negatif - Negativer Zyklus (+90°-18°) kg				12				12					
 Dimensioni esterne - External Dimension Dimensions externes - ußenabmessungen - Dimensiones externas													
Lunghezza - Width -Largeur - Breite - Anchura mm				1242				1242					
Profondità / con porte aperte - Depth / with open doors Profondeur avec portes ouverte Tiefe/mit geöffneteter Tü - Profundidad / con puerta abierta mm				680/1445				750/1545					
Altezza - Height - Hauteur - Höhe - Altura mm				860				860					
 Dimensioni interne - Internal Dimension Dimensions internes - Innenabmessungen - Dimensiones internas													
Lunghezza - Width -Largeur - Breite - Anchura mm				664				664					
Profondità - Depth Profondeur - Tiefe - Profundidad mm				350				420					
Altezza - Height - Hauteur - Höhe mm				540				540					
 Sbrinamento - Defrost - Dégivrages - Abtauen - Descongelación				Manuale a ventilazione - Manual air defrosting Manuelle à ventilation - Umluftabtauung - Manual con ventilación									
Evaporazione acqua sbrinamento - Evaporation of defrost water Evaporation eau de dégivrage - Tauwasser verdunstung - Evaporación agua de condensación				Manuale - Manual Manuelle - Handentleerung - Manual									
 Compressor													
Model				NT2180GK				NT2180GK					
Potenza - Power - Puissance - Leistung HP				1				1					
T° Evaporation °C				-25				-25					
Potenza frigorifera - Refrigerant Power Puissance frigorifique - Kälteleistung watt				950				950					
 Refrigerante - Refrigerant type Réfrigérant type - Kältemitteltyp - Refriante				R404A				R404A					
Quantità di refrigerante - Refrigerant quantity Quantité de réfrigérant - Kältemittelmenge gr				1000				1000					
 Potenza assorbita - Total Power Puissance - Leistung - Potencia		W - A		1050 - 5				1050 - 5					
Tensione alimentazione - Supply Voltage Tension d'alimentation - Anschlussspannung - Alimentación V				230V~ 50Hz				230V~ 50Hz					
 Peso Netto - Net weight Poids net - Netto Gewicht - peso neto		kg		125 (140)				135					

PA

**SCHEDA ALLACCIAMENTI - CONNECTION CARD – ANSCHLUSSSCHEMA
FICHE DES RACCORDEMENTS- FICHA DE ENLACES**

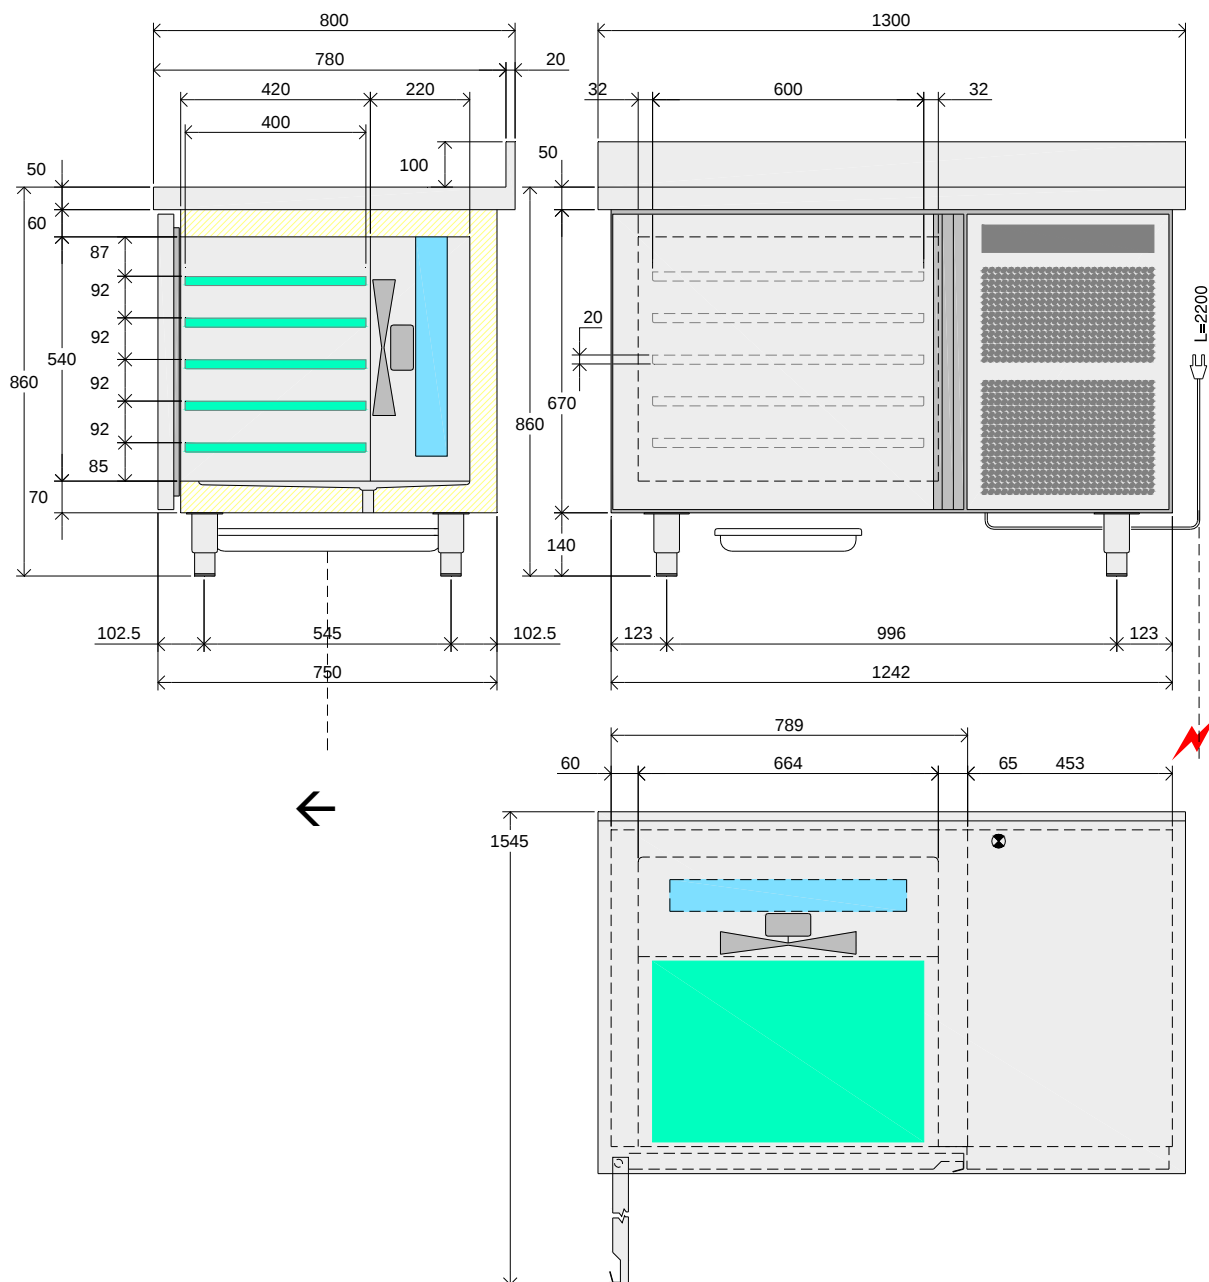

Scarico acqua

Water Drain

Vidage Eau

Wasserabfluss

Evacuacion Agua



Allacciamento Elettrico

Electric Connection


Branchement Electrique

Elektroanschluss

Conexiòn elètrica

GN

SCHEDA ALLACCIAMENTI - CONNECTION CARD - ANSCHLUSSSCHEMA
FICHE DES RACCORDEMENTS- FICHA DE ENLACES

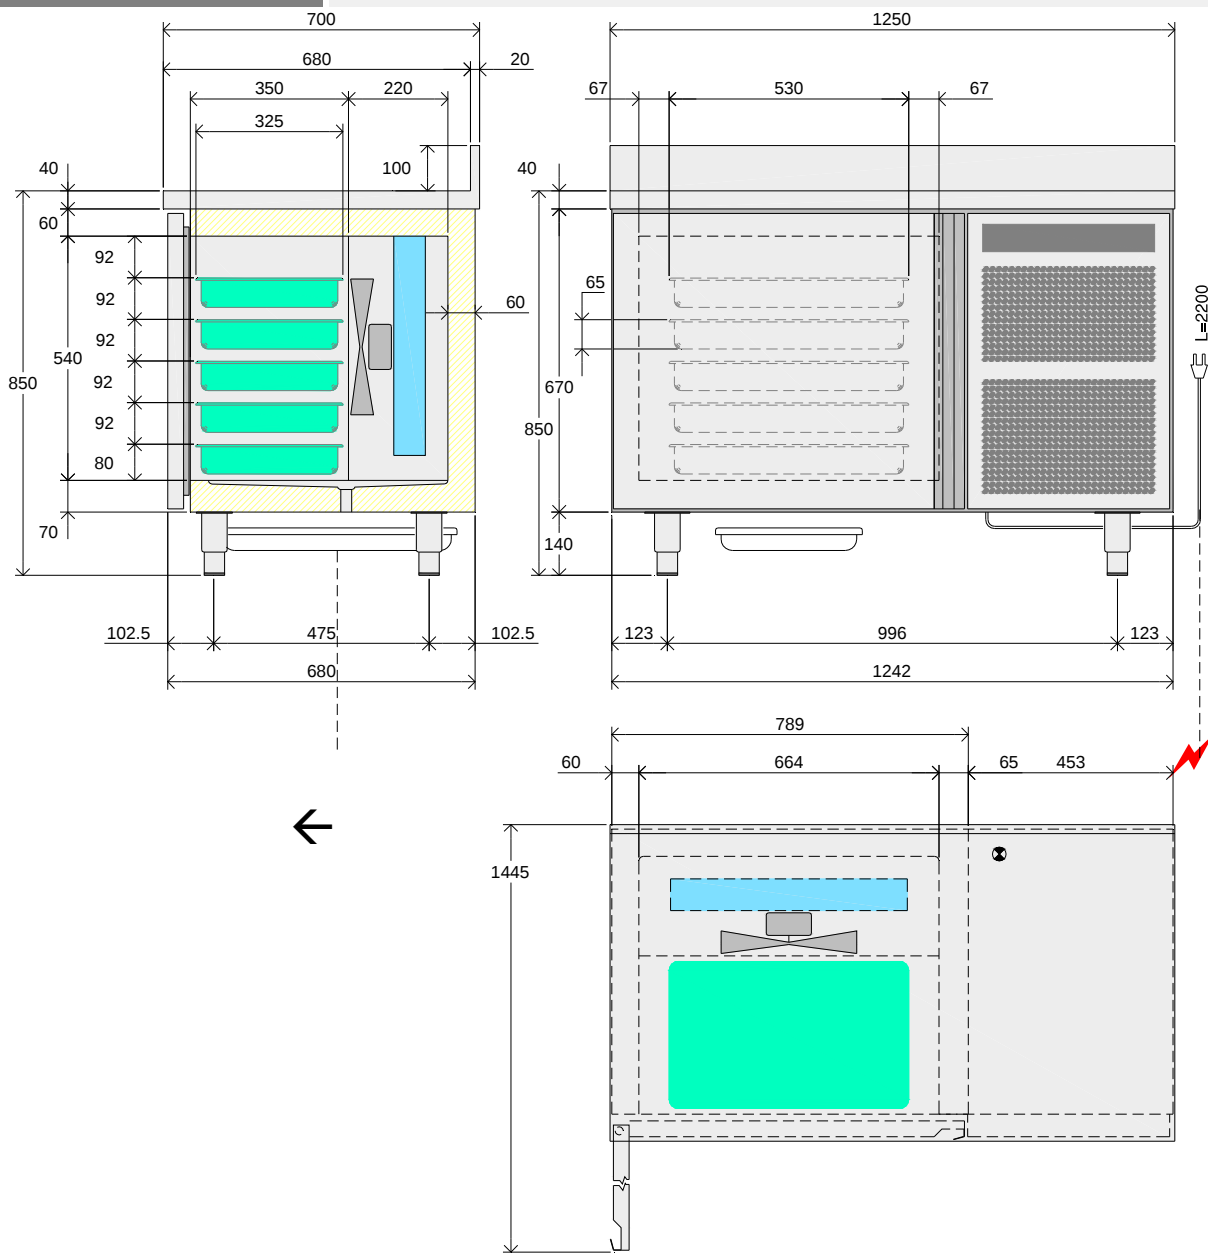

	Scarico acqua
	Water Drain
	Vidage Eau
	Wasserabfluss
	Evacuacion Agua

	Allacciamento Elettrico
	Electric Connection
	Branchement Electrique
	Elektroanschluss
	Conexiòn elètrica

SCHEDA ALLACCIAMENTI - CONNECTION CARD – ANSCHLUSSSCHEMA
FICHE DES RACCORDEMENTS- FICHA DE ENLACES

