


**11/2019**

# **Mod: HBM-60T/VV(230/3)**

**Production code: MX60P**

## 1.3 Technical characteristics

FIG. 1

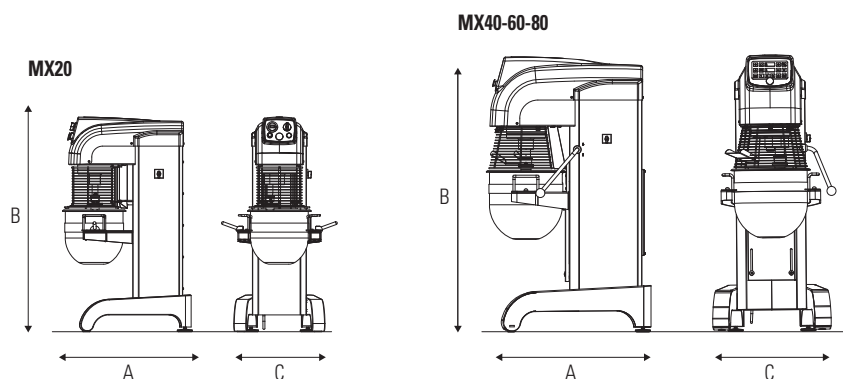

| Model   | Capacity<br>Lt | Speed<br>Rpm     | Volt     | Power<br>Kw | Dimensions mm |   |   | Weight<br>Kg |
|---------|----------------|------------------|----------|-------------|---------------|---|---|--------------|
|         |                |                  |          |             | A             | C | B |              |
| MX20T   | 20             | 30/60/120        | 400/50/3 | 1,1         | 700x500x1200  |   |   | 110          |
| MX40T   | 40             | 30/60/120        | 400/50/3 | 1,3         | 910x650x1520  |   |   | 250          |
| MX60T   | 60             | 30/60/120        | 400/50/3 | 1,7         | 1000x680x1600 |   |   | 280          |
| MX80T   | 80             | 30/60/120        | 400/50/3 | 1,7         | 1000x680x1600 |   |   | 290          |
| MX20P/M | 20             | min.30 / max 120 | 230/50/1 | 0,75        | 700x500x1200  |   |   | 110          |
| MX20P   | 20             | min.30 / max 120 | 400/50/3 | 0,75        | 700x500x1200  |   |   | 110          |
| MX40P/E | 40             | min.30 / max 120 | 400/50/3 | 2,2         | 910x610x1520  |   |   | 250          |
| MX60P/E | 60             | min.30 / max 120 | 400/50/3 | 3           | 1000x680x1600 |   |   | 280          |
| MX80P/E | 80             | min.30 / max 120 | 400/50/3 | 3           | 1000x680x1600 |   |   | 290          |

## 1.4 Electrical diagrams

For electrical diagrams refer to FIG. (page...)

## 1.5 Area occupied by the operator

Under normal operating conditions and for optimal use of the machine's capacities, the operator requires the area outlined in FIG.2.