



MOD : HP200T-6R

Production code : STM040G012-DI

09/2023



INDICATIVE PRODUCT IMAGE

Product file

Type	split
Mounting	Horizontal
Code	HP200T-6R
Range	ST
Condensation	Air
Net weight	123.5 kg
PED	1
Defrost	Electrical
Expansion	Valve
Application	MBP
Refrigerant	R452A

Dimensions

Width L	930 mm
Depth P	680 mm
Height H	460 mm

Pipe fittings

Liquid diam.	10 mm
Suction diam.	16 mm

Absorptions

Power consumption	2110 W
Current consumption	6.2 A
Potenza sbrinamento	1950 W

Condenser

Fan-motors no.	2
Diameter	350 mm
Air flow	3962 m³/h


Unit cooler

Fan-motors no.	3
Diameter	254 mm
Air flow	2167 m³/h
Air throw	7 m


Compressor

Type	Hermetic
Compressors no.	1
Brand	TECUMSEH EUROPE
Voltage	400/3/50
Displacement	43.3 cm³

Technical data - HP200T-6R

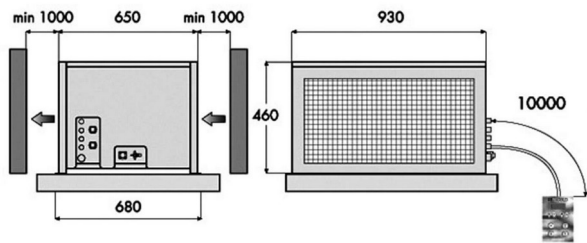

Technical data - HP200T-6R

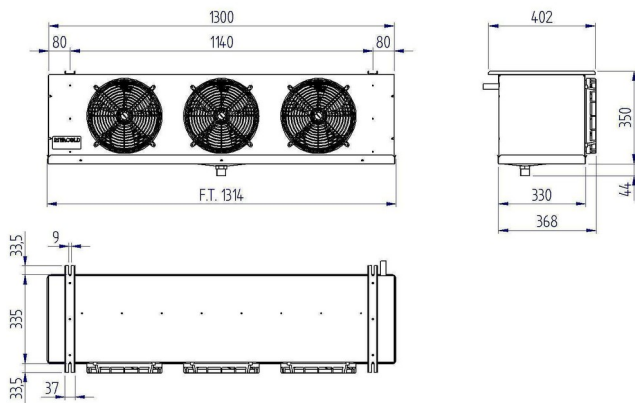

Refrigerating capacity table (W) - HP200T-6R - Refrigerant: R452A

TA \ Cold room Temp	-5 °C	0 °C	5 °C
25 °C	3232 (31.3 m³)	3825 (34.6 m³)	4459 (61.2 m³)
32 °C	2937 (27.1 m³)	3490 (34.3 m³)	4080 (53.2 m³)
43 °C	2420 (19.5 m³)	2904 (25.2 m³)	3417 (32.8 m³)

Values referred to :

Suction gas : +20°C

Subcooling : 0K

Superheat : 100%

Compressor absorption :

Te -5°C (HBP); Tcond +50°C

Te -10°C (MBP); Tcond +50°C

Te -30°C (LBP); Tcond +50°C



INDICATIVE PRODUCT IMAGE

General features

- Self-supporting casing in zinc-plated metal sheet, which is coated with epoxy powder and easily removable panels for fast access to components during inspection or maintenance operations
- Hermetic or semi-hermetic compressors with motor thermic protection
- Electronic control board that can be programmed according to different user requirements
- Control panel installed in a remote position
- Heat exchangers with copper and aluminium blocks
- Condensation by air (optional by water)
- Expansion by capillary tube or thermostatic valve
- Ventilation or heater automatic defrosting with programmable run duration and frequency
- Condensing water direct discharge
- Electronic card designed for connection in remote management (BMS) and LAN.

For Model up to 2x450

- Low pressure switch
- Remote control panel (10m)
- Door micro switch with 10m long cable
- Cold room light with 10m long cable
- Door heater cable for LBP items with 10m long cable
- Connecting cables evaporator/condensing unit L= 10m
- Power supply cable (L=2,5m)

For models 2x560 2x630

- Remote control panel 20m
- High-low pressure switch
- Pressure switches for condenser fan control
- Crankcase heater
- Package included