

03/2018

Mod: LM4-LSD

Production code: LP/40-SAVON




Diamond
catering equipment

Technical sheet Hand Washing Sink

Mounting of the accessories on the tank:

- 1 - Install the gooseneck in the hole on the right, (seal and no screw below).
- 2 - Fix the hose after the gooseneck
- 3 a) Install the Tempo on the support provided for this purpose, hole located under the tank, (the largest part in front, towards the tilting plate)
 b) Connect the Hose and the Tempo, the water outlet is under the tempo, under the arrow (see picture n°1)
- 4 - Install the mixer on the Tempo, no screws in the length of the room (photo n°2) (hot water on the left, cold water on the right)
- 5 - Install the bung and the siphon

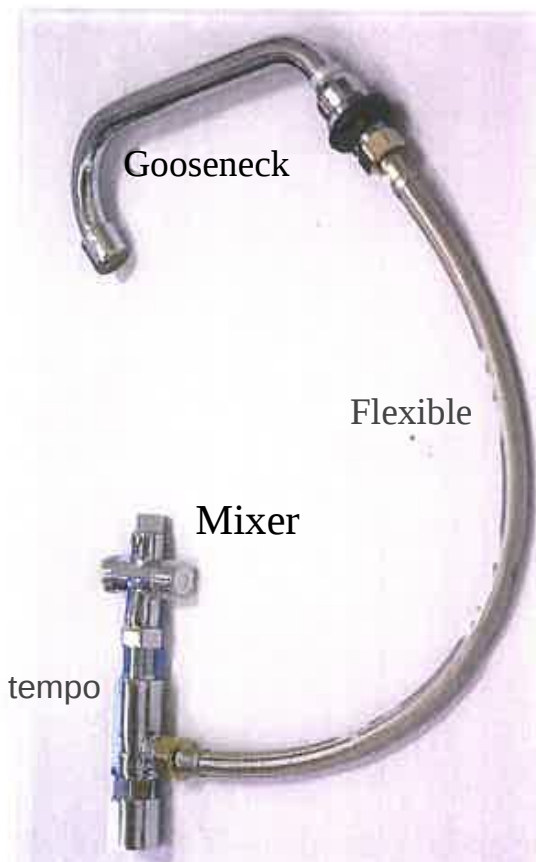


Bottom view



Be careful to the sense of direction of assembly!!!

The tempo mounted upside down inevitably flee and our after sales service, can not be held responsible.

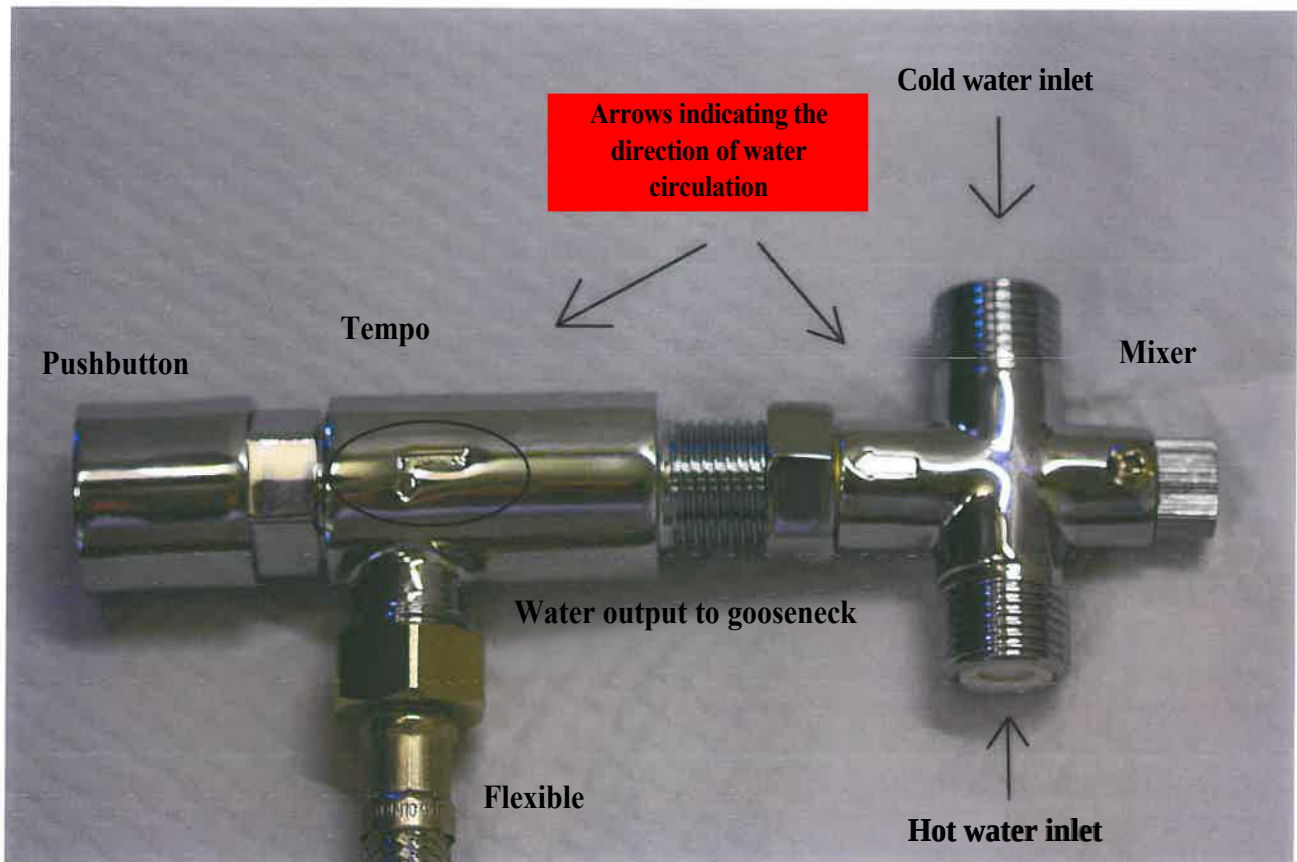

Be careful to the sense of direction of assembly!!!

The tempo mounted upside down inevitably flee and our after sales service, can not be held responsible.

