

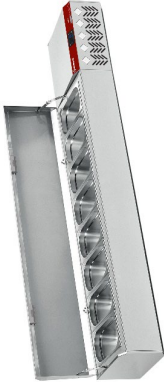





12/2022

Mod: SX160G/PP9

Production code: 10307712-B-G-0

Model	SX132G/CP9	SX175G/CP9	SX219G/CP9	SX160G/PP9	SX198G/PP9	SX249G/PP9	SY132G/CP9	SY175G/CP9	SY219G/CP9	SY160G/PP9	SY198G/PP9	SY249G/PP9
												
Production code	10307701-B-G-A	10307702-B-G-A	10307703-B-G-A	10307712-B-G-0	10307713-B-G-0	10307714-B-G-0	10309701-B-G-A	10309702-B-G-A	10309703-B-G-A	10309712-B-G-0	10309713-B-G-0	10309714-B-G-0
Description	GN1/4 topping shelf with SS lid	GN1/4 topping shelf with SS lid	GN1/4 topping shelf with SS lid	GN1/4 topping shelf with glass top	GN1/4 topping shelf with glass top	GN1/4 topping shelf with glass top	GN1/3 topping shelf with SS lid	GN1/3 topping shelf with SS lid	GN1/3 topping shelf with SS lid	GN1/3 topping shelf with glass top	GN1/3 topping shelf with glass top	GN1/3 topping shelf with glass top
Range (°C)	0 + 8	0 + 8	0 + 8	0 + 8	0 + 8	0 + 8	0 + 8	0 + 8	0 + 8	0 + 8	0 + 8	0 + 8
Operating Mode	Static	Static	Static	Static	Static	Static	Static	Static	Static	Static	Static	Static
External Dimensions												
Width (mm)	1330	1795	2260	1610	2020	2560	1330	1795	2260	1610	2020	2560
Depth (mm)	324	324	324	324	324	324	384	384	384	384	384	384
Height (mm)	387~401	387~401	387~401	387~401	387~401	387~401	387~401	387~401	387~401	387~401	387~401	387~401
Internal Dimensions												
Width (mm)	815	1280	1745	1095	1505	2045	815	1280	1745	1095	1505	2045
Depth (mm)	247	247	247	247	247	247	307	307	307	307	307	307
Height (mm)	150	150	150	150	150	150	150	150	150	150	150	150
Gross capacity (L)	30	47	65	41	56	76	38	59	80	50	69	94
Defrost												
Type of defrost	No defrost	No defrost	No defrost	No defrost	No defrost	No defrost	No defrost	No defrost	No defrost	No defrost	No defrost	No defrost
Compressor												
Brand	Huayi / Cubigel	Huayi / Cubigel	Huayi / Cubigel	Huayi / Cubigel	Huayi / Cubigel	Huayi / Cubigel	Huayi / Cubigel	Huayi / Cubigel	Huayi / Cubigel	Huayi / Cubigel	Huayi / Cubigel	Huayi / Cubigel
Model	NBC30RA	NBC30RA	NBC30RA	NBC30RA	NBC30RA	NBC30RA	NBC30RA	NBC30RA	NBC30RA	NBC30RA	NBC30RA	NBC30RA
Power (hp)	1/10	1/10	1/5	1/10	1/10	1/5	1/10	1/10	1/5	1/10	1/10	1/5
Cooling power (W)	237	237	357	237	237	357	237	237	357	237	237	357
Evaporation temp. / Condensation temp. (°C)	-10 / +45	-10 / +45	-10 / +45	-10 / +45	-10 / +45	-10 / +45	-10 / +45	-10 / +45	-10 / +45	-10 / +45	-10 / +45	-10 / +45
Climate class (Temp./RH)	4 (30°C / 55%)	4 (30°C / 55%)	4 (30°C / 55%)	4 (30°C / 55%)	4 (30°C / 55%)	4 (30°C / 55%)	4 (30°C / 55%)	4 (30°C / 55%)	4 (30°C / 55%)	4 (30°C / 55%)	4 (30°C / 55%)	4 (30°C / 55%)
Refrigerant												
Refrigerant fluid / GWP	R290 / 3	R290 / 3	R290 / 3	R290 / 3	R290 / 3	R290 / 3	R290 / 3	R290 / 3	R290 / 3	R290 / 3	R290 / 3	R290 / 3
Refrigerant charge (kg)	0,090	0,090	0,100	0,090	0,090	0,100	0,090	0,090	0,100	0,090	0,090	0,100
Electronic Controller												
Brand	Dixell	Dixell	Dixell	Dixell	Dixell	Dixell	Dixell	Dixell	Dixell	Dixell	Dixell	Dixell
Model	XR20CH	XR20CH	XR20CH	XR20CH	XR20CH	XR20CH	XR20CH	XR20CH	XR20CH	XR20CH	XR20CH	XR20CH
Electrical												
Power input (W/A)	135 / 1,1	135 / 1,1	190 / 1,0	135 / 1,1	135 / 1,1	190 / 1,0	135 / 1,1	135 / 1,1	190 / 1,0	135 / 1,1	135 / 1,1	190 / 1,0
Power supply (V/Hz)	220~240/50	220~240/50	220~240/50	220~240/50	220~240/50	220~240/50	220~240/50	220~240/50	220~240/50	220~240/50	220~240/50	220~240/50
220V/60Hz	no	no	no	no	no	no	no	no	no	no	no	no
Packaging Details												
Packed volume (m³)	0,23	0,27	0,34	0,27	0,34	0,41	0,32	0,40	0,48	0,26	0,32	0,40
Gross weight (kg)	44	54	65	66	72	95	49	59	69	69	77	100
Net weight (kg)	32	39	46	53	57	76	37	44	51	55	62	82

* Last update: 21. June 2021