

03/2015

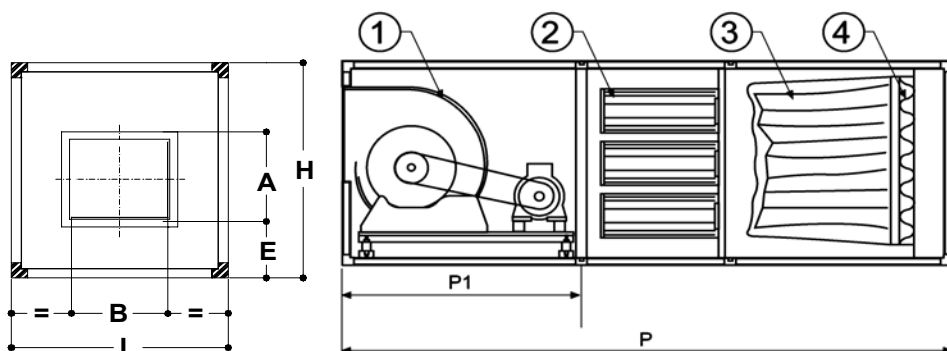
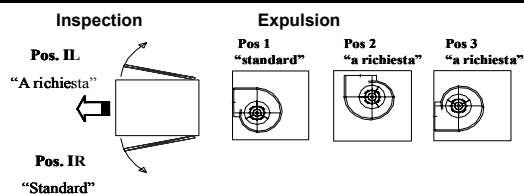
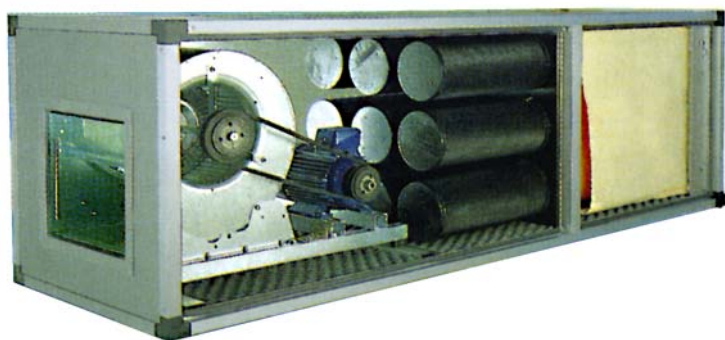
# **Mod: GF60-2V**

**Production code: GFPD56**



**Diamond**  
catering equipment

**TECNIQUE CARD**
**GFPD56**

 2 SPEED TRANSMISSION FILTRATION UNIT WITH  
 ACTIVATED CARBON FILTERS 400/3/50


- . Aluminium profiled structure side panels made of plastified sheet zinc
- . Panels double walled, easy to remove
- . Head and sound insulation made of polyurethane
- . Double inlet centrifugal fan with transmission motor 2 speed IP55 400/3/50 assembled on belt-stretcher slides, matched to the fan wheel through pulleys and belts, ant vibrating supporters
- . Synthetics filters efficacy 85% gravimetric (G3) class EN-779
- . Bag filters efficacy 85% metric-colour (F7) classe EN-779
- . Implemented activated carbon filters E207

|                                                            |                                                                  |
|------------------------------------------------------------|------------------------------------------------------------------|
| Total dimensions cm - LxPxH<br><b>128 x 204 x 80</b>       | Expulsion hole cm AxH - E<br><b>43 x 49 - 16</b>                 |
| Aspiration part cm - P1<br><b>74</b>                       | Rpm motor<br><b>1400 / 900</b>                                   |
| Power Kw<br><b>2,2 / 0,75</b>                              | Pressure Pa<br><b>250</b>                                        |
| Free air m3/h<br><b>5200</b>                               | Synthetic filters - n° - dimensions<br><b>n° 2 - 59 x 59 x 5</b> |
| Bag filters - n° - dimensions<br><b>n° 2 - 59 x 59 x 5</b> | Activated carbon filters - n°<br><b>n° 14 cartridges</b>         |
| volume without packaging m3                                | <b>2,09 (0,76 - 1,33)</b>                                        |
| weight without packaging kg                                | <b>340</b>                                                       |

NOTE: \_\_\_\_\_