



MOD : SN170M-2L-R2

Production code : SFL006P001-DI


05/2025





Fiche technique / Technisches Datenblatt / Technical data sheet /
Scheda tecnica / Ficha técnica



SN170M-2L-R2

	Form	kW	T° Out	T° In -15°C		T° In -20°C		T° In -25°C		V			kg
				W/f	m3/Vol	W/f	m3/Vol	W/f	m3/Vol			m3/pack	
0.52-0.51-1	SN170M-2L-R2												
	2	0,58	25°C	1083	7,8	916	5,9	736	4	230/1N	50 Hz	71	0,55
			32°C	1037	7	873	5,4	723	3,7				
			43°C	963	5,9	805	4,6	660	3				
	SN201M-2M-R2												
	3	0,8	25°C	1391	11	1159	8,7	953	5,8	230/1N	50 Hz	91	0,55
			32°C	1343	10,6	1115	8,3	913	5,6				
			43°C	1267	9,3	1046	7,2	849	4,7				
	SN203T-4P-R2												
	4	1,2	25°C	2078	20,2	1731	16,6	1423	11,1	400/3N	50 Hz*	155,5	1,06
			32°C	1995	19,8	1655	15,5	1351	10,5				
			43°C	1860	17,3	1532	13,7	1238	8,8				
	SN400T-4N-R2												
	4	1,5	25°C	2632	31,1	2224	25,9	1854	17,9	400/3N	50 Hz*	163	1,06
			32°C	2544	30,1	2142	25	1776	16,9				
			43°C	2404	26,3	2011	21,4	1652	14,5				

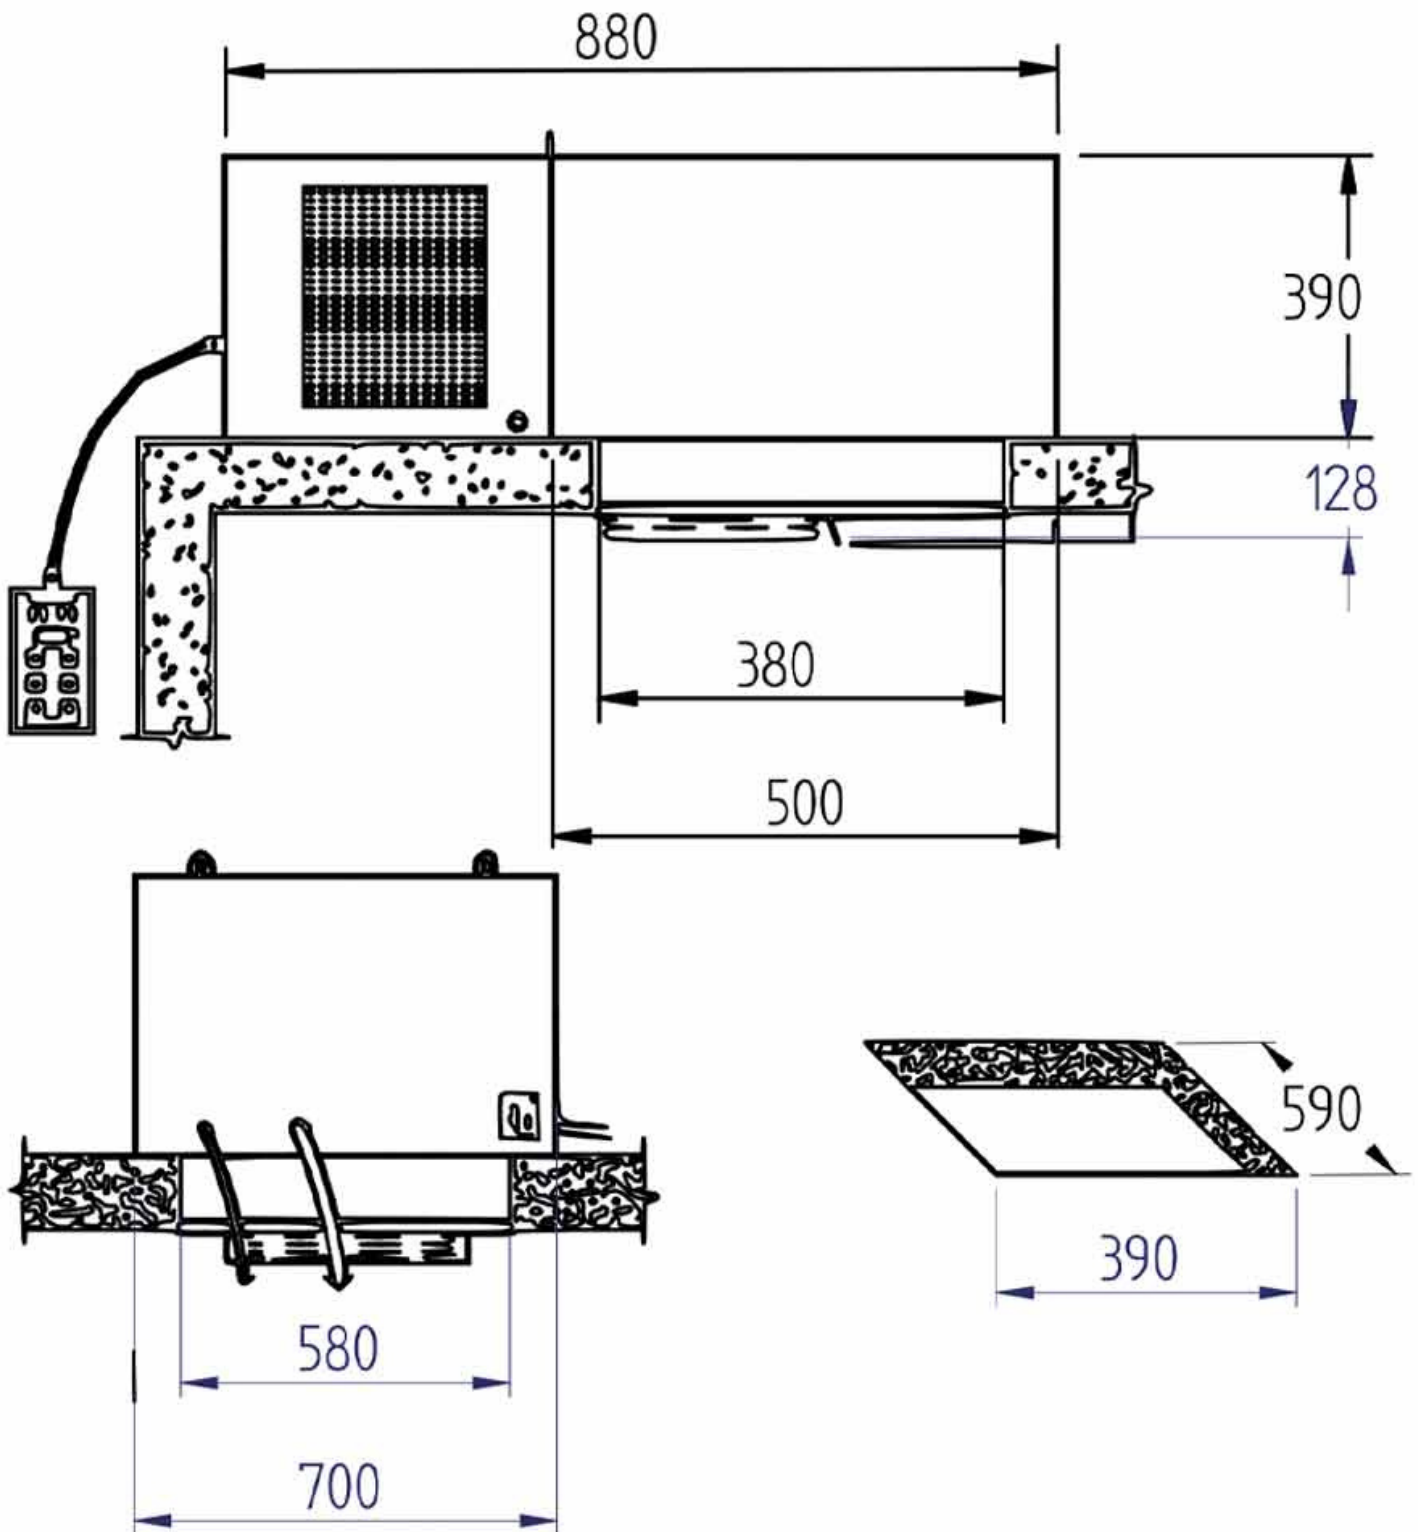

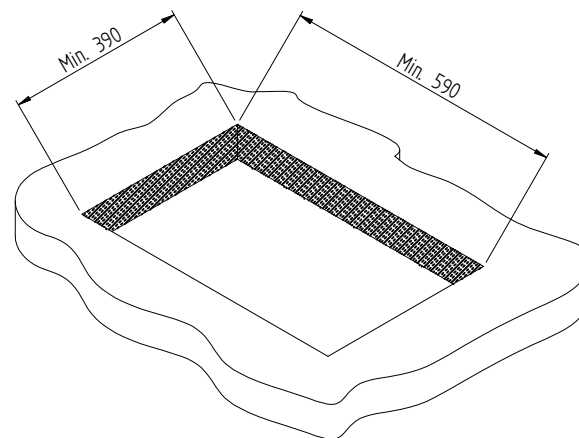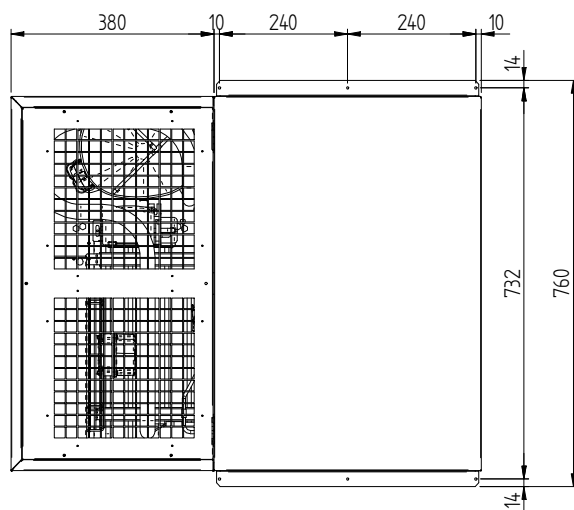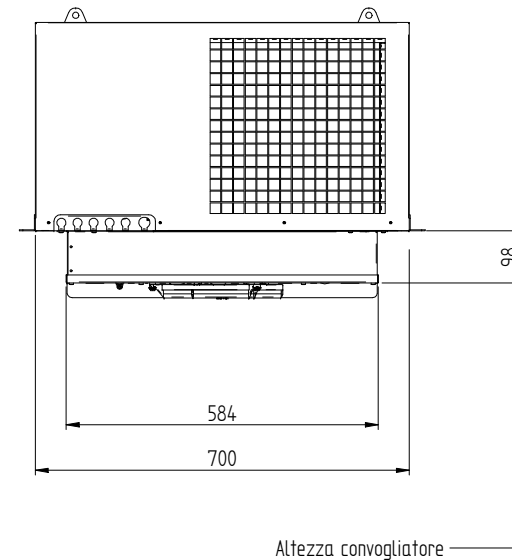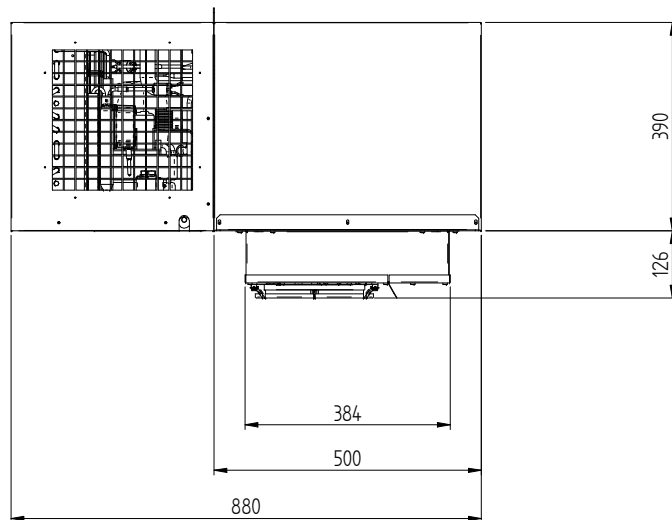

Sp. 60mm MBP - HBP
Sp. 100mm LBP