


## Refrigerated display case with bottom

- ► Stainless steel top AISI 304, th. 12/10
  ► Display case with 3 stainless steel grid shelves
- ► Refrigeration by means of ventilated fans
- ▶ Polycarbonate flaps on customer side, sliding doors on operator side
- ▶ With condensing unit Defrost is performed through stop of the compressor
- ▶ Kit for condensed water evaporation
- ▶ Digital contrai system for temperature adjustment and defrosting
- ► LED lighting
- ▶ Valve expansion



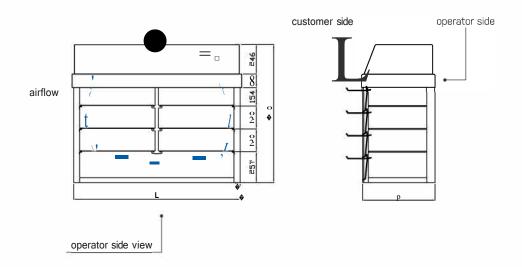

	3 GN1/1	4 GN1/1
Code	8046039HC	8046041HC
External dimensions [mm] LxPxH	1130x635x1150	1455x635x1150
Temperature in the display case [°C]	+4/+12	+4/+12
Doors w/flaps on customer side [N°]	4 + 4	4 + 4
Sliding doors on operator side [N°]	2	2
Refrigerant gas	R290	R290
Cooling power at -15°C [W]	400	1100
Total power [Kw]	0,25	0,6
Supply voltage (50Hz)	230V 1F+N	230V 1F+N