





**MOD : LFD-06-LX**

**Production code : P010209DIA.KR**


**03/2025**

## Digital Line

- ▶ Made of stainless steel
- ▶ Energy Room : cordierite dual refractory stone hob
- ▶ Maximum cooking temperature: 400 °C
- ▶ Independent and digital temperature set
- ▶ Armored heating elements
- ▶ Extra-insulation 50mm
- ▶ Door with double glass
- ▶ Possibility of overlapping up to 3 chambers
- ▶ Double ergonomic handle with slowed opening
- ▶ Panoramic glass for a perfect visibility of the cooking chamber
- ▶ Led cooking chamber lighting system
- ▶ Indoor humidity adjustment
- ▶ Premium finishes
- ▶ Digital control
- ▶ Option : full-coverage of the cooking chamber in refractory stone

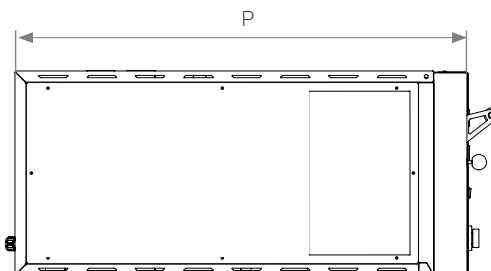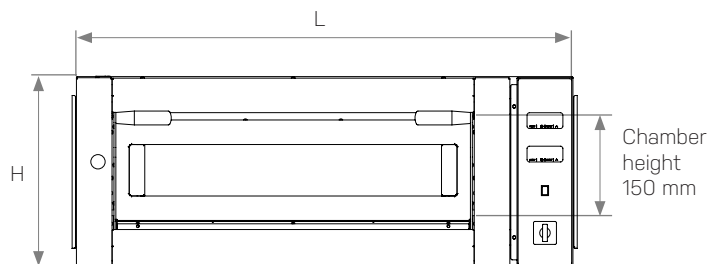


## Single chamber




| Code                            | P010208       | P010209       | P010210       | P010211       |
|---------------------------------|---------------|---------------|---------------|---------------|
| External dimensions [mm] WxDxH  | 1060x890x400  | 1060x1240x400 | 1390x915x400  | 1390x1270x400 |
| Chamber dimensions [mm] WxDxH   | 700x700x150   | 700x1050x150  | 1050x700x150  | 1050x1050x150 |
| Pizza dimensions [mm]           | 4x ø350       | 6x ø350       | 6x ø350       | 9x ø350       |
| Supply voltage [50Hz]           | 400V 3Ph+N    | 400V 3Ph+N    | 400V 3Ph+N    | 400V 3Ph+N    |
| Total power [KW]                | 7,2           | 8,85          | 10,2          | 13,65         |
| H07RNF cable section [mm²]      | 5G4           | 5G4           | 5G4           | 5G6           |
| Packaging dimensions [mm] WxPxH | 1130x1100x620 | 1130x1475x620 | 1130x1475x620 | 1480x1450x620 |
| Net weight [Kg]                 | 110           | 140           | 145           | 165           |
| Gross weight [Kg]               | 125           | 155           | 160           | 180           |

## Double chamber



| Code                            | P010212       | P010213       | P010214       | P010215       |
|---------------------------------|---------------|---------------|---------------|---------------|
| External dimensions [mm] WxDxH  | 1060x890x730  | 1060x1240x730 | 1390x915x730  | 1390x1270x730 |
| Chamber dimensions [mm] WxDxH   | 700x700x150   | 700x1050x150  | 1050x700x150  | 1050x1050x150 |
| Pizza dimensions [mm]           | 8x ø350       | 12x ø350      | 12x ø350      | 18x ø350      |
| Supply voltage [50Hz]           | 400V 3Ph+N    | 400V 3Ph+N    | 400V 3Ph+N    | 400V 3Ph+N    |
| Total power [KW]                | 14,4          | 17,7          | 20,4          | 27,3          |
| H07RNF cable section [mm²]      | 5G6           | 5G6           | 5G10          | 5G16          |
| Packaging dimensions [mm] WxPxH | 1130x1100x950 | 1130x1475x950 | 1130x1475x950 | 1480x1450x950 |
| Net weight [Kg]                 | 175           | 240           | 255           | 275           |
| Gross weight [Kg]               | 195           | 260           | 275           | 295           |

# ALL-AROUND Kit

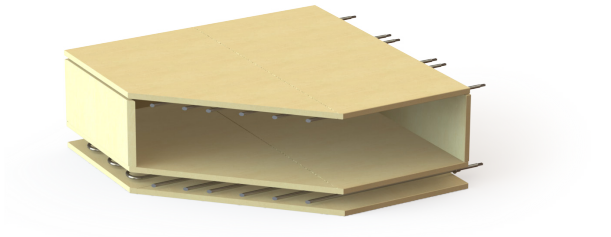

Full-coverage of the cooking chamber in refractory stone

| CODE    | ALL-AROUND | CHAMBER DIMENSIONS |
|---------|------------|--------------------|
| P041000 |            | 670 x 685 x 150    |
| P041001 |            | 670 x 1035 x 150   |
| P041002 |            | 1035 x 670 x 150   |
| P041003 |            | 1035 x 1035 x 150  |

All-Around option should be communicated at the order.