



MOD : WR-3G0P-RT

Production code : RF23A

12/2024

INOX | Blast Chillers

Blast chillers



GENERAL FEATURES

GN2/3 Counter top Blast chiller	•
Stainless Steel exterior and interior	•
Ventilated Cooling with Manual defrost	•
Plastic thermal-braker as chamber body frame (Heated wire)	•
Evaporator with anti-corrosion treatment	•
Foaming Agent Cyclopentane (60mm per side - CFC Free)	•
Digital Thermostat with Buzzer alarm	•
Opening door alarm	•
Error message directly in the display	•
Chilling chamber in stainless steel	•
Door microswitch for stop inner fan with open door	•
Needle probe fitted as standard	•
Removable Gasket	•
N.4 Adjustable feet	•
Temperature controlled or temporized blast chilling cycle	•
Automatic storage mode at the end of blast chilling cycle	•
Energy efficiency class: -	•

TECHNICAL SPECIFICATIONS

Capacity	Ch.7Kg/Fr.5Kg
Temperature	+10°C ~ -38°C
Consumption	N/A kWh/24h
Rated Power	420 W
Noise level	55 dB(A)
Net Weight	44 Kg
Gross Weight	52 Kg
External Dimensions (WxDxH mm)	660x640x437
Internal Dimensions (WxDxH mm)	340x365x270
Packaging dimensions (WxDxH mm)	700x680x525
Loading quantities 20'/40'/40'HQ	96/204/255

CERTIFICATION

CE RoHS


RF 23A



DETAILS



PRODUCT DIMENSIONS

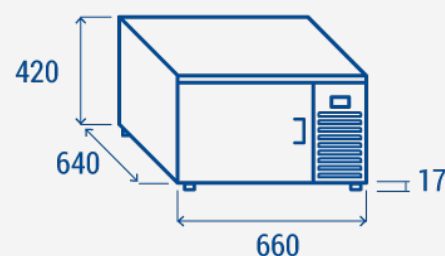

Diverso