

03/2023


Mod: SBET_XC-20

Production code: 228724


A - Included Components

1

6-10 GRIDS



20 GRIDS



A

IMPORTANT: For compliance with UK Water Supply (Water Fittings) Regulations the installer technician must provide a WRAS approved double check valve for each water connection, or other device no less effective that provides back-flow protection of at least fluid category three.


B - H2O Connections

2


⚠ PRESSURE
100 – 600 kPa
(1,0 – 6,0 bar / 14,5 – 87 psi)

- min 2 l/min - max 10 l/min

CWI1






CWI 2



Water Treatment System

- min 2,95 l/min - max 5,75 l/min


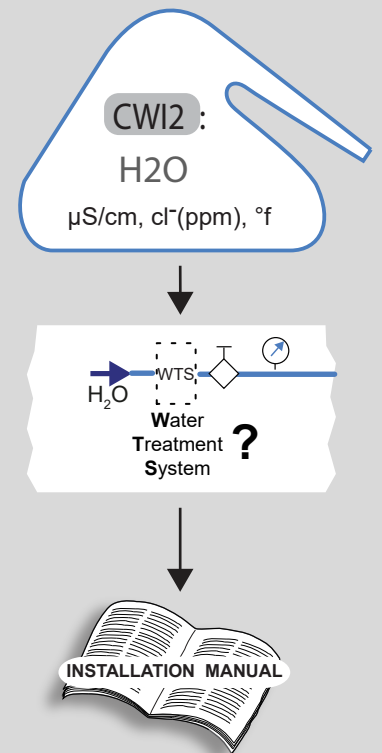
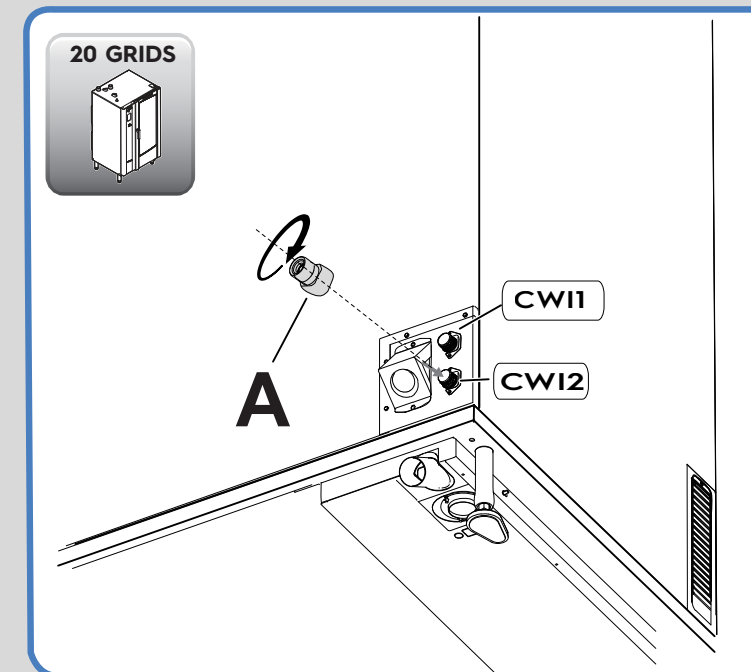
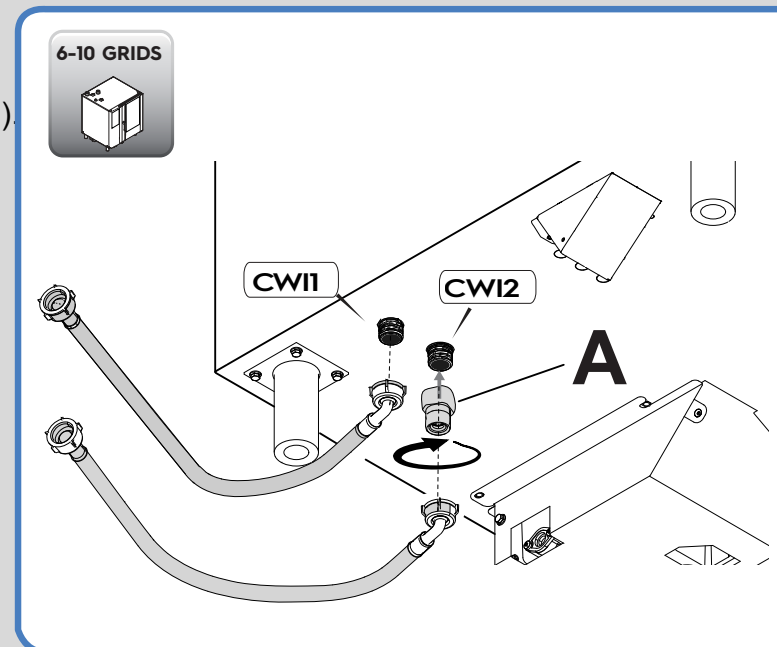


C - Drain Connection

3


Drain Hose ø50mm
smooth fitting

AUS only: The appliance shall be drained to a certified waste trap positioned at the drainage system connection point.

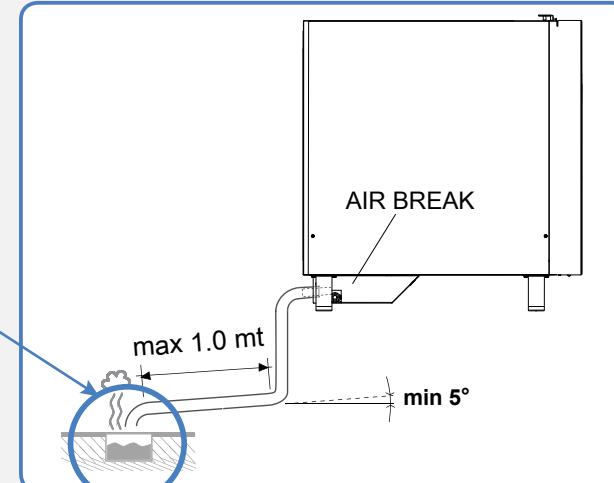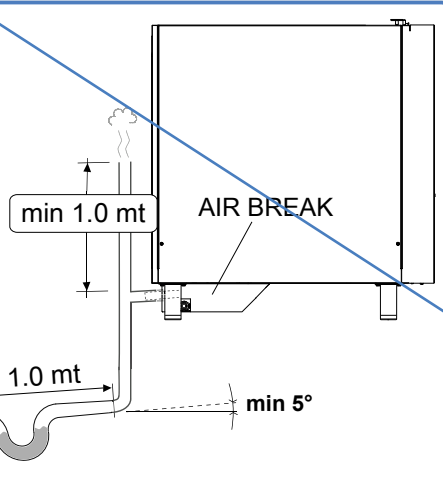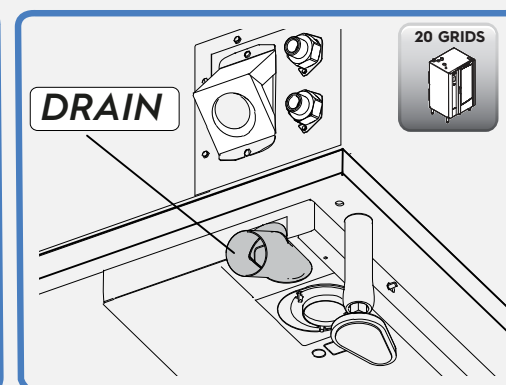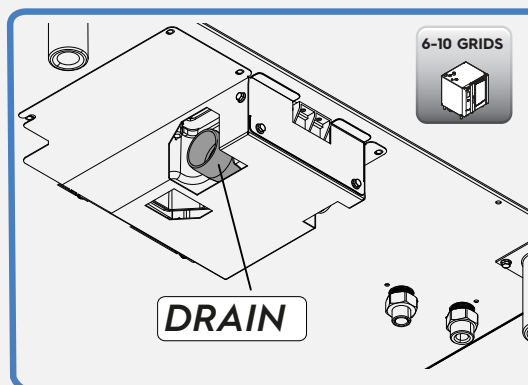


(GAS OVEN ONLY)

4

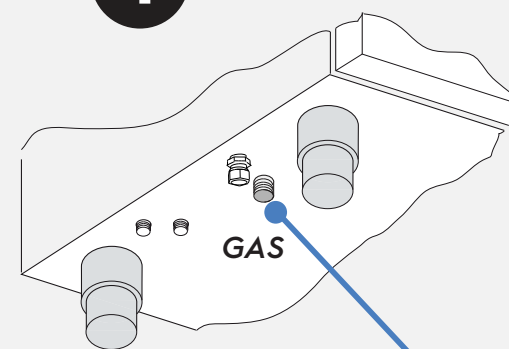

GAS PRESSURE




GAS PRESSURE
REGULATOR

ø1" 20 GRIDS 1/1
ø1" 20 GRIDS 2 /1
ø1" 10 GRIDS 2/1

ø1/2" 6 GRIDS 1/1
ø1/2" 16 GRIDS 2 /1
ø1/2" 10 GRIDS 1/1


GAS INLET →

D - Gas Connections

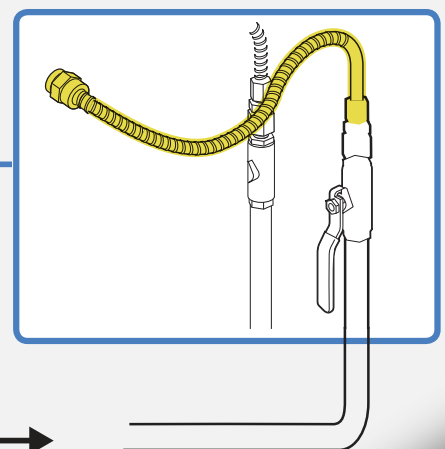


E - Electrical connections

WIRING
DIAGRAM

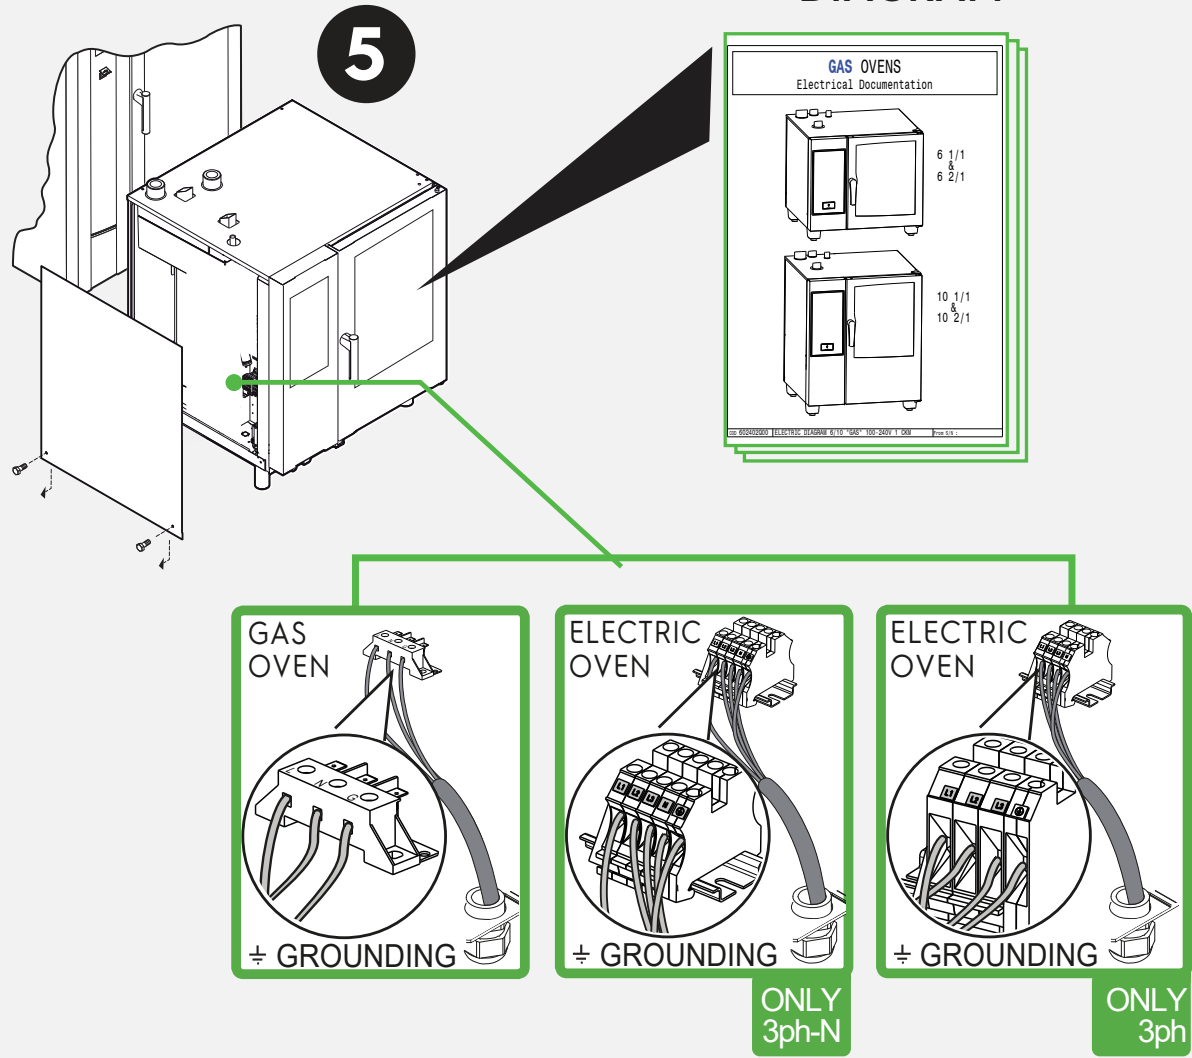

F - Positioning

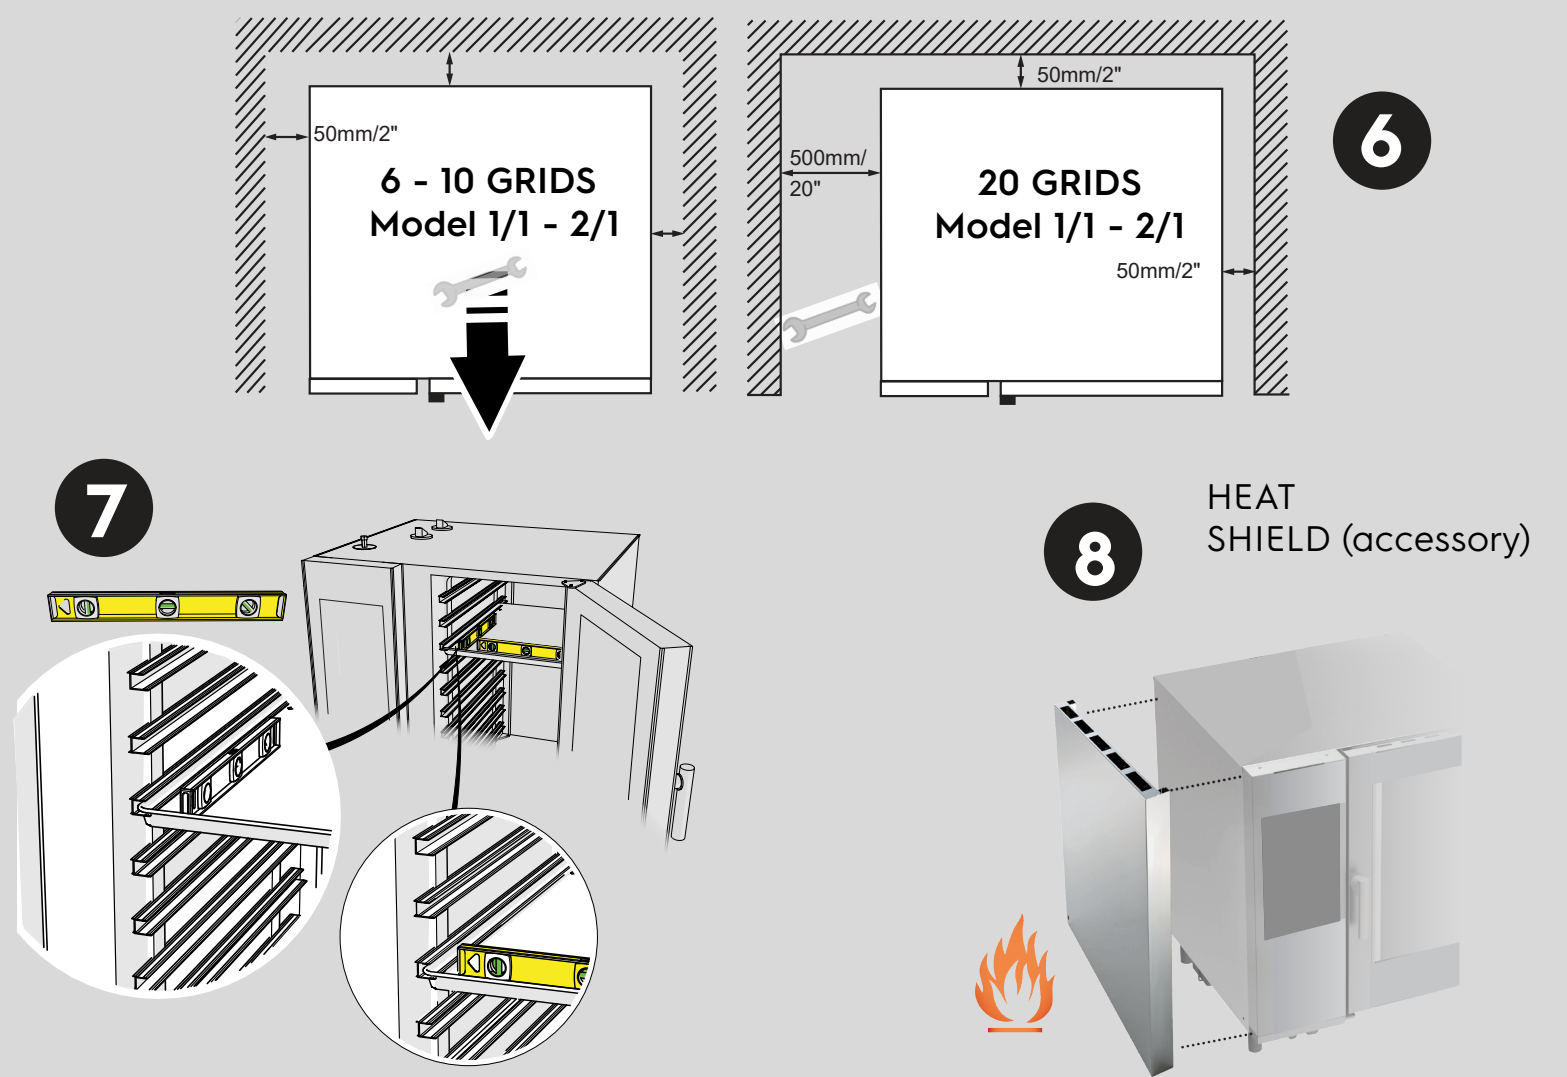

G - Set up

WIZARD

