




1.00 Start

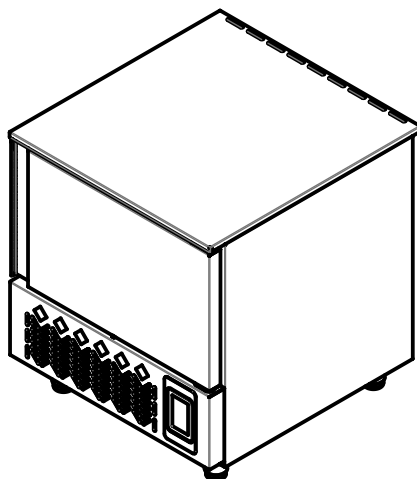


2.00 Unscrew the rear screw (a)

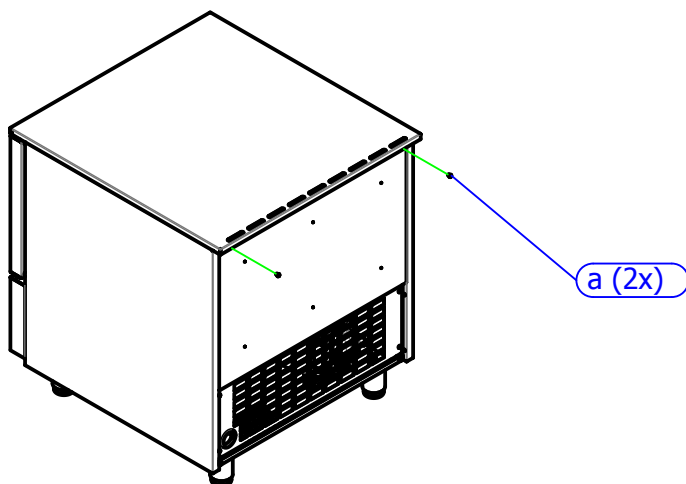


3.00 Remove the upper surface (A) by performing a partial rotation on the front surface

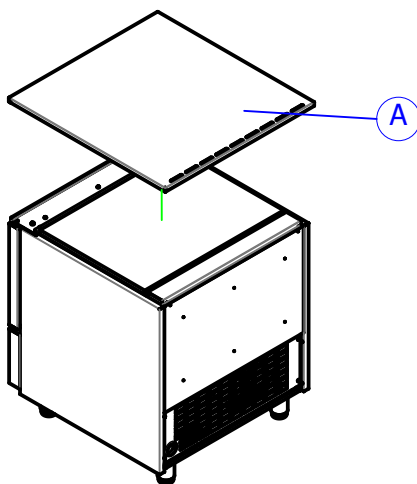


4.00 separate the top and place it so as not to damage the appliance

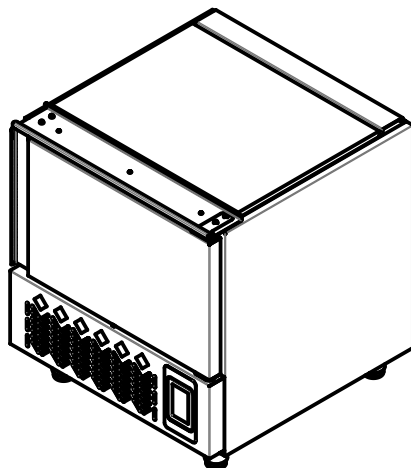


5.00 Unscrew the fixing screws (b,c) of the front reinforcement (B) and, at the same time, hold the door (C) with your free hand

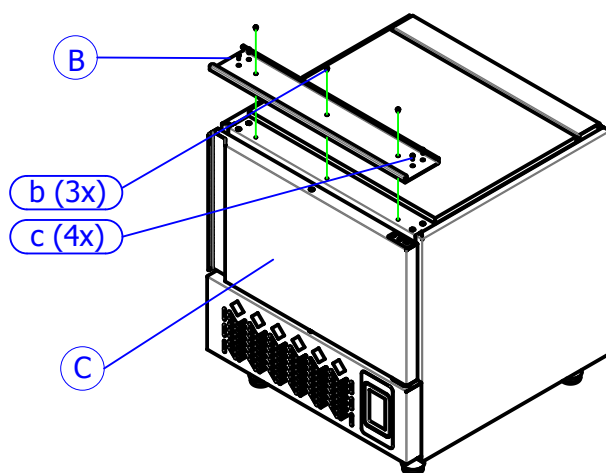


5.10 Release the door by lifting it with the reinforcement

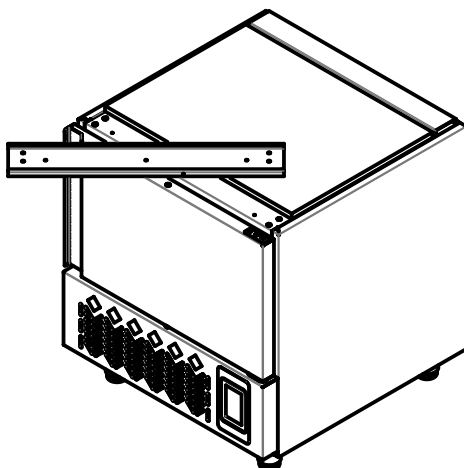

6.00 separate the front reinforcement and place it so as not to damage the appliance

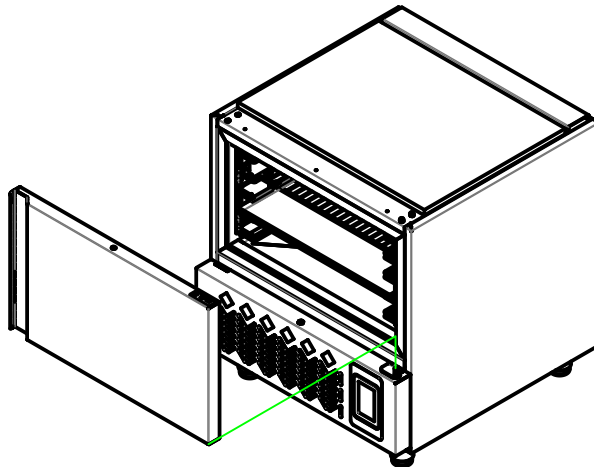

7.00 Unscrew the fixing screws (d) of the assembled dashboard (D)

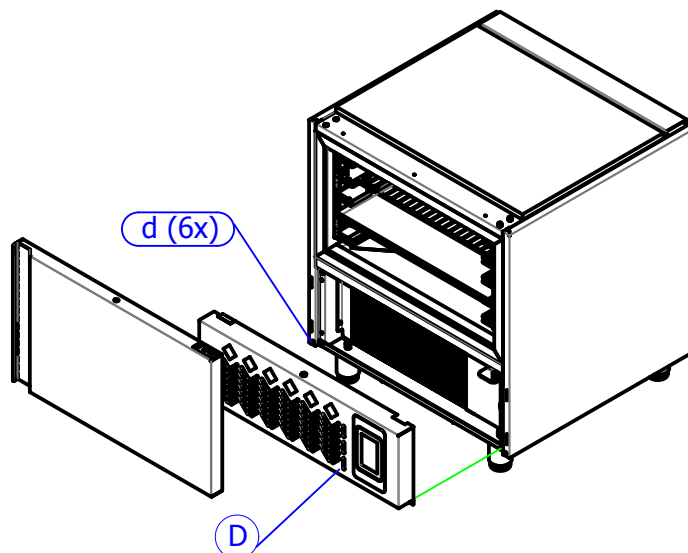


8.10 Remove (Cut) the micro-Joint from the assembled dashboard (D)

8.20 Unscrew the fixing screws (e) of the lower hinge (E)


8.30 Rotate the door and remove:

- Upper Hinge (F) and its screw (f)
- Magnet (G)
- Screw (g)


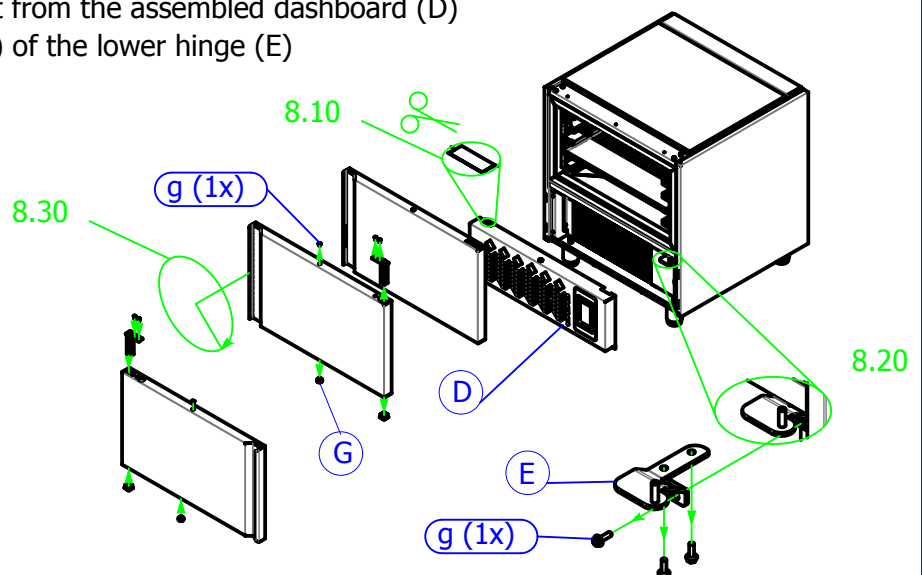


8.40 install the components previously removed by reversing their position

9.00 use the lower hinge for the new direction of door opening and fix it using the screw (Ph. 8.20)

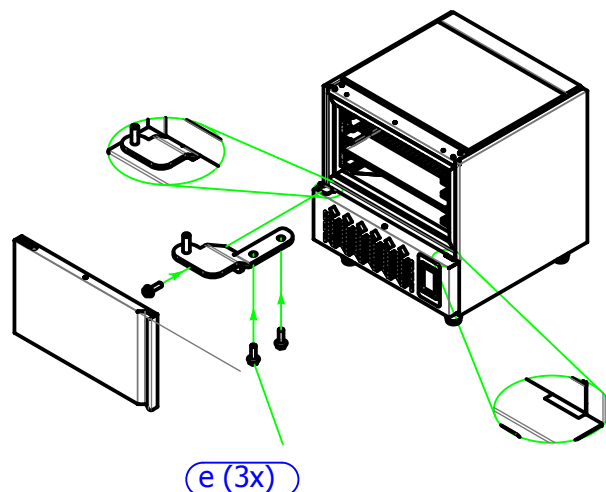

10.00 Insert the pin of the door on the hinge and proceed inversely respect the points 5.10 ÷ 5.00

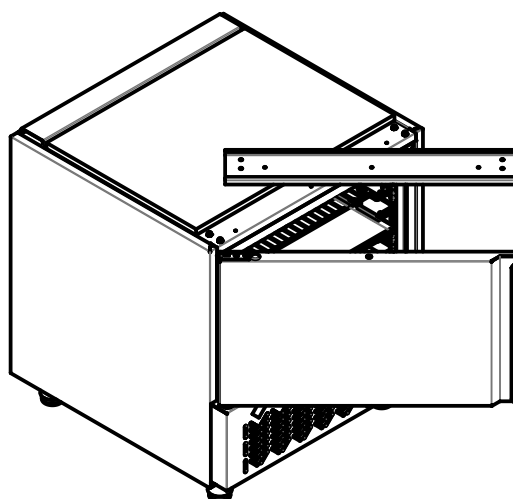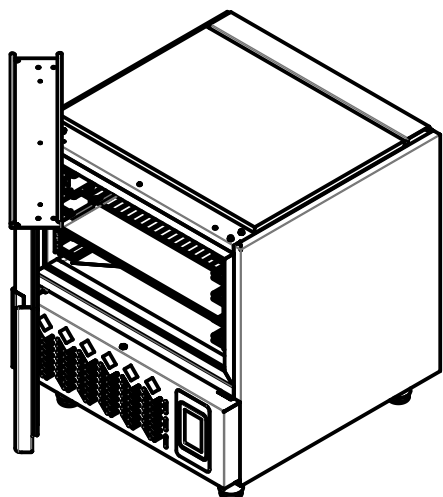

11.00 Reposition the upper surface proceeding in reverse order with respect to the point 3.00

12.00 Fix the Upper surface using the fixing screw (a)

