

04/2013

Mod: DRCS-24

Production code: GRCSCHL24



Diamond
catering equipment

CARVING STATION

Installation & Operating Manual

I&W #07.05.039.00

This manual contains important safety information concerning the maintenance, use and operation of this product. Failure to follow the instructions contained in this manual may result in serious injury. If you are unable to understand the contents of this manual, please bring it to the attention of your supervisor. Do not operate this equipment unless you have read and understood the contents of this manual.

Este manual contiene importante información sobre seguridad concerniente al mantenimiento, uso y operación de este producto. Cualquier falla en el seguimiento de las instrucciones contenidas en este manual puede resultar en un serio daño. Si usted no puede entender el contenido de este manual por favor pregunte a su supervisor. No opere este equipo al menos que haya leído y comprendido el contenido de este manual.

CONTENTS

Important Owner Information	i	Custom Drip Pan.....	4
Introduction	i	Location	4
Important Safety Instructions	1	Operation	5
Model Description	2	Maintenance	6
All Models	2	Cleaning	6
GRCSCL-24 Models.....	2	Display Light Bulb Replacement.....	6
GRCSCLH-24 Models	2	Accessories	7
Specifications	3	Left-Hand Breath Protector & Retrofit Kit.....	7
Electrical Rating Chart.....	3	Custom Drip Pan.....	7
Plug Configurations	3	Cutting Board.....	7
Dimensions.....	3		
Installation	4	Authorized Parts Distributors	Back Cover
General	4		
Breath Protector(s)	4		

IMPORTANT OWNER INFORMATION

Record the model number, serial number (identification plate located on the lower right hand side, front corner of the unit), voltage and purchase date of your Glo-Ray® Carving Station in the spaces below.

Model No. _____

Serial No. _____

Voltage _____

Date of Purchase _____

INTRODUCTION

Glo-Ray Carving Stations are designed as the ideal attachment to extend holding times during serving periods. Glo-Ray warmers have prefocused heat that bathes the entire surface to provide effective heat distribution and eliminate hot spots, keeping all foods at optimum serving temperatures to ensure quality. Ceramic and blanket heating elements are guaranteed against breakage and burnout for one year.

This manual provides the installation and operating instructions for the Glo-Ray Carving Station. We recommend all installation, operating and safety instructions appearing in this manual be read prior to installation or operation of your Hatco foodwarmer. Safety instructions that appear in this manual after a warning symbol  and the words **WARNING** or **CAUTION** printed in bold face are important.

 **WARNING** means there is the possibility of serious injury or death to yourself or others.  **CAUTION** means there is the possibility of minor or moderate injury. **CAUTION** without the symbol signifies the possibility of equipment or property damage only.

Glo-Ray Carving Stations are a product of extensive research and field testing. The materials used were selected for maximum durability, attractive appearance and optimum performance. Every unit is thoroughly inspected and tested prior to shipment.

IMPORTANT SAFETY INSTRUCTIONS

IMPORTANT! Read the following important safety instructions to avoid personal injury or death, and to avoid damage to the equipment or property.

WARNINGS

-  1. Some exterior surfaces on the Carving Station will get hot. Use caution when touching these areas to avoid injury.
-  2. To prevent electric shock, always unplug the Glo-Ray Carving Station before performing cleaning or maintenance.
-  3. Plug warmer into an electrical outlet of the correct voltage, size and NEMA designation. If the plug and outlet do not match, contact a qualified electrician to determine the proper voltage and size and install the proper electrical outlet.
-  4. Only bulbs which meet or exceed N.S.F. standards, specifically designed for food holding areas must be used. Breakage of bulbs not specially coated could result in personal injury and/or food contamination.
-  5. If service is required on this unit, contact your Authorized Hatco Service Agent, or contact the Hatco Service Department at 800-558-0607 or 414-671-6350; fax 800-690-2966 or International fax 414-671-3976.
-  6. This product has no “user” serviceable parts. To avoid damage to the unit or injury to personnel, use only Authorized Hatco Service Agents and Genuine Hatco Parts when service is required.
-  7. Genuine Hatco Replacement Parts are specified to operate safely in the environments in which they are used. Some aftermarket or generic replacement parts do not have the characteristics that will allow them to operate safely in Hatco equipment. It is essential to use Hatco Replacement Parts when repairing Hatco equipment. Failure to use Hatco Replacement Parts may subject operators of the equipment to hazardous electrical voltage, resulting in electrical shock or burn.
-  8. Unit is not waterproof. DO NOT submerge in water. Do not operate if it has been submerged in water.

CAUTIONS

-  1. For safe and proper operation, the Carving Station must be located a reasonable distance from combustible walls and materials. If safe distances are not maintained, discoloration or combustion could occur.

CAUTIONS

1. Do not loosen the adjustment knobs more than ½ turn. Doing so could loosen the internal nut causing it to fall off, thereby making the legs non-adjustable.
2. Use only non-abrasive cleaners. Abrasive cleaners could scratch the finish of your Glo-Ray Carving Station marring its appearance and making it susceptible to soil accumulation.
3. To avoid damage to cutting board do not allow board to be immersed in water or run through a dishwasher. Damage to cutting board is not covered under warranty.
4. Only soft cleaning cloths should be used to clean breath protector(s). Breath protector(s) are made of shatterproof polycarbonate and will scratch if proper care is not taken.

MODEL DESCRIPTION

ALL MODELS

The Glo-Ray Carving Stations have aluminum and stainless steel housings. All models feature incandescent display lights and easy to install breath protector(s) and a pre-attached cord and plug set. Models are available with or without heat in the base.

GRCSCL-24 MODELS

The GRCSCL-24 model is an aluminum foodwarmer with stainless steel base, ceramic heating elements, incandescent lights and a sturdy breath protector on the right side.

GRCSCLH-24 MODELS

The GRCSCLH-24 model is similar to the GRCSCL-24, but features a blanket element base in addition to the ceramic element top heat. Independent controls define the temperature settings for both the top and base heat.

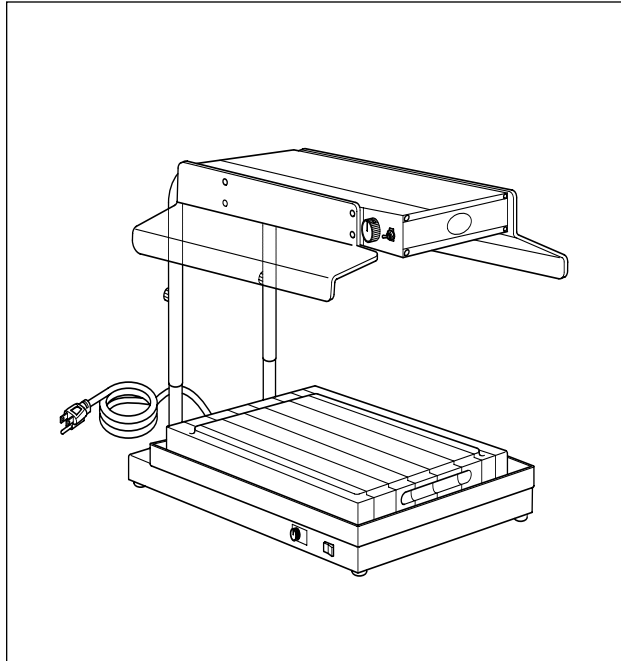


Figure 1. Glo-Ray Carving Station

SPECIFICATIONS

ELECTRICAL RATING CHART

Model	Voltage	Watts	Amps	Plug Configuration	Ship Weight
GRCSCL-24	100	778	7.8	NEMA 5-15P	52 lbs. (24 kg)
	120	990	8.3	NEMA 5-15P	52 lbs. (24 kg)
	220	1040	4.7	CEE 7/7 Schuko	52 lbs. (24 kg)
	240	990	4.1	BS 1363	52 lbs. (24 kg)
	220-230 CE	1041-1137	4.7-5.0	CEE 7/7 Schuko	52 lbs. (24 kg)
	230-240 CE	909-990	4.0-4.1	BS 1363	52 lbs. (24 kg)
GRCSCLH-24	120	1290	10.8	NEMA 5-15P	54 lbs. (24 kg)
	220	1316	6.0	CEE 7/7 Schuko	54 lbs. (24 kg)
	240	1314	5.5	BS 1363	54 lbs. (24 kg)
	220-230 CE	1316-1438	6.0-6.3	CEE 7/7 Schuko	54 lbs. (24 kg)
	230-240 CE	1208-1316	5.3-5.5	BS 1363	54 lbs. (24 kg)

The electrical information in the shaded areas pertains to **Export models only**.

PLUG CONFIGURATIONS

Glo-Ray Carving Stations are supplied from the factory with an electrical cord and plug. See Figure 2.

⚠ WARNING

Plug warmer into an electrical outlet of the correct voltage, size and NEMA designation. If the plug and outlet do not match, contact a qualified electrician to determine the proper voltage and size and install the proper electrical outlet.

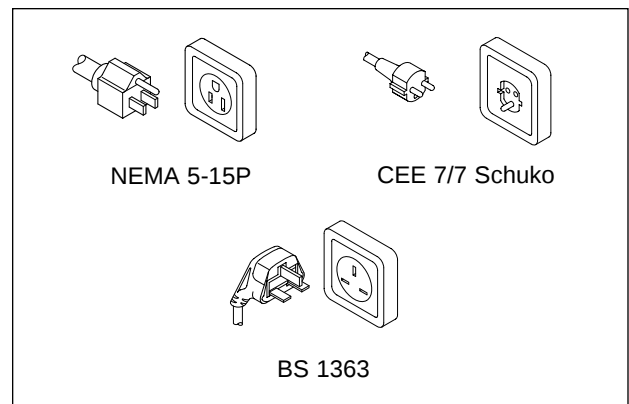


Figure 2. Plug Configurations

SPECIFICATIONS

DIMENSIONS

Model	Width (A)	Depth (B)	Height (C)	Adj. Height* (D)
GRCSCL-24 & GRCSCLH-24	23" (58 cm)	28" (71 cm)	22½"-28½" (57-72 cm)	17½"-23½" (45-60 cm)

*The adjustable clearance between the top of the base to the bottom of the foodwarmer housing is 17½" - 23½" (45-60 cm). See Figure 3.

Height adjustment knobs are located at the back of the legs. Loosen both adjustment knobs ¼ turn counterclockwise. Raise or lower the Glo-Ray housing to the desired height and tighten the adjustment knobs.

CAUTION

Do not loosen the adjustment knobs more than ½ turn. Doing so could loosen the internal nut causing it to fall off, thereby making the legs non-adjustable.

INSTALLATION

GENERAL

The Glo-Ray Carving Stations are shipped with most components installed and ready for operation. The following installation instructions must be performed before plugging in and operating the warmer.

BREATH PROTECTOR(S)

Models GRCSCL-24 and GRCSCLH-24 use polycarbonate breath protector(s) that shield the food while allowing easy access. Specially designed housings and mounting hardware make installation simple.

NOTE: Remove protective paper from polycarbonate surface(s) before mounting breath protector(s).

Align the holes in the breath protector with those in the foodwarmer housing and use the screws, acorn nuts and spacers to mount the breath protector(s) to the housing. See Figure 4.

CUSTOM DRIP PAN

The custom drip pan fits tightly onto the base of the carving station.

LOCATION



CAUTION

For safe and proper operation, the Carving Station must be located a reasonable distance from combustible walls and materials. If safe distances are not maintained, discoloration or combustion could occur.

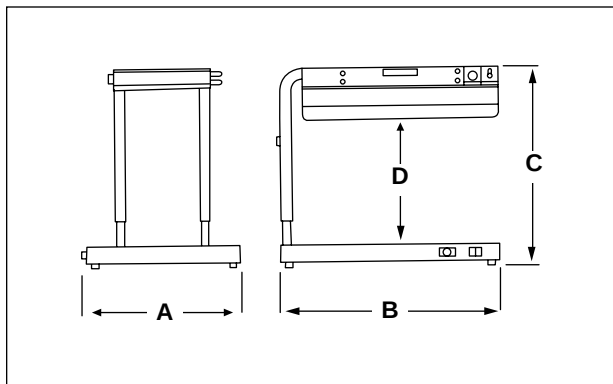


Figure 3. Dimensions

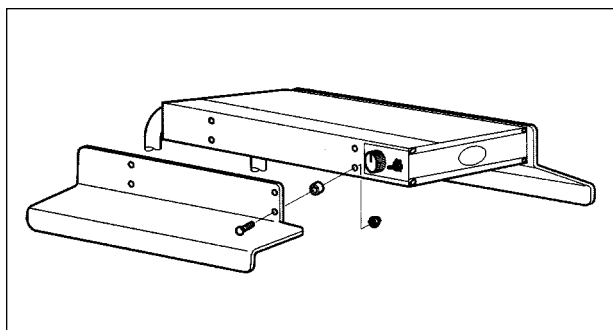


Figure 4. Breath Protector Installation

For proper operation and maximum performance, locate the Carving Station in an area where the ambient air temperature is constant and is a minimum of 70°F (21°C). Areas which are susceptible to active air movements or currents should be avoided, i.e., near exhaust fans or hoods and air conditioning ducts.

The unit should also be located in an area convenient for proper counter height and in accordance with traffic patterns. The Carving Station can sit on top of the Chef System Cook and Hold 5-pan Oven and the Flav-R-Savor Holding Cabinet. For safe and proper operation, place the foodwarmer a reasonable distance from combustible surfaces.

OPERATION

The Carving Station power for the top ceramic heat and the incandescent lights are controlled by the on/off toggle switch. The switch must be in the “ON” position for the unit to function. To control the top heat, set the infinite switch to the desired heating level.

For models with heat in the base, power is independently controlled by the on/off rocker switch. Set base control thermostat to the desired heating level as indicated on the control plate.

 WARNING

Some exterior surfaces on the Carving Station will get hot. Use caution when touching these areas to avoid injury.

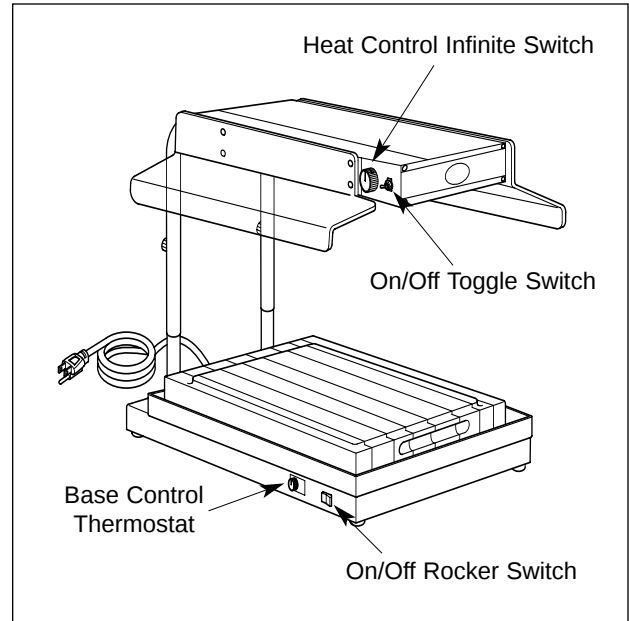


Figure 5. Controls

MAINTENANCE

WARNING

Genuine Hatco Replacement Parts are specified to operate safely in the environments in which they are used. Some aftermarket or generic replacement parts do not have the characteristics that will allow them to operate safely in Hatco equipment. It is essential to use Hatco Replacement Parts when repairing Hatco equipment. Failure to use Hatco Replacement Parts may subject operators of the equipment to hazardous electrical voltage, resulting in electrical shock or burn.



WARNING

This product has no “user” serviceable parts. To avoid damage to the unit or injury to personnel, use only Authorized Hatco Service Agents and Genuine Hatco Parts when service is required.

CLEANING

The Hatco Glo-Ray Carving Stations are designed for maximum durability and performance, with minimum maintenance.

WARNING

To prevent electric shock, always unplug the Glo-Ray Carving Station before performing any cleaning or maintenance.

To preserve the bright finish of the Carving Station, it is recommended that the surfaces be wiped daily with a damp cloth. Stubborn stains may be removed with a stainless steel cleaner or a non-abrasive cleanser.

CAUTION

Use only non-abrasive cleaners. Abrasive cleaners could scratch the finish of your Glo-Ray Carving Station marring its appearance and making it susceptible to soil accumulation.

CAUTION

Unit is not waterproof. DO NOT submerge in water. Do not operate if it has been submerged in water.

Drip pans should be removed from the foodwarmer for washing and sanitizing after each use.

To maintain your cutting board, clean with mild detergent and rinse. Apply a coating of mineral oil to all surfaces, allowing oil to penetrate for a short period. Wipe off any excess oil from surface.

CAUTION

To avoid damage to cutting board do not allow board to be immersed in water or run through a dishwasher. Damage to cutting board is not covered under warranty.

Breath protector(s) may be removed for thorough cleaning and polishing. They should be wiped daily with a soft, damp cloth. If fine scratches are present, a good polycarbonate cleaner may be used to polish the breath protector(s) and remove any scratches.

CAUTION

Only soft cleaning cloths should be used to clean breath protector(s). Breath protector(s) are made of shatterproof polycarbonate and will scratch if proper care is not taken.

DISPLAY LIGHT BULB REPLACEMENT

The display light is an incandescent bulb which illuminates the warming area. This bulb has a special coating to guard against injury and food contamination in the event of breakage.

To replace a bulb, disconnect the power supply and wait until the unit has cooled. Display lamps have a threaded base. Unscrew the bulb from the unit and replace it with a new specially coated incandescent bulb. Hatco shatter-resistant bulbs meet N.S.F. standards for food holding and display areas.

NOTE: Hatco shatter-resistant light bulbs meet N.S.F. standards for food holding and display areas. For 100 & 120 Volt applications, use Hatco part #02.30.043.00. For 220 & 240 Volt applications, use Hatco part #02.30.058.00.

WARNING

Only bulbs which meet or exceed N.S.F. standards, specifically designed for food holding areas must be used. Breakage of bulbs not specially coated could result in personal injury and/or food contamination.

LEFT-HAND BREATH PROTECTOR & RETROFIT KIT

A left-hand breath protector is available for the chef's side of the Carving Station. Follow the installation instructions for breath protector(s) found in the *INSTALLATION* section. This shield is available for retrofit. The retrofit kit includes the left-hand breath protector and installation hardware.

CUSTOM DRIP PAN

A 1" (3 cm) deep custom drip pan is available to tightly fit on top of the carving station base. This stainless steel pan is 20" x 26¾" (51 x 68 cm).

CUTTING BOARD

An N.S.F. approved wood cutting board 18" x 24" x 1¾" (46 x 61 x 4 cm) is available for use inside the drip pan.

[illegible]