

02/2010

Mod:DSH-6

Production code:FSHC6W1



Diamond
catering equipment

The Hatco Flav-R-Savor Portable Holding Cabinet is capable of holding all types of hot foods at optimum serving temperatures. Thermostatically-controlled *heat* and *humidity* allows you to prepare food in advance of peak periods and hold it for hours.

FLEXIBILITY

This easy to maneuver Portable Holding Cabinet is made of stainless steel and painted silver-gray top, sides, and back. It features a digital temperature readout and a large tempered glass or insulated stainless steel door. Convenient tray slides hold food pans on 3" (76 mm) centers or 1½" (38 mm) centers, and can be removed easily for cleaning.

The Flav-R-Savor Portable Holding Cabinet is perfect for serving counters, buffet lines, drive-up windows, point-of-service or preparation areas. FSHC-6W1 and -6W2 units are small enough to fit under normal kitchen counters when ordered with low profile casters.

Portable Holding Cabinets can be stacked one on top of the other providing two separate humidified temperature zones. Ideal for schools, hospitals, concessions, and cafeterias where backup food storage is needed.

The Glo-Ray® Carving Station is available to be placed on top of the Flav-R-Savor Portable Holding Cabinet to create a complete serving station for buffet lines.

QUALITY

The following features assure the finest performance for years to come:

- Thermostatically-controlled heat and humidity holds hot food at optimum serving temperatures longer.
- Allows preparation of food in advance of peak serving periods.
- Electrical components, controls, and water reservoir are located at the top for easy access.
- Adjustable humidity and temperature controls, digital temperature readout, insulated side walls, field reversible glass doors, large swivel casters with wheel locks, and 6' (1829 mm) recessed cord and plug are standard.



Model FSHC-7-1 with standard 4" (102 mm) casters and accessory food pans




Model FSHC-6W1 with optional *Designer* Color on side and top, and accessory food pans




FSHC-7-1/FSHC-7-1 stacked with accessory hardware and food pans

FLAV-R-SAVOR® PORTABLE HOLDING CABINETS

Models FSHC-6W1, FSHC-6W2 FSHC-7-1, FSHC-7-2

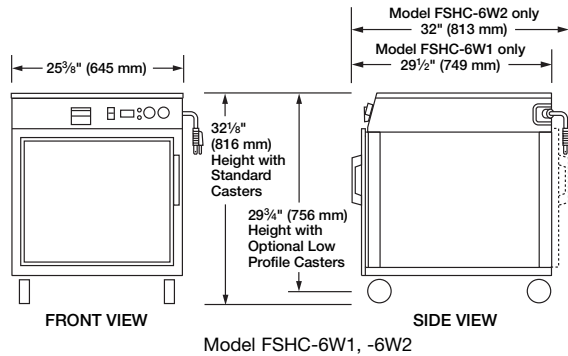

Model FSHC-6W1, -6W2

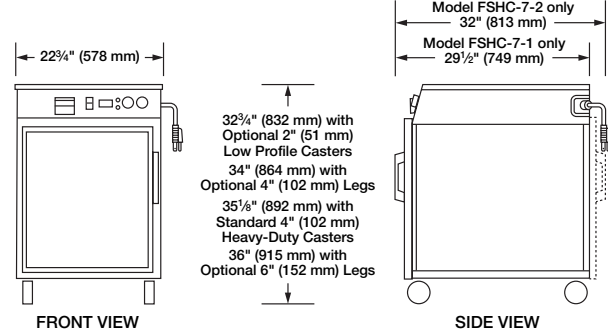

Model FSHC-7-1, -7-2

SPECIFICATIONS

Model	Type	Rack Style	Shipping Weight
FSHC-6W1	1 Door	Adjustable Angle Slides*	175 lbs. (79 kg)
FSHC-6W2†	2 Door	Adjustable Angle Slides*	179 lbs. (81 kg)
FSHC-7-1	1 Door	Adjustable Angle Slides*	168 lbs. (76 kg)
FSHC-7-2†	2 Door	Adjustable Angle Slides*	172 lbs. (78 kg)

* 7 slides on each side. Sheet Pans not included.

† Two-door pass-through single cabinet, **not** two units stacked.

* 6 slides on each side. Sheet Pans not included.

WATER QUALITY REQUIREMENTS


Water supply in excess of 3.0 grains of hardness per gallon (GPG) (.75 grains of hardness per liter) must be treated and softened before being used. Water containing over 3.0 GPG (.75 GPL) will decrease the efficiency and reduce the operating life of the unit.

Note: Product failure caused by liming or sediment buildup is not covered under warranty.

Pan Capacity

Models FSHC-6W1 and -6W2 include six stainless steel angle slides which will accommodate six 18" x 26" (457 x 660 mm) sheet pans on 3" (76 mm) centers; eleven 18" x 26" (457 x 660 mm) sheet pans on 1 1/2" (38 mm) centers, or twelve 12" x 20" (305 x 508 mm) food pans (six 2/1 Gastronorm pans) on 3" (76 mm) centers, or eleven 2/1 Gastronorm pans on 1 1/2" (38 mm) centers) with the purchase of additional pan slides.

Models FSHC-7-1 and -7-2 include seven stainless steel angle slides which will accommodate seven 12" x 20" (305 x 508 mm) food pans or 18" x 26" (457 x 660 mm) sheet pans on 3" (76 mm) centers, or fifteen 18" x 26" (457 x 660 mm) sheet pans on 1 1/2" (38 mm) centers with purchase of extra angle slides.



DIMENSIONS

FSHC-6W1: 25 3/8"W x 29 1/2"D x 32 1/8"H (645 x 749 x 816 mm).

FSHC-6W2: 25 3/8"W x 32"D x 32 1/8"H (645 x 813 x 816 mm).

FSHC-7-1: 22 3/4"W x 29 1/2"D x 35 1/8"H (578 x 749 x 892 mm) on 4" (102 mm) Casters.

FSHC-7-2: 22 3/4"W x 32"D x 35 1/8"H (578 x 813 x 892 mm) on 4" (102 mm) Casters.

Cabinet Opening: FSHC-6W1, -6W2 – 21 1/2"W x 19"H (546 x 483 mm).

FSHC-7-1, -7-2 – 18 1/2"W x 22"H (470 x 559 mm).

Top Surface: FSHC-6W1, -6W2 – 25 3/8"W x 25 7/8"D (645 x 657 mm).

FSHC-7-1, -7-2 – 22 5/8"W x 25 7/8"D (575 x 657 mm).

VOLTAGE

FSHC-7-1, -7-2: 120 volts, 60 Hz, 1697 watts, 14.1 amps (uses NEMA 5-15P, NEMA 5-20P – Canada).

FSHC-6W1, -6W2: 120 volts, 60 Hz, 1697 watts, 14.1 amps (uses NEMA 5-15P, NEMA 5-20P – Canada).

Export voltages available.

CORD LOCATION

FSHC-7-1, -7-2: Facing controls, left-hand side panel, bottom right corner.

FSHC-6W1, -6W2: Back of unit, top right side.

PLUG CONFIGURATIONS

NEMA 5-15P	NEMA 5-20P	CEE 7/7 Schuko	BS-1363

OPTIONS (NOT FOR RETROFIT)

- ☐ Designer Colors (Side Panels and Top): Warm Red, Black, Gray Granite, White Granite, Navy Blue, Hunter Green
- ☐ Stainless Steel Side Panels, Back, and Top (No back panel on two-door models)
- ☐ Stainless Steel Door (In lieu of Glass Door)
- ☐ 2" (51 mm) Low Profile Casters (In lieu of standard Casters) (FSHC-6W1, -6W2 only)
- ☐ 4" (102 mm) Adjustable Legs (In lieu of standard Casters) (FSHC-7-1, -7-2 only)

- ☐ 6" (152 mm) Stainless Steel Legs (In lieu of standard Casters) (FSHC-7-1, -7-2 only)
- ☐ Audible Low-Water Alarm (FSHC-7-1, -2 only)

ACCESSORIES

- ☐ Stacking Hardware
- ☐ Bumper Kit
- ☐ Extra Pan Slides
- ☐ Wire Shelf (FSHC-7-1, -7-2 only)
- ☐ Sheet Pans – Full and Half-size
- ☐ Glo-Ray® Carving Station

PRODUCT SPECS

Portable Holding Cabinet

The humidity-controlled heated Portable Holding Cabinet shall be a Flav-R-Savor® Model, rated atvolts, andwatts, as manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

With 24/7 service (U.S. and Canada only), the cabinet shall havedoor(s), tray slides (or holding rack), insulated side walls, 4" (102 mm) swivel casters with wheel locks or 4" (102 mm) legs,

and a 6' (1829 mm) cord and plug. It shall include a water reservoir, humidity selector switch, temperature selector dial, on-off switch, and indicating lights.

Accessories shall include Glo-Ray® Carving Station, sheet pans, stacking hardware for multiple cabinets, bumper kit, and wire shelf.