

05/2018

Mod: TAVX/4-R2

Production code: FGB 451/267 APO



Diamond
catering equipment

Frigobares Com Grupo | 4 Portas Opacas Skinplate | Inox



Características Técnicas

FGB PO | FGB APO



- Dimensões Interiores
FGB 440/229 | W1960 x D460 x H737mm
FGB 451/267 | W2340 x D460 x H737mm
- Interior Chapa Plastificada (Sk Branco) | Inox AISI 304
- Exterior Chapa Plastificada (Sk Preto) | Inox AISI 430
- Isolamento Poliuretano Base Água
- Frio Ventilado
- Iluminação LED
- Termostato Digital
- Descongelação Automática
- 2 Prateleiras Amovíveis Aço Plastificado por Porta
- Capacidade para 3 Garrafas em Altura
- Pé Regulável
- Zona do Motor Extraível, para fácil Manutenção ou Serviço Técnico

Technical Features


FGB PO | FGB APO

- Internal Dimention
FGB 440/229 | W1960 x D460 x H737mm
FGB 451/267 | W2340 x D460 x H737mm
- Inside Surface (White Skinplate) | Inox AISI 304
- Outside Surface (Black Skinplate) | Inox AISI 430
- Polyurethane Water Base Insulation
- Ventilated Cold
- LED Lighting
- Digital Thermostat
- Automatic Defrost
- 2 Removable Shelves in Plastified Steel for Door
- Capacity for 3 Bottles 33cl in High
- Adjustable Feet
- Extractable Motor Area for Easy Maintenance or Techical Service

Modelo Model	Largura Width	Profundidade Depth	Altura Height	Volume Volume	Peso Weight	Potência Power	Consumo Consumption	Portas Doors	Gás Gas
FGB 440/229 PO	2295mm	565mm	890/905mm	664 521	116 153	400W	2023 kwh/ano kwh/year	4 PO	R 290
FGB 451/267 PO	2675mm	565mm	890/905mm	793 622	130 180	420W	2120 kwh/ano kwh/year	4 PO	R 290
FGB 440/229 APO	2295mm	565mm	890/905mm	664 521	116 153	400W	2023 kwh/ano kwh/year	4 PO	R 290
FGB 451/267 APO	2675mm	565mm	890/905mm	793 622	130 180	420W	2120 kwh/ano kwh/year	4 PO	R 290

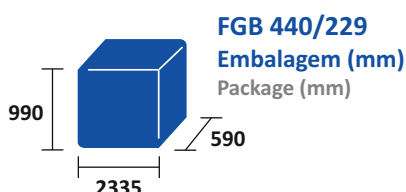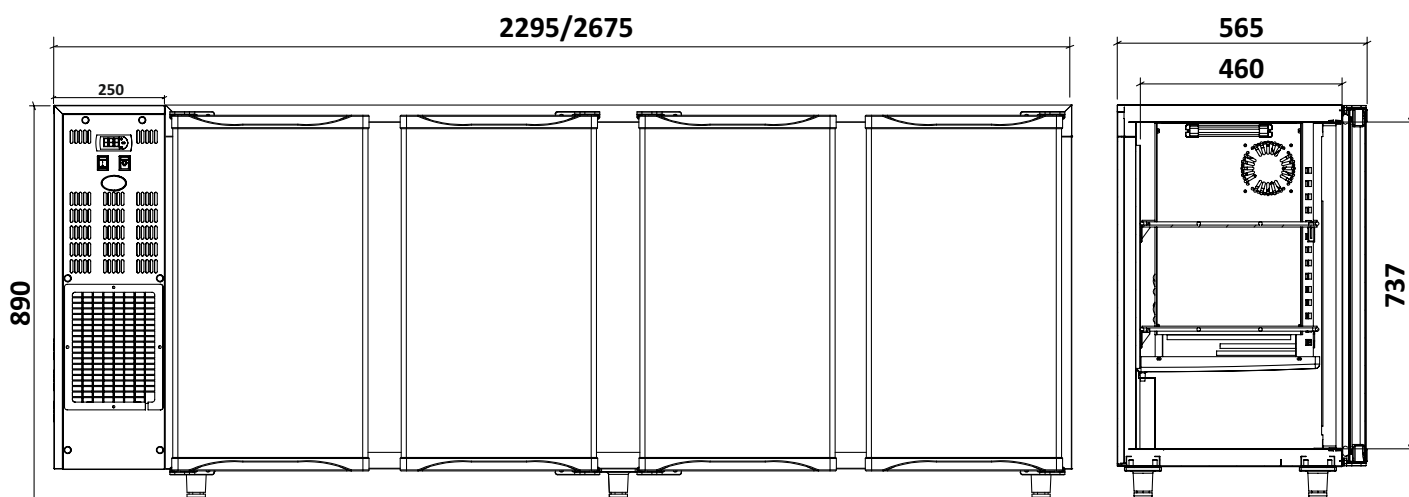

Capacidade Carga (unid)	TIR	20"	40"
Load capacity (unit)	46	12	30

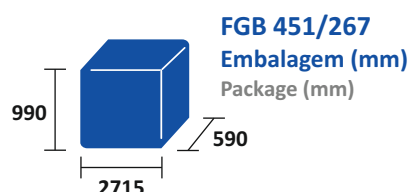

Capacidade Carga (unid)	TIR	20"	40"
Load capacity (unit)	40	12	24

Frigobares Com Grupo | 4 Portas Opacas

Skinplate | Inox

Capacidade Garrafas (33cl)
Bottles Capacity (33cl)
Capacidade Latas (33cl)
Cans Capacity (33cl)



FGB 440	FGB 451
504 - 616	567 - 704
864 - 1056	1056 - 1152

 +1°C
+8°C
Temperatura
Funcionamento
Temperature Range



FGB 440/229 PO
FGB 451/267 PO



FGB 440/229 APO
FGB 451/267 APO



Modelo Model	Classe Climática Climate Class	Classe Energética Energy Class
FGB 440/229 PO	4	D
FGB 451/267 PO	4	D
FGB 440/229 APO	4	D
FGB 451/267 APO	4	D