

05/2018

Mod: TAVX/4G-R2

Production code: FGB 451/267 APV



Diamond
catering equipment

Frigobares Com Grupo | 4 Portas Vidro

Skinplate | Inox



Características Técnicas

FGB PV | FGB APV


- Dimensões Interiores
FGB 440/229 | W1960 x D460 x H737mm
FGB 451/267 | W2340 x D460 x H737mm
- Interior Chapa Plastificada (Sk Branco) | Inox AISI 304
- Exterior Chapa Plastificada (Sk Preto) | Inox AISI 430
- Isolamento Poliuretano Base Água
- Frio Ventilado
- Iluminação LED
- Termostato Digital
- Descongelação Automática
- 2 Prateleiras Amovíveis Aço Plastificado por Porta
- Capacidade para 3 Garrafas 33cl em Altura
- Pé Regulável
- Zona do Motor Extraível, para fácil Manutenção ou Serviço Técnico

Technical Features

FGB PV | FGB APV

- Internal Dimention
FGB 440/229 | W1960 x D460 x H737mm
FGB 451/267 | W2340 x D460 x H737mm
- Inside Surface (White Skinplate) | Inox AISI 304
- Outside Surface (Black Skinplate) | Inox AISI 430
- Polyurethane Water Base Insulation
- Ventilated Cold
- LED Lighting
- Digital Thermostat
- Automatic Defrost
- 2 Removable Shelves in Plastified Steel for Door
- Capacity for 3 Bottles 33cl in High
- Adjustable Feet
- Extractable Motor Area for Easy Maintenance or Techical Service

Modelo Model	Largura Width	Profundidade Depth	Altura Height	Volume Volume	Peso Weight	Potência Power	Consumo Consumption	Portas Doors	Gás Gas
FGB 440/229 PV	2295mm	565mm	890/905mm	664 521	136 173	410W	2074 kwh/ano kwh/year	4 PV	R 290
FGB 451/267 PV	2675mm	565mm	890/905mm	793 622	166 209	430W	2171 kwh/ano kwh/year	4 PV	R 290
FGB 440/229 APV	2295mm	565mm	890/905mm	664 521	136 173	410W	2074 kwh/ano kwh/year	4 PV	R 290
FGB 451/267 APV	2675mm	565mm	890/905mm	793 622	166 209	430W	2171 kwh/ano kwh/year	4 PV	R 290

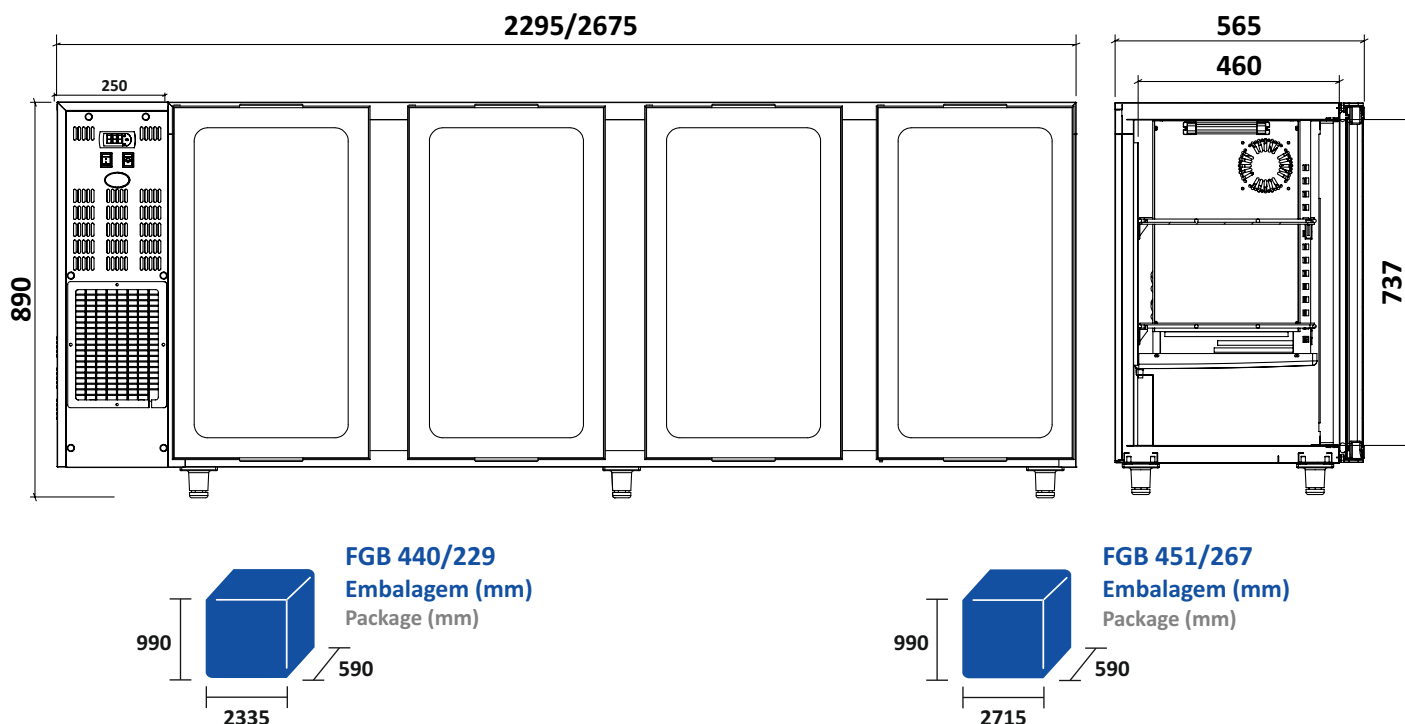

Capacidade Carga (unid)	TIR	20"	40"
Load capacity (unit)	46	12	30

Capacidade Carga (unid)	TIR	20"	40"
Load capacity (unit)	40	12	24

Frigobares Com Grupo | 4 Portas Vidro

Skinplate | Inox

Capacidade Garrafas (33cl)
Bottles Capacity (33cl)
Capacidade Latas (33cl)
Cans Capacity (33cl)



FGB 440	FGB 451
504 - 616	567 - 704
864 - 1056	1056 - 1152

+1°C
+8°C
Temperatura
Funcionamento
Temperature Range



FGB 440/229 PV
FGB 451/267 PV



FGB 440/229 APV
FGB 451/267 APV



Modelo Model	Classe Climática Climate Class	Classe Energética Energy Class
FGB 440/229 PV	4	N.A.
FGB 451/267 PV	4	N.A.
FGB 440/229 APV	4	N.A.
FGB 451/267 APV	4	N.A.