


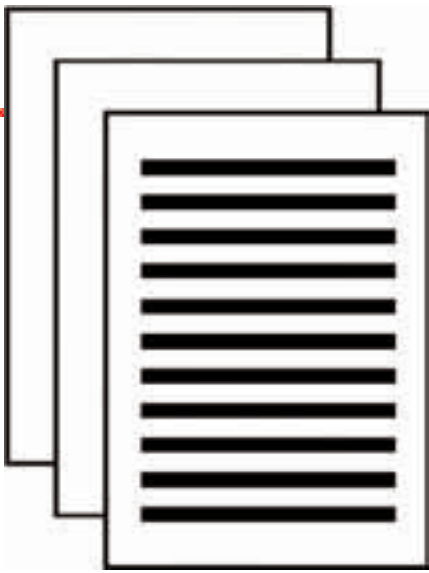

Mod: ACID-CHROME

Production code: E1001-CH

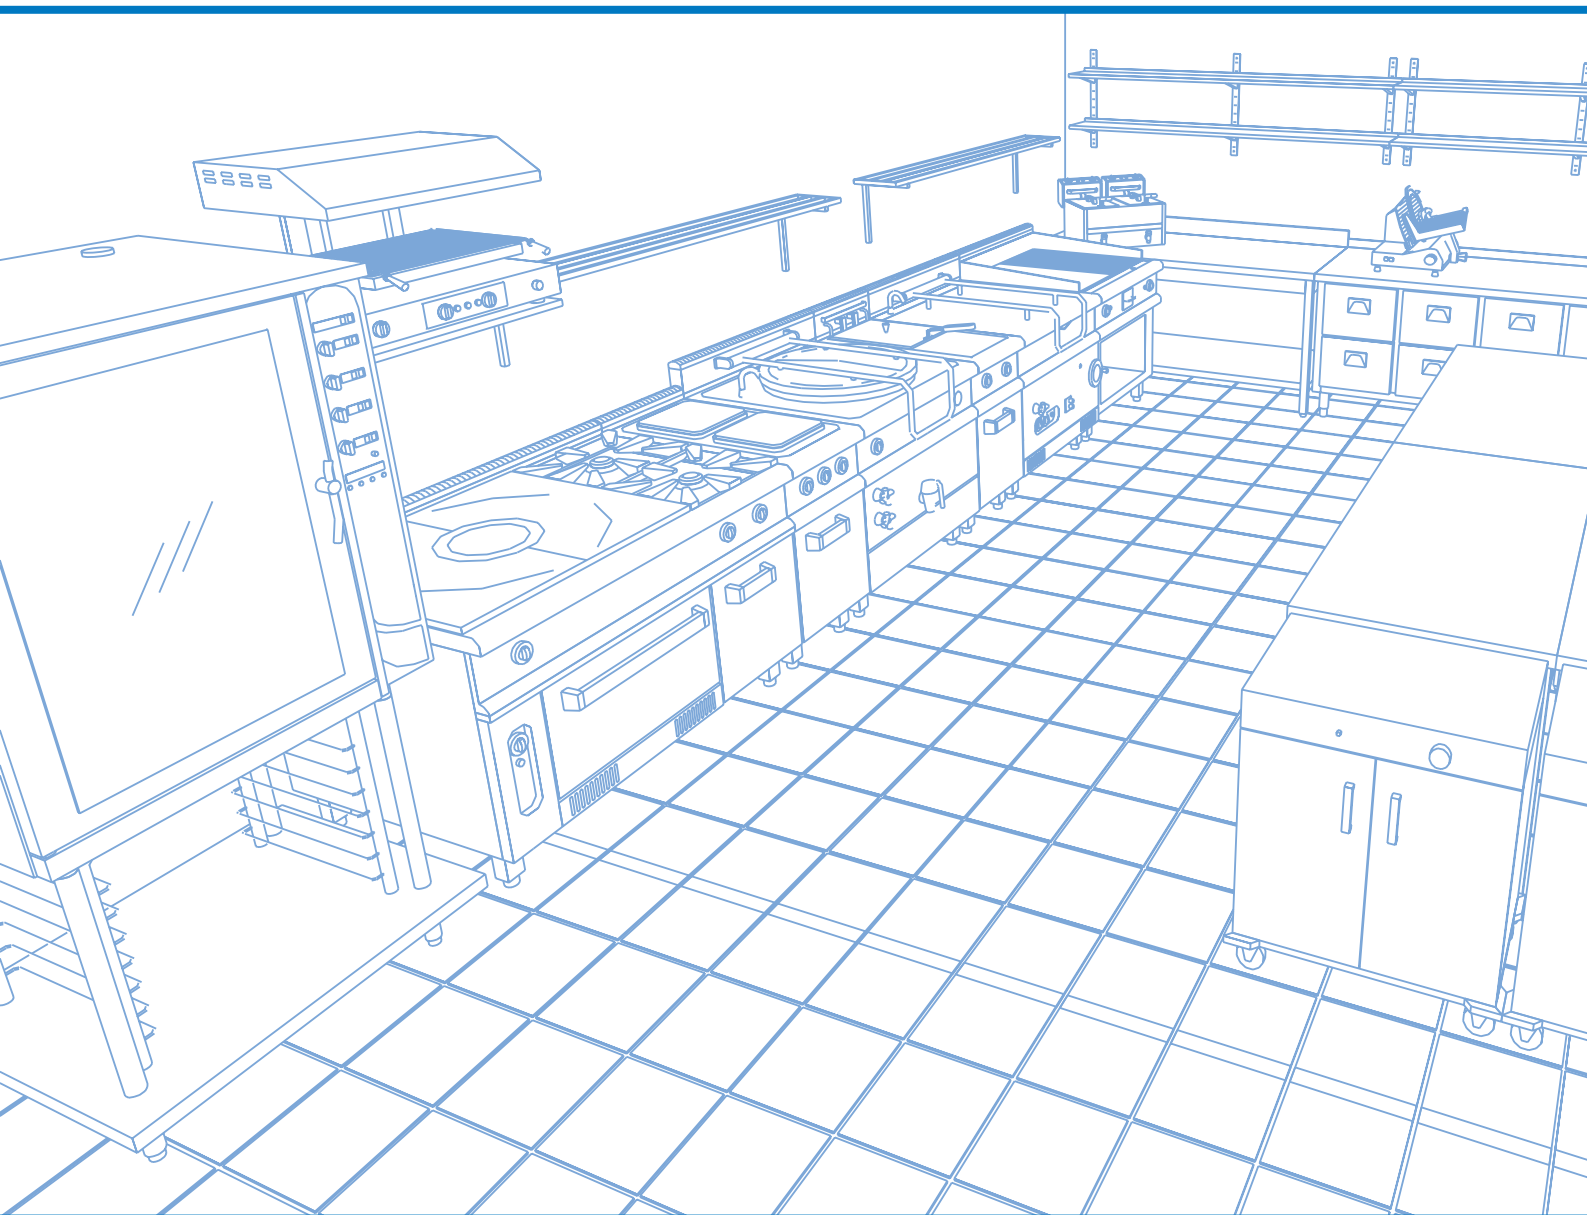


Table of Contents

1

Manufacturer and Product Identification	pp. 1-2
For Your Safety	p. 2
Description and Technical Specifications	p. 3
Identification of External Components	p. 3
Unpacking	p. 4
Locating the Squeezer	pp. 4-5
Electrical Wiring	p. 5
Preparing the Squeezer for Use	p. 5
Usage Precautions	p. 6
Maximum Operating Time	p. 6
Cleaning Precautions	p. 6
Clearing Operations	p. 7
Maintenance Operations	p. 8
Troubleshooting	p. 8
Shutdown for Storage or Dispose	p. 8
Usage Precautions	p. 8
Safety Precautions	p. 9
Motor Thermal Protector	p. 9
Warranty	p. 9
Separate Parts Diagram	p. 10
EC Compliance Declaration	p. 11

When a number appears depicted in the text like: [9], it refers to one of the squeezer parts that are detailed in section 8 (identification of components).

01

CUNILL Citrus Fruit Squeezers

User's Manual Use, Maintenance and Safety Instructions

This User's Manual has been written according to European Community regulations (CE 210/2, 5), and Appendix to the Directive on Machinery of the Official Journal of the European Economic Community.

CUNILL SUCS, manufacturer of **CUNILL** citrus fruit squeezers, reserves the right to change the specifications detailed in this manual without prior notice, with the sole intention of evolving and constantly improving its products.

02

Manufacturer Identification

Manufacturer: **CUNILL SUCS, S.L.**

Brand Name: **CUNILL**

Country Manufacturer: **SPAIN**

Postal Address:

Carrereta de Santa Coloma, s/n

Apartado de Correos nº 18

17410 SILS - MALLODORQUINES (GIRONA)

SPAIN

Telephone (national): (972) 16.82.82

Fax (national): (972) 85.31.04

Telephone (international): 34-72-16.82.82

Fax (international): 34-72-85.31.04

Internet: <http://www.cunill.com>



03

Identification of Models

The use and maintenance instructions detailed in this manual refer to all CUNILL brand squeezer models in our current product range, commercially known as **ACID ONE (ACID 1)** and **ACID TWO (ACID 2)**.

These squeezers are manufactured with various exterior finishes (**ACID 1 "STANDARD" in orange, ACID 1 "CHROME" in chrome, ACID 1 "GOLD" in gold, etc.**) which modify the features of the models **ONLY IN OUTER FINISH**. Therefore, the use, service and maintenance instructions are **THE SAME FOR ALL MODELS**.

04

Welcome to the World of CUNILL

We would like to thank you for choosing **CUNILL** citrus fruit squeezers manufactured by **CUNILL SUCS**.

The squeezer you have purchased is made following strict quality controls, and has been designed applying advanced ergonomic principles so that you have no difficulty whatsoever in using and operating it, and so that it may provide **comfortable, safe operation**.

In this manual you will find all the information you need to install, use, maintain and clean the squeezer. Follow all of these instructions carefully to ensure a long, trouble-free life for your squeezer.

If you experience any problems or have any doubts regarding the contents of this manual, please don't hesitate to contact our technical service, which is at your entire service as of this very moment.

05

For Your Safety and Proper Operation of the Squeezer

CUNILL squeezers are designed to offer safe, long-lasting and reliable service if used correctly. Therefore, it is **VERY IMPORTANT** to read this instruction manual carefully before using the squeezer for the first time, following each section in the proper order and paying special attention to the warnings regarding installation, use, maintenance and cleaning (especially those sections marked with the symbol: (!) because they refer to operations which may cause **HAZARD TO THE USER** or may **DAMAGE THE SQUEEZER** if not performed correctly).



It is necessary to advise that, as with any other electrical apparatus, improper handling may cause personal injury or material damage.

The manufacturer cannot be held responsible for any transformation, regulation, alteration and/or modification of the squeezer by unauthorized personnel which may cause material damages or personal injury.

Although the manual which you are reading is written in the language of your country, the same manual is available in all of the official languages of the European Community. If you wish to obtain one of these, or a translation into any other language, please contact our Commercial Department, which will gladly provide you with a version in the language of your choice. (Our address and telephone are indicated in this manual.)


Store this manual carefully for future reference.

06 General Description

All of the machines presented in this manual are electrically powered citrus-fruit squeezers for commercial use.



08 Identification of components

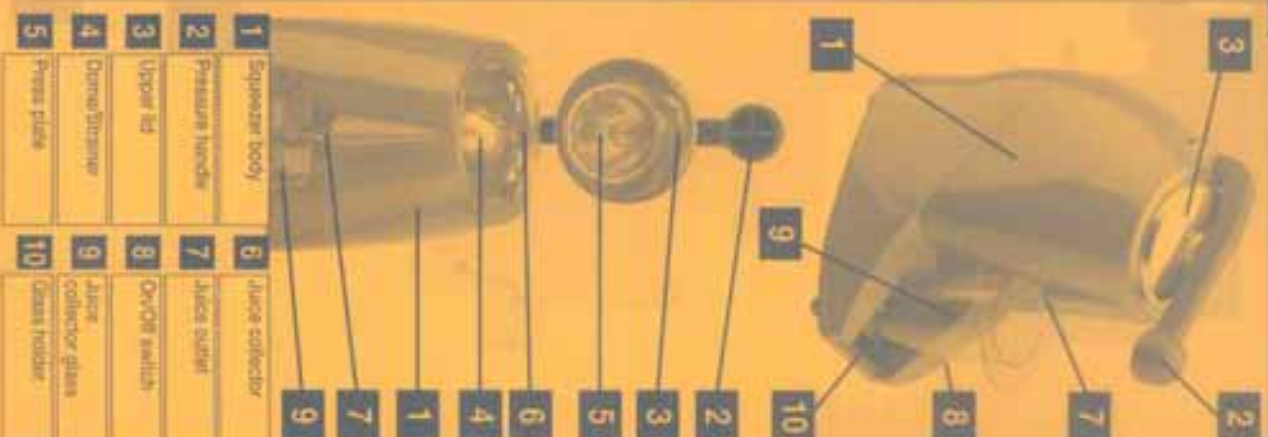

1	Squeezer body	6	Juice collector
2	Pressure handle	7	Juice output
3	Upper lid	8	On/Off switch
4	Donut/Strainer	9	Juice collector glass
5	Press plate	10	Glass holder

09 Unpacking

Before unpacking the squeezer, make sure that the model and colour indications on the box match those that you have selected. If not, contact your dealer.



Carefully remove the wrapping and make sure that the squeezer has not been damaged during transport. If there is any damage, inform your distributor at once. If you suspect that the squeezer or any of its parts may be deteriorated or damaged, **DO NOT USE THE MACHINE**. Contact CUNILL technical service or CUNILL SUCS authorised qualified service personnel immediately.

Before using the machine, remove all packaging and wrappers and make sure that it is clean.

To prevent possible accidents, be especially careful to keep plastic bags and metal staples from the packing materials away from the reach of children.



Please be respectful of the environment and dispose of the packing materials properly. They can be recycled; both the plastic bag used to wrap the squeezer and the cardboard box that it comes in are made of recyclable materials. Find out about the applicable legislation in your country.

10 Locating the Squeezer

The location of the squeezer (as with any other machine) is decisive for the proper operation of the machine as well as for the user's health. Improper placement of the machine may have physiological effects, due for instance to improper posture or unnecessary extra physical effort.

For this reason, keep in mind the following precautions before deciding the site for your squeezer:

- Place it on a flat, stable surface at a height from the ground that will let you operate it safely and comfortably.
- Place it at sufficient distance from a properly grounded main outlet enabling you to plug and unplug the power cord effortlessly (approx. 110 cm).

Never pull the CORD when unplugging; always grasp the PLUG itself.

q) Maintain the following minimum clearances to ensure perfect operation of the squeezer, as well as for easy and safe use and cleaning:



WIDTH CLEARANCE: Keep a minimum free clearance of 30 cm on both sides of the machine.

DEPTH CLEARANCE: Keep a minimum free clearance of 20 cm from the front and back of the machine.

HEIGHT CLEARANCE: Keep a minimum free clearance of 50 cm on top of the machine.



07 Technical Specifications

ACID1 Model		acid 1 ONE	
Weight	2000 mm	2000 mm	2000 mm
Height	1300 mm	1300 mm	1300 mm
Electrical specifications			
Voltage	220 V	220 V	220 V
Frequency	50 Hz	50 Hz	50 Hz
Power	2.5 kW	2.5 kW	2.5 kW
Current	11.4 A	11.4 A	11.4 A
Power cord	1.5 m	1.5 m	1.5 m
Power plug	CEE 16A	CEE 16A	CEE 16A

d) Place the squeezer in a site where it cannot be affected by a direct stream of water and where foreign objects cannot penetrate the interior of the machine.

e) Keep the squeezer away from heat sources such as a radiator or fan duct, and keep away from direct sunlight, excessive dust, rain, mechanical vibrations or impacts.

f) To avoid internal overheating, place the squeezer in a properly ventilated site.

11 Electrical Wiring

The squeezer's electrical connections and wiring must be made by qualified personnel, always following these safety indications:

a) Make sure the electrical data on the nameplate (see section 23 of this manual) match the mains power.

b) The squeezer must be connected to a grounded mains outlet, meeting your country's safety requirements. The non-fulfilment of this requirement constitutes a serious hazard to your health. The manufacturer cannot be held responsible in the event of injuries or damages caused by a lack of proper grounding of the facility.



c) The electrical system of the site where the squeezer is installed should be protected with a magnetothermal switch suited to the power absorbed by the squeezer as indicated on the nameplate (see section 23 of this manual).

d) A differential relay suited to the facility's characteristics must be supplied.

e) Make sure that the section of the facility's wiring is appropriate for the intensity consumed by the machine.

f) Do not use extension cords, adapters or multiple plugs when connecting the squeezer to the mains.

The manufacturer cannot be held responsible for injuries or harm to the health of persons and/or animals, or for material damages, arising from the incorrect installation of the squeezer or nonfulfilment of any of the above indications.

12 Preparing the Squeezer for Use

To prepare the squeezer for use, follow these step-by-step instructions:

a) Plug the squeezer to the mains outlet.

b) Place the juice collector glass [9] on the glass holder [10]. (Note that this part has a notch for placing the glass correctly.)

c) Switch on the squeezer using the On/Off switch [8]. The squeezer is now ready to use, although the motor is not yet spinning.



d) Raise the pressure handle [2].

e) Place half an orange or lemon on top of the dome/strainer [4] and press down slightly.

f) Lower the pressure handle [2] onto the orange or lemon half. When the fruit is pressed down, the motor starts automatically and the juice slowly falls into the juice collector glass [9].



g) Raise the pressure handle [2]. The motor stops automatically.

IMPORTANT: Press the fruit down SLOWLY all the way. This makes for correct centrifugation of the pulp (which is collected inside the dome/strainer [4]) and yields the maximum amount of juice.

13 Usage Precautions

Never PRESS DOWN on the handle ABRUPTLY; this will only break the fruit and produce a lot of pulp.

Never LIFT the handle ABRUPTLY. Wait a moment until the pulp filter stops spinning. Otherwise, the fruit will splash out and spatter you.

14 Maximum Operating Time

The squeezer **SHOULD NOT BE OPERATED CONTINUOUSLY FOR MORE THAN THIRTY MINUTES.**

If you observe any abnormal operation, switch off the machine, disconnect it immediately from the mains outlet and call the CUMILL technical service or your dealer.



15 Cleaning Precautions

It is important to clean the different parts of the squeezer at the end of the day.

To avoid any incidents, the cleaning operation should be performed observing the following **SAFETY GUIDELINES:**

a) Before proceeding to clean any part of the machine (including the external housing), make sure to turn it off using the On/Off switch [8] and disconnect the plug from the mains outlet.

b) Never clean the body of the squeezer by splashing water on it or submerging it in water.

c) Never use abrasive cleaning products or chemical solvents to clean the machine. Use a soft cloth dampened in water.

d) Cleaning of the squeezer by the user should be limited to the external housing and the movable parts used to obtain juice. Cleaning of the squeezer's interior (motor) must be left **ONLY TO CUMILL TECHNICAL SERVICE PERSONNEL.**



16 Cleaning the Squeezer

To ensure optimum operation of the squeezer, clear the pulp and clean the dome/strainer [4] and juice collector [6] after every ten half-fruits squeezed. This ensures the collection of almost pulp-free juice.

VERY IMPORTANT: Although the squeezer's design makes it practically impossible for juice to drip in its interior (the electric motor is housed in a casing to prevent this possibility), before cleaning the machine it is advisable to **make sure that all the elements (pressure handle [2], upper lid [3], press plate [5], dome/strainer [4], juice collector [6]) are completely dry.**

Only clean the dome/strainer [4] and juice collector [6] by removing them carefully from their casing (they are not attached or held by any mechanism) and rinse them under the tap or using a

notches on the back of the dome/strainer [4] and the shaft are aligned.



To clean the upper lid [3] and press plate [5], unscrew them from the pressure handle [2] turning carefully in a counter-clockwise direction.



Cleaning of these components can be left until the end of each working day; in the meantime, spot cleaning can be done using a damp cloth without disassembling the parts. Be very careful when screwing on the press plate [5] to avoid altering the threaded section of the pressure handle [2].

Be very careful when screwing on the press plate [5] to avoid altering the threaded section of the pressure handle [2].



cloth dampened in water. Once the parts are clean and dry, replace them carefully, making sure the

17 Maintenance Operations

CUNILL squeezers do not require any special maintenance operations other than regular basic cleaning and external care.

However, it is **IMPORTANT** to observe the following guidelines:

a) Periodically check the power cord plug, On/Off switch [8] and the various parts of the squeezer. If you observe any deterioration of any of the components or abnormal operation of the squeezer, **DO NOT SWITCH THE MACHINE ON**. Keep it disconnected from the mains and immediately contact **CUNILL** technical service.

NEVER ATTEMPT TO REPAIR THE SQUEEZER YOURSELF.

b) Possible repairs must be performed by **CUNILL** technical service personnel or by authorized dealer personnel.

c) Do not make any changes or modifications to the squeezer.

d) Repairs must be performed using **ORIGINAL SPARE PARTS** supplied by the manufacturer (to speed up the process, there is a "First-Aid Kit" for urgent repair work or for quick replacement of parts subject to greatest wear).

e) All maintenance work must be performed with the squeezer switched off and disconnected from the mains.



18 Troubleshooting the Squeezer fails to turn on

Consult the manufacturer's technical service if the problem persists after having made the following checks:

a) Make sure that there has not been a power outage in the mains.

b) Make sure that the electrical data on the nameplate of the squeezer (see section 23 of this manual) matches the mains voltage.

c) **TURN OFF THE SQUEEZER**, disconnect it from the mains and check the condition of the power cord, plug and On/Off switch [8].

Shutdown for Storage or Disposal

If the squeezer will not be used for an extended period of time, disconnect it from the mains.

If you decide to de-commission the squeezer completely, **CHECK POSSIBLE RECYCLING OPTIONS WITH YOUR COUNTRY'S AUTHORITIES.**

Please be respectful of the environment and dispose of the squeezer properly.

Usage Precautions

CUNILL squeezers were designed exclusively to obtain juice from citrus fruits. For safety reasons, they should never be used for any other purpose.

The manufacturer cannot be held responsible for any injuries or harm to the health of persons or animals resulting from undue or improper use of the squeezers.



Although CUNILL squeezers are equipped with all the safety devices needed to ensure completely safe use, in order to prevent possible injury or harm, users must observe the following safety measures:

- a) Never handle the squeezer when barefoot, or with your hands or feet wet or damp.
- b) Avoid spraying water on the outside surfaces of the squeezer. If the external housing of the squeezer gets wet during operation, or even when Off, **immediately unplug it from the mains and dry it completely.**
- c) Avoid penetration of solids or liquids in the interior of the squeezer. If any solid object or liquid accidentally falls into the interior of the squeezer when in operation or when it is off, **disconnect it immediately from the mains and have it checked by CUNILL technical service personnel.**
- d) In general, never turn on the squeezer without all of its movable parts in their proper position.
- e) In general, squeezers should not be operated continuously for over thirty minutes (check the nameplate on the squeezer).
- f) Always follow all of the instructions in this manual for operating, cleaning and maintenance processes.
- g) To disconnect the cord from the mains, pull from the plug and never from the cord itself.
- h) As with any other machine, prevent the use of the squeezer by persons who have not fully read this manual or who are not prepared to use this machine appropriately (e.g. children).

A thermal protector prevents overheating of the electric motor coils by shutting off power when the temperature exceeds the permitted limit (due to faulty operation, such as continuous blockage of the rotor).

The nameplate is found attached to the squeezer and on the cover of this **USER'S MANUAL** (the information is the same on both).

The contents of the label are as follows:



