


07/2012

Mod: E22/CPA4-N

Production code: 393126



Diamond
catering equipment

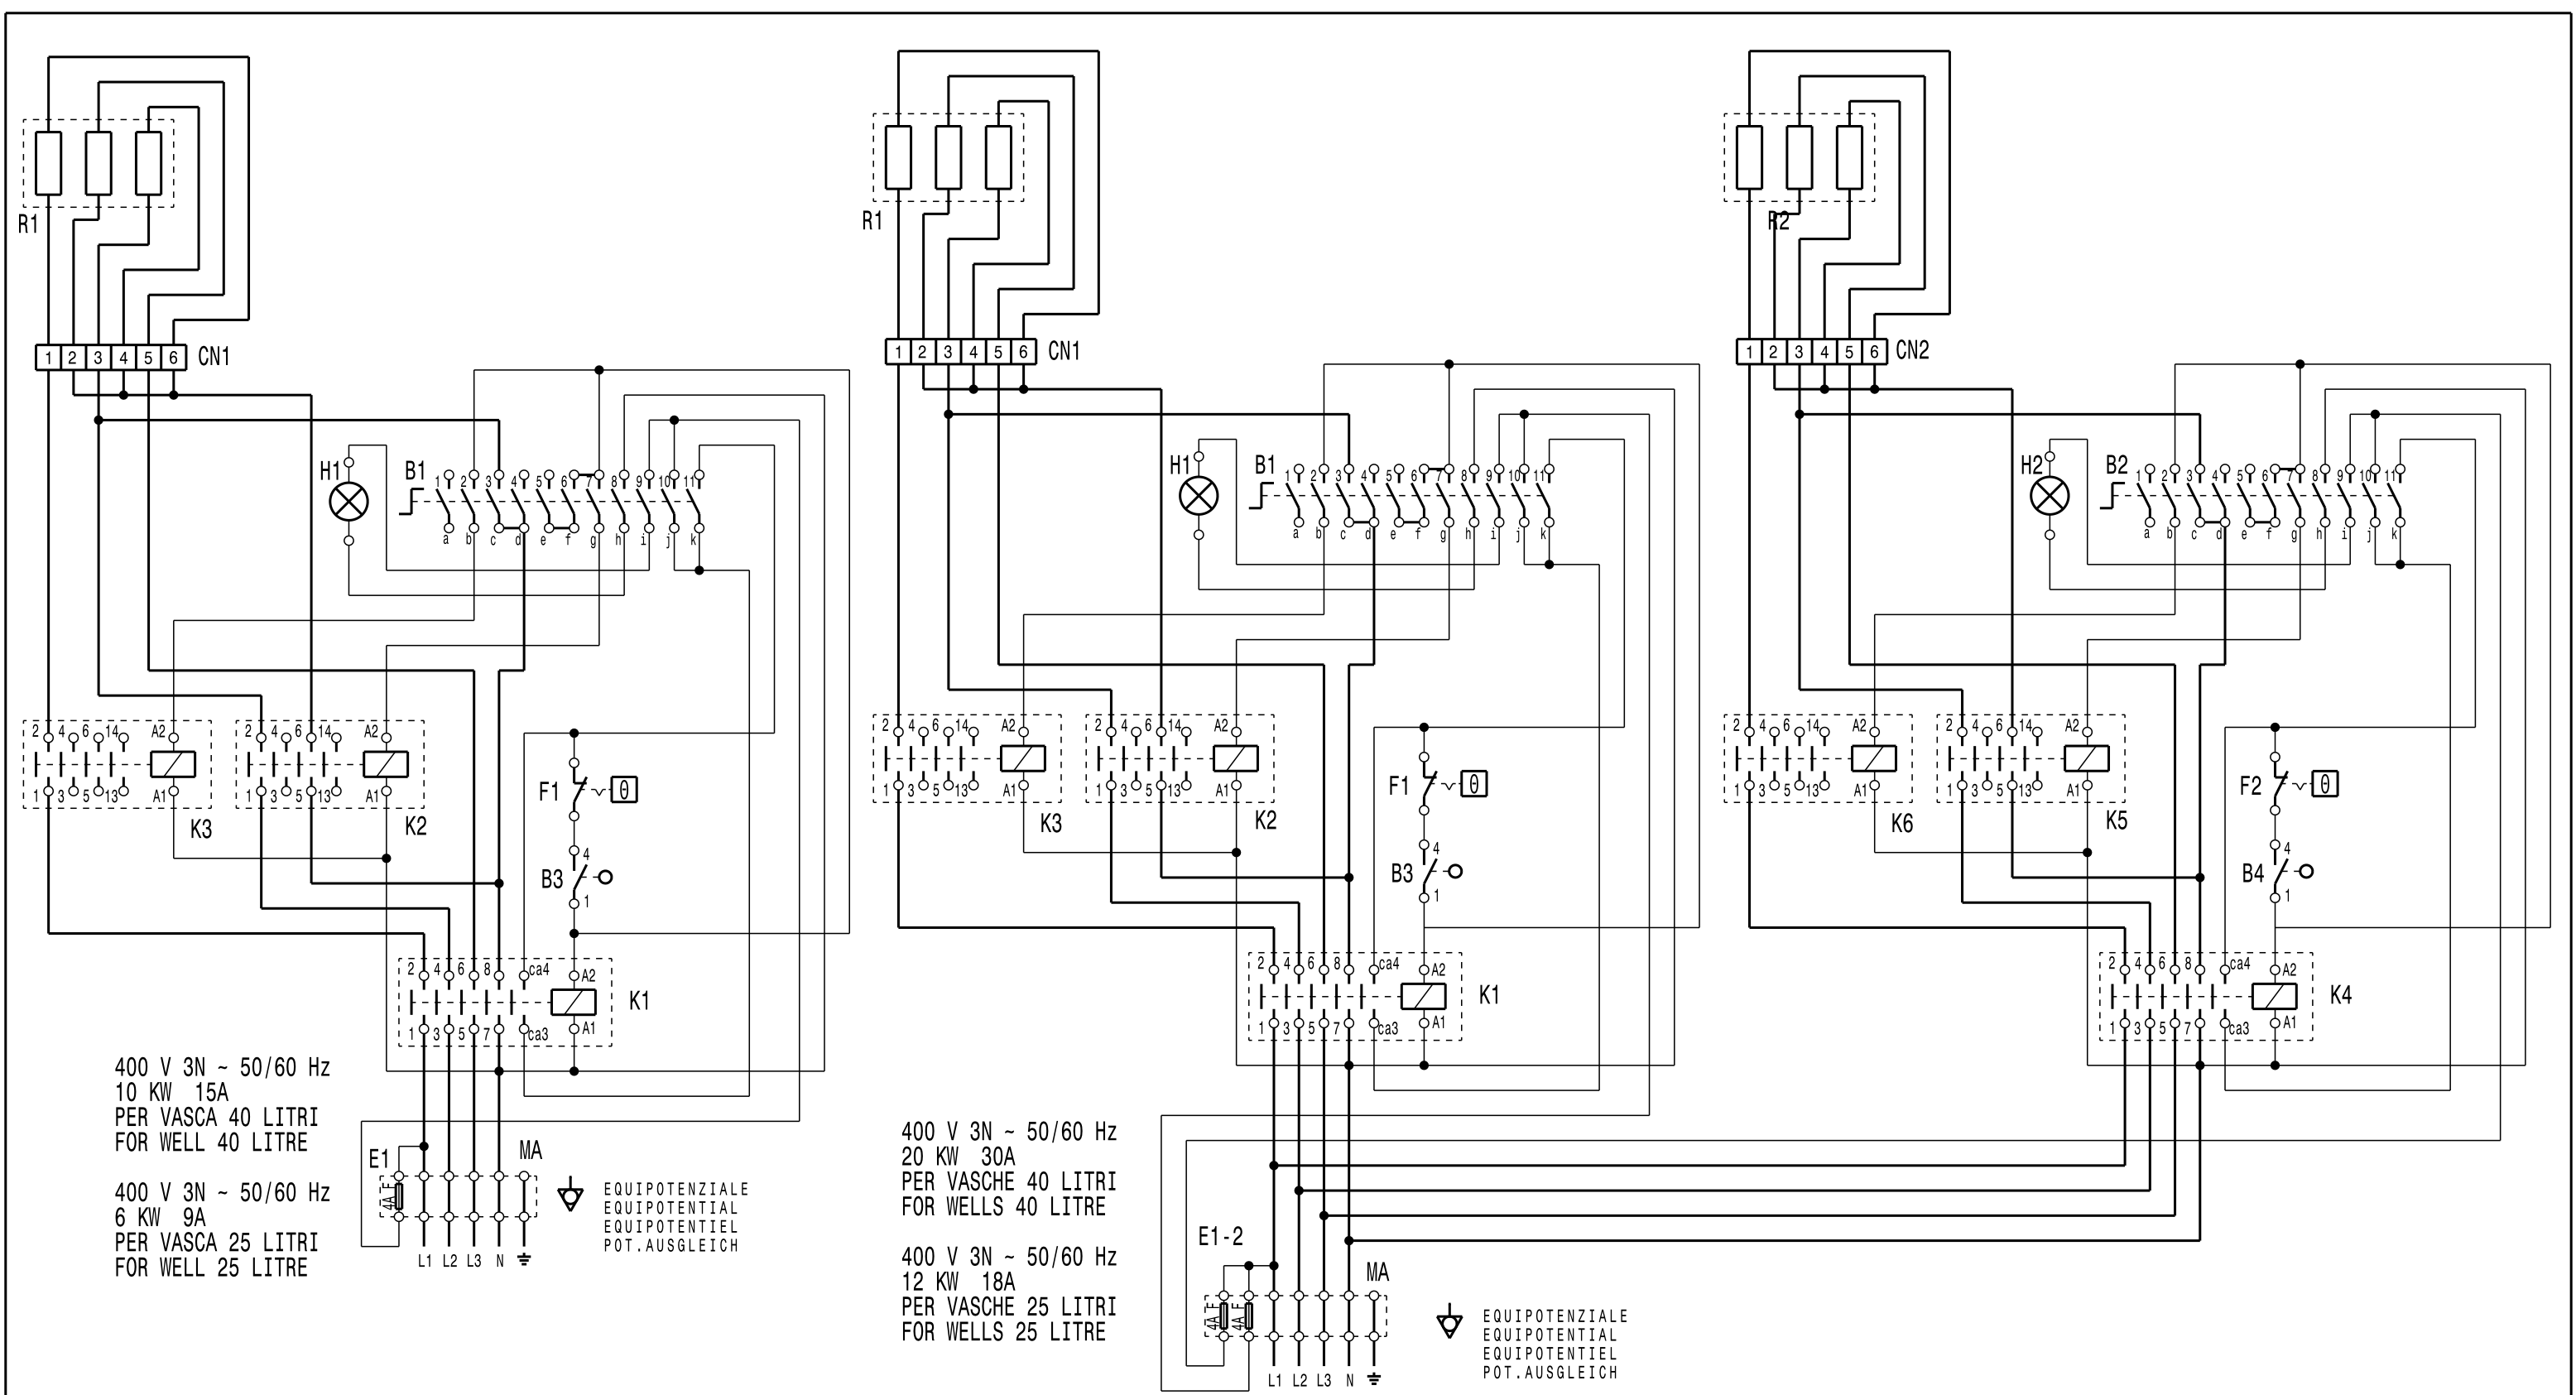

400 V 3N ~ 50/60 Hz
10 KW 15A
PER VASCA 40 LITRI
FOR WELL 40 LITRE

400 V 3N ~ 50/60 Hz
6 KW 9A
PER VASCA 25 LITRI
FOR WELL 25 LITRE

E1
L1 L2 L3 N

MA

EQUIPOTENZIALE
EQUIPOTENTIAL
EQUIPOTENTIEL
POT.AUSGLEICH

400 V 3N ~ 50/60 Hz
20 KW 30A
PER VASCHE 40 LITRI
FOR WELLS 40 LITRE

400 V 3N ~ 50/60 Hz
12 KW 18A
PER VASCHE 25 LITRI
FOR WELLS 25 LITRE

E1-2
L1 L2 L3 N

MA

EQUIPOTENZIALE
EQUIPOTENTIAL
EQUIPOTENTIEL
POT.AUSGLEICH

B1-2 PER VASCA 40 LITRI / FOR WELL 40 LITRE

POSITION	1	2	3	4	5	6	7	8	9	10	11	POWER (W) (40l)	POWER (W) (25l)
	a	b	c	d	e	f	g	h	i	j	k		
0												0	0
1	●		●			●		●	●			1666	1000
2	●	●		●		●		●	●			5000	3000
3				●	●		●	●	●			6660	4000
4	●	●		●	●		●	●	●			10000	6000

CN1-2	CONNETTORE	CONNECTOR
E1-2	FUSIBILE	FUSE
K1-6	CONTATTORE	CONTACTOR
R1-2	RESISTENZA	HEATING ELEMENT
H1-2	LAMPADA "CORRENTE INSERITA"	POWER ON LAMP
F1-2	LIMITATORE DI TEMPERATURA	TEMPERATURE LIMITING THERMOSTAT
B3-4	MICROINTERRUTTORE	MICROSWITCH
B1-2	COMMUTATORE	ROTARY SWITCH
MA	MORSETTIERA	TERMINAL BOARD