

08/2010

Mod: MIV-40


Production code: FM400VV+FM400L (ORGANGE)



Diamond
catering equipment

**SCHEDE ELETTRONICHE
ELECTRONIC CARDS
FICHAS ELECTRÓNICAS
FICHES ELECTRONIQUES
LEITERPLATTEN
ЭЛЕКТРОННЫЕ СХЕМЫ**

	250VF (1 N PE AC 230-240V 50-60Hz)
S1= pulsante di start M1-M2 = motore L-N = 2 AC 230V 50-60Hz S1= start button M1-M2 = motor L-N = 2 AC 230V 50-60Hz S1= interruptor de start M1-M2 = motor L-N = 2 AC 230V 50-60Hz S1= poussoir de start M1-M2 = moteur L-N = 2 AC 230V 50-60Hz S1= Start-Taste M1-M2 = Motor L-N = 2 AC 230V 50-60Hz S1= кнопка старт M1-M2 = мотор L-N = 2 AC 230V 50-60Hz	
	250VV (1 N PE AC 230-240V 50-60Hz)
S1= pulsante di start M1-M2 = motore L-N = 2 AC 230V 50-60Hz S1= start button M1-M2 = motor L-N = 2 AC 230V 50-60Hz S1= interruptor de start M1-M2 = motor L-N = 2 AC 230V 50-60Hz S1= poussoir de start M1-M2 = moteur L-N = 2 AC 230V 50-60Hz S1= Start-Taste M1-M2 = Motor L-N = 2 AC 230V 50-60Hz S1= кнопка старт M1-M2 = мотор L-N = 2 AC 230V 50-60Hz	

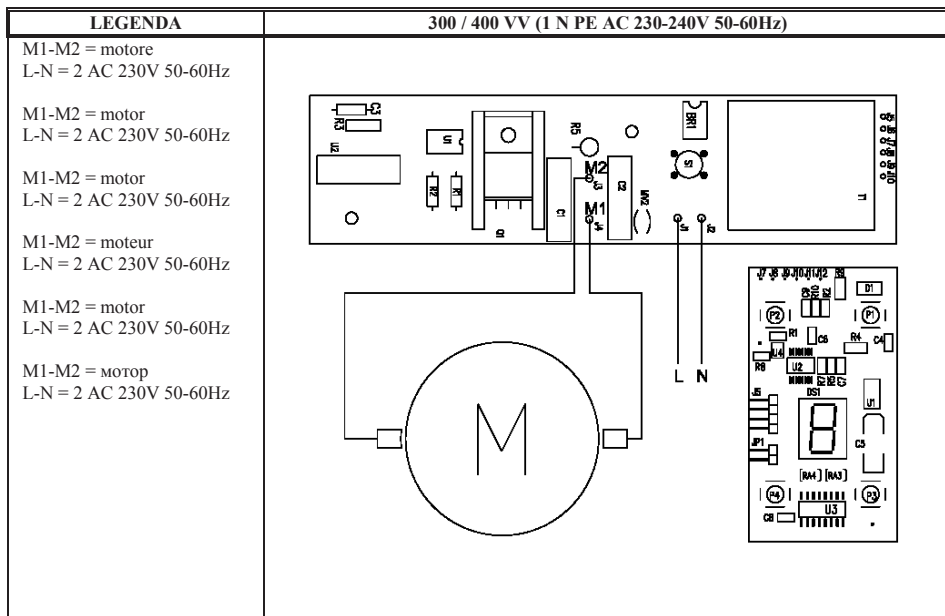

	350 / 450 / 650 VF (1 N PE AC 230-240V 50-60Hz)
S1= pulsante di start M1-M2 = motore L-N = 2 AC 230V 50-60Hz S1= start button M1-M2 = motor L-N = 2 AC 230V 50-60Hz S1= interruptor de start M1-M2 = motor L-N = 2 AC 230V 50-60Hz S1= poussoir de start M1-M2 = moteur L-N = 2 AC 230V 50-60Hz S1= Start-Taste M1-M2 = Motor L-N = 2 AC 230V 50-60Hz S1= кнопка старт M1-M2 = мотор L-N = 2 AC 230V 50-60Hz	

	350 / 450 / 650 VV (1 N PE AC 230-240V 50-60Hz)
S1= pulsante di start M1-M2 = motore L-N = 2 AC 230V 50-60Hz S1= start button M1-M2 = motor L-N = 2 AC 230V 50-60Hz S1= interruptor de start M1-M2 = motor L-N = 2 AC 230V 50-60Hz S1= poussoir de start M1-M2 = moteur L-N = 2 AC 230V 50-60Hz S1= Start-Taste M1-M2 = Motor L-N = 2 AC 230V 50-60Hz S1= кнопка старт M1-M2 = мотор L-N = 2 AC 230V 50-60Hz	