

08/2015

Mod: TS22

Production code: FTS117



Diamond
catering equipment

SCHEDE ELETTRONICHE
ELECTRONIC CARDS
FICHAS ELECTRONICAS
FICHES ELECTRONIQUES
LEITERPLATTEN
ЭЛЕКТРОННЫЕ СХЕМЫ

T.. 12 / T.. 22 (1N PE AC 230V 50Hz)

PE = conduttore di terra
PDC = protezione termica
W1 = ponte
S2 = pulsante di stop
S1 = pulsante di start
F = fusibile 500mA
C = condensatore
2-3 = motore
1-4 = 2 AC 230V 50Hz
L1-N1 = motore
L-N = 2 AC 230V 50Hz

PE = ground conductor
PDC = thermal protection
W1 = bridge
S2 = stop button
S1 = start button
F = fuse 500mA
C = condenser
2-3 = motor
1-4 = 2 AC 230V 50Hz
L1-N1 = motor
L-N = 2 AC 230V 50Hz


PE = conductor de tierra
PDC = protección térmica
SQ1 = micro interruptor
S2 = botón de stop
S1 = botón de start
F = fusible 500mA
C = condensador
2-3 = motor
1-4 = 2 AC 230V 50Hz
L1-N1 = motor
L-N = 2 AC 230V 50Hz

PE = conducteur de terre
PDC = protection thermique
W1 = pont
S2 = poussoir de stop
S1 = poussoir de start
F = fusible 500mA
C = condensateur
2-3 = moteur
1-4 = 2 AC 230V 50Hz
L1-N1 = moteur
L-N = 2 AC 230V 50Hz


PE = erdungsleiter
PDC = thermoschutzschalter
W1 = brücke
S2 = stopp-taste
S1 = start-taste
F = sicherung 500mA
C = kondensator
2-3 = motor
1-4 = 2 AC 230V 50Hz
L1-N1 = motor
L-N = 2 AC 230V 50Hz

PE = заземляющий провод
PDC = термическая защита
W1 = мост
S2 = кнопка стоп
S1 = кнопка старт
F = предохранитель 500m
C = конденсатор
2-3 = мотор
1-4 = 2 AC 230V 50Hz
L1-N1 = мотор
L-N = 2 AC 230V 50H

AZP – TGFM02

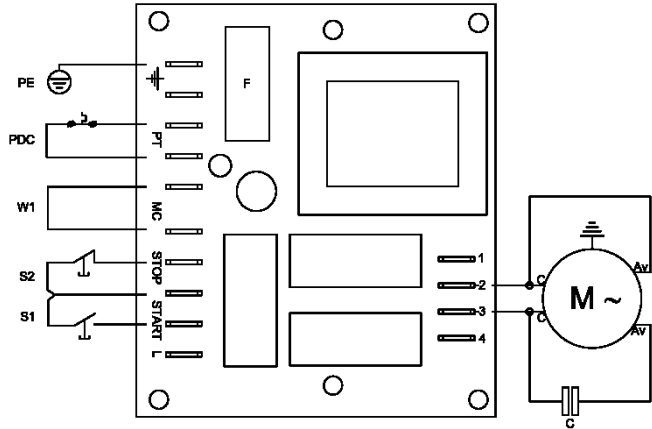

PTM02

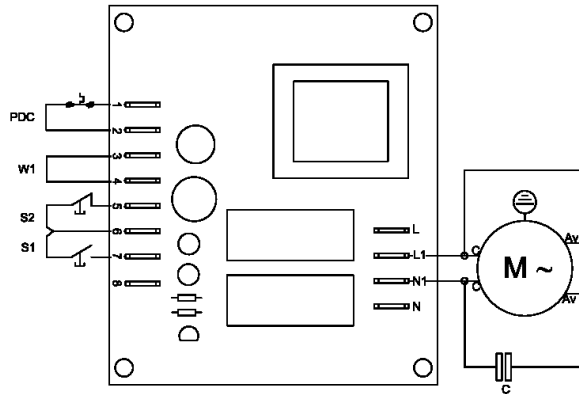

SR978 – SR1078 – TGM8

U – V- W = motore
 PE = conduttore di terra
 S1= pulsante di start
 S2= pulsante di stop
 W1 = ponte
 PDC = protezione termica
 F = fusibile 500mA
 A = 3 AC 400V 50Hz
 1-3 = alimentazione 400V
 1-2 = alimentazione 230V
 B = alimentazione 400V
 C = alimentazione 230V


U – V- W = motor
 PE = ground conductor
 S1= start button
 S2= stop button
 W1 = bridge
 PDC = thermal protection
 F = fuse 500mA
 A = 3 AC 400V 50Hz
 1-3 = feeding 400V
 1-2 = feeding 230V
 B = feeding 400V
 C = feeding 230V

U – V- W = motor
 PE = conductor de tierra
 S1= botón de start
 S2= botón de stop
 SQ1 = micro interruptor
 PDC = protección térmica
 F = fusible 500mA
 A = 3 AC 400V 50Hz
 1 -3 = alimentación 400V
 1 -2 = alimentación 230V
 B = alimentación 400V
 C = alimentación 230V


U – V- W = moteur
 PE = conducteur de terre
 S1= poussoir de start
 S2 = poussoir de stop
 W1 = pont
 PDC = protection thermique
 F = fusible 500mA
 A = 3 AC 400V 50Hz
 1-3 = alimentation 400V
 1-2 = alimentation 230V
 B = alimentation 400V
 C = alimentation 230V

U – V- W = motor
 PE = erdungsleiter
 S1= start-taste
 S2= stopp-taste
 W1 = brücke
 PDC = thermoschutzschalter
 F = sicherung 500mA
 A = 3 AC 400V 50Hz
 1-3 = speisung 400V
 1-2 = speisung 230V
 B = speisung 400V
 C = speisung 230V

U – V- W = мотор
 PE = заземляющий провод
 S1= кнопка старт
 S2 = кнопка стоп
 W1 = мост
 PDC = термическая защита
 F = предохранитель 500mA
 A = 3 AC 400V 50Hz
 1 -3 = питание 400V
 1 -2 = питание 230V
 B = питание 400V
 C = питание 230V

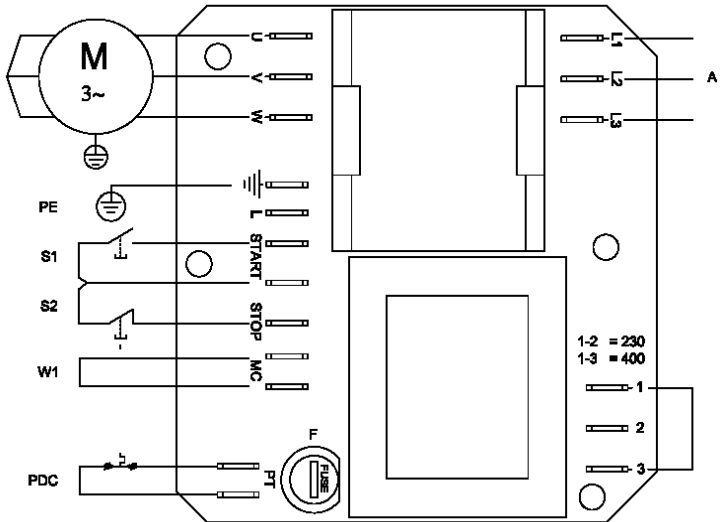

PTF04

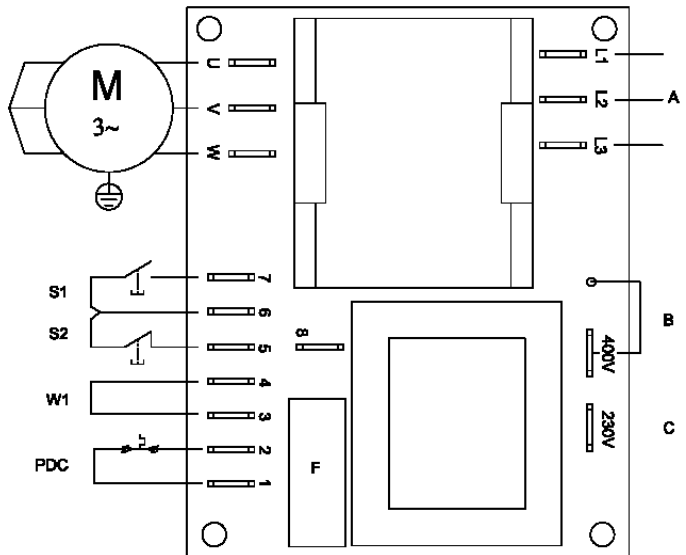

PE = conduttore di terra
 A = 2 AC 230V 50Hz
 PDC = protezione termica
 W1 = ponte
 S1= pulsante indietro
 S2= pulsante avanti
 S3 = pulsante stop
 C = condensatore

PE = ground conductor
 A = 2 AC 230V 50Hz
 PDC = thermal protection
 W1 = bridge
 S1= back button
 S2 = forward button
 S3 = stop button
 C = condenser


PE = conductor de tierra
 A = 2 AC 230V 50Hz
 PDC = protección térmica
 W1 = puente
 S1 = botón atrás
 S2 = botón adelante
 S3 = botón stop
 C = condensador

PE = conducteur de terre
 A = 2 AC 230V 50Hz
 PDC = protection thermique
 W1 = pont
 S1= poussoir en arrière
 S2 = poussoir en avant
 S3 = poussoir stop
 C = condensateur


PE = erdungsleiter
 A = 2 AC 230V 50Hz
 PDC = thermoschutzschalter
 W1 = brücke
 S1= taste zurück
 S2 = taste vor
 S3 = taste stopp
 C = kondensator

PE = заземляющий провод
 A = 2 AC 230V 50Hz
 PDC = термическая защита
 W1 = мост
 S1= кнопка назад
 S2 = кнопка вперед
 S3 = кнопка стоп
 C = конденсатор

TGM3 230V

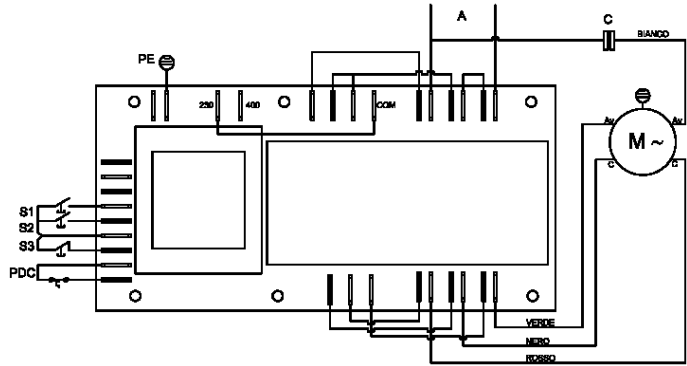

ITR-S-2 230V

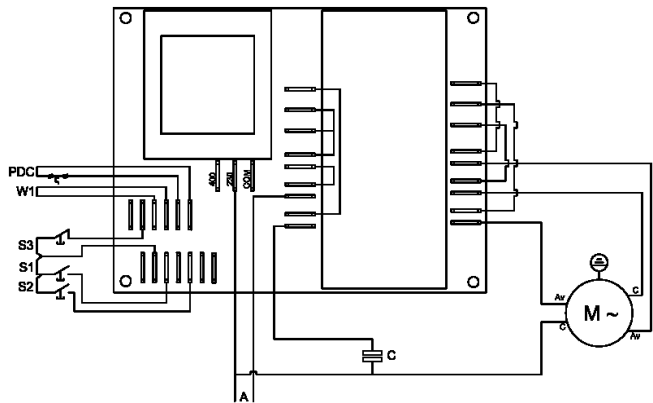

PE = conduttore di terra
A = 3 AC 400V 50Hz
PDC= protezione termica
W1 = ponte
S1= pulsante indietro
S2 = pulsante avanti
S3 = pulsante stop

PE = ground conductor
A = 3 AC 400V 50Hz
PDC= thermal protection
W1 = bridge
S1= back button
S2 = forward button
S3 = stop button


PE = conductor de tierra
A = 2 AC 230V 50Hz
PDC= protección térmica
W1 = puente
S1 = botón atrás
S2 = botón adelante
S3 = botón stop

PE = conducteur de terre
A = 3 AC 400V 50Hz
PDC= protection thermique
W1 = pont
S1= poussoir en arrière
S2 = poussoir en avant
S3 = poussoir stop

PE = erdungsleiter
A = 3 AC 400V 50Hz
PDC=thermoschutzschalter
W1 = brücke
S1= taste zurück
S2 = taste vor
S3 = taste stopp

PE = заземляющий провод
A = 3 AC 400V 50Hz
PDC= термическая защита
W1 = мост
S1= кнопка назад
S2 = кнопка вперед
S3 = кнопка стоп

TGM3 400V

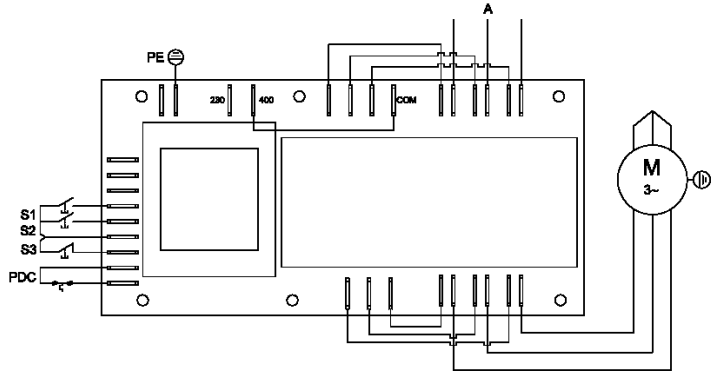

ITR-S-2 400V

