




MOD : E60/F20-6T-N

Production code : F60/60FRESE/2V10/T

03/2024


Mod.	kW	Volt	Ampere	Hz	Cable	NOTE
_60/30 FRE	7,5	380-415 V 3N	11,5	50-60	5G1,5 mm ²	
_60/30 FRE/P...	9	380-415 V 3N	14	50-60	5G2,5 mm ²	
_60/60 FRE 2M	7,5 + 7,5	380-415 V 3N	11,5 + 11,5	50-60	5G1,5 mm ² + 5G1,5 mm ²	
_60/60 FRE/P 2M	9 + 9	380-415 V 3N	14 + 14	50-60	5G2,5 mm ² + 5G2,5 mm ²	

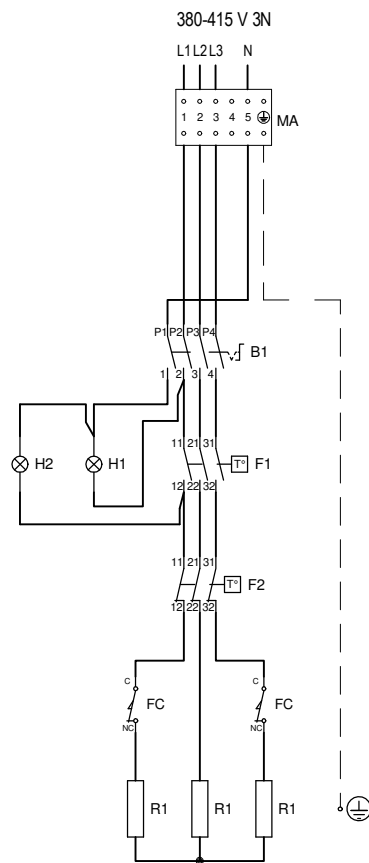

B1	INTERRUTTORE _ INTERRUPTEUR SWITCH _ SCHALTER _ INTERRUPTOR
F1	TERMOSTATO _ THERMOSTAT THERMOSTATO
F2	TERMOSTATO SICUREZZA _ THERMOSTAT DE SECURITE SAFETY THERMOSTAT _ TEMPERATURBEGRENZER _ TERMOSTATO DE SEGURIDAD
FC	MICROINTERRUTTORE _ MICROINTERRUPTEUR MICROSWITCH _ SICHERUNGSSCHALTER _ MICROINTERRUPTOR
H1	SPIA VERDE _ LAMPE TEMOIN VERTE GREEN LIGHT _ GRUENE KONTROLLAMPE _ INDICADOR LUMINOSO VERDE

H2	LAMPADA SPIA ARANCIO _ LAMPE TEMOIN ORANGE _ ORANGE INDICATOR LIGHT _ ORANGE KONTROLLLAMPE _ INDICADOR LUMINOSO NARANJA
MA	MORSETTIERA ARRIVO LINEA _ POWER INLET TERMINAL BOARD ANSCHLUSSBRETT _ BORNES ARRIVE LIGNE _ BLOQUE TERMINAL LÍNEA
R1	RESISTENZA _ HEATING ELEMENT HEIZKOEPRER _ RESISTANCE _ RESISTENCIA

Mod.	kW	Volt	Ampere	Hz	Cable	NOTE
60/60 FRE	15	380-415 V 3N	23	50-60	5G4 mm²	
60/60 FRE/P...	18	380-415 V 3N	27,5	50-60	5G4 mm²	

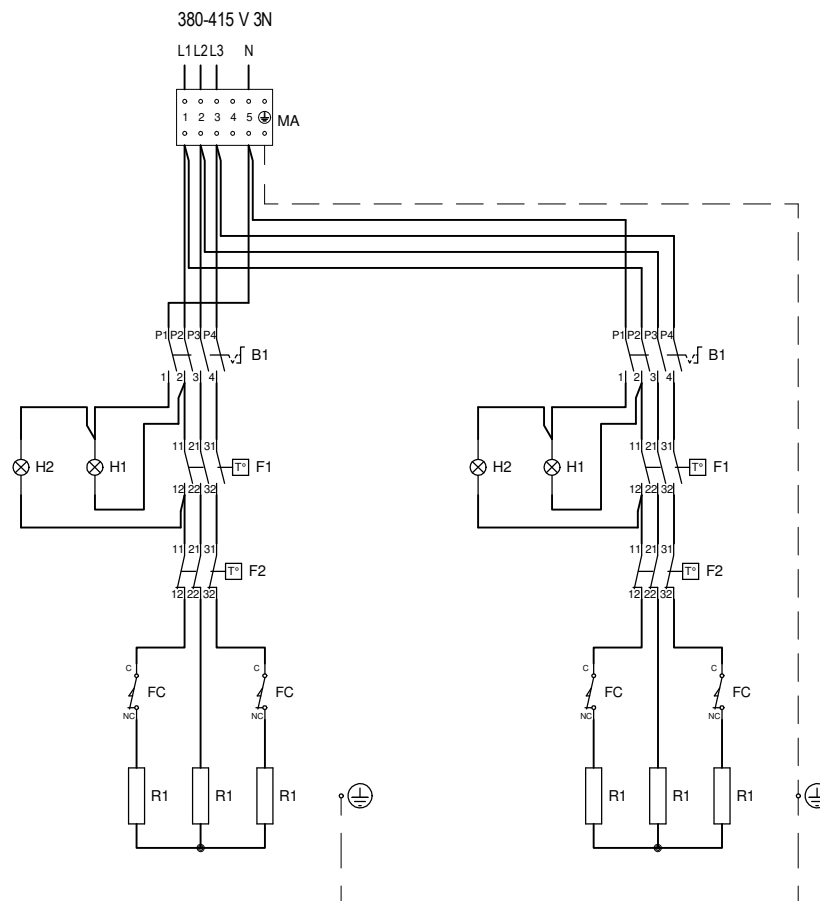

 PRIMA DI INTERVENIRE SULL' APPARECCHIATURA, SCOLLEGARE L' ALIMENTAZIONE ELETTRICA - UNPLUG THE POWER SUPPLY BEFORE OPERATING ON THE APPLIANCE - BEVOR AM GERÄT ARBEITEN AUSSCHALTEN SIE DIE ELEKTRISCHE SPEISUNG - AVANT D'INTERVENIR SUR L'APPAREIL, DÉCONNECTEZ L'ALIMENTATION ÉLECTRIQUE - DESCONECTAR EL ALIMENTACION ANTES CUALQUIER INTERVENCIÓN SOBRE EL APARATO				
DISEGNATO / DESIGNER LOT F.	CONTROLLATO / CONTROLLER LOT F.	DATA / DATE 06/05/2014	PAG. 1 / 1	CODICE / CODE  2511018.00
MODELLO TYPE FRIGGITRICE ELETTRICA _ FRITEUSE _ ELECTRIC FRYER _ ELEKTRO FRITEUSE _ FREIDORA ELÉCTRICA				