



MOD : E22/GPLP1-HP

Production code : 393346

11/2023



Modular Cooking Range Line ECO 90 Electric Grill Top HP 400mm

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



393346 (A9GREDGSOP)

Half module electric grill top -
HP

Short Form Specification

Item No.

Heating via incoloy armoured heating elements positioned under the cooking grid. Cooking surface grids are easily removable for cleaning. Heating elements can be tilted. Integrated water tap. Fixed well with drain. Extra strength work top in heavy duty 2 mm stainless steel. Right-angled side edges to allow flush-fitting junction between units. WRAS compliant. 380-400 V.

Main Features

- Incoloy armoured heating elements positioned under the cooking grid.
- Each bank of elements has an independent power regulation through a control knob.
- Fixed well with drain to collect residual cooking juices and grease.
- Large drain protected by overflow and filter.
- Water must be added to well before operation.
- Led warning indicator to give an alarm when well is empty.
- Water filling tap with knob control.
- Removable stainless steel deflectors to recuperate heat and reduce cooking time.
- Stainless steel splash guards on sides of cooking surface. Splash guards can be easily removed for cleaning.
- Top configuration allows installation on ambient base or refrigerated/freezer base.
- Removable 2mm thick steel U-shaped grids for fast heating of cooking surface.
- Suitable for countertop installation.

Construction

- Unit is 900mm deep to give a larger working surface area.

Included Accessories

- 1 of SCRAPER FOR HP ELECTRIC GRILL PNC 206436

Optional Accessories

- | | | |
|--|------------|--------------------------|
| • JUNCTION SEALING KIT | PNC 206086 | ☐ |
| • SUPPORT FOR "BRIDGE" SYSTEM 800 MM | PNC 206137 | ☐ |
| • SUPPORT FOR "BRIDGE" SYSTEM 1000 MM | PNC 206138 | ☐ |
| • SUPPORT FOR "BRIDGE" SYSTEM 1200 MM | PNC 206139 | ☐ |
| • SUPPORT FOR "BRIDGE" SYSTEM 1400 MM | PNC 206140 | ☐ |
| • SUPPORT FOR "BRIDGE" SYSTEM 1600 MM | PNC 206141 | ☐ |
| • SUPPORT FOR "BRIDGE" SYSTEM 400 MM | PNC 206154 | ☐ |
| • SIDE HANDRAIL-RIGHT/LEFT HAND-900 LINE | PNC 206165 | ☐ |
| • FRONTAL HANDRAIL 400 MM | PNC 206166 | ☐ |
| • FRONTAL HANDRAIL 800 MM | PNC 206167 | ☐ |
| • LARGE HANDRAIL(PORTIONING SHELF)400 MM | PNC 206185 | ☐ |
| • LARGE HANDRAIL(PORTIONING SHELF)800 MM | PNC 206186 | ☐ |
| • FRONTAL HANDRAIL 1200 MM | PNC 206191 | ☐ |
| • FRONTAL HANDRAIL 1600 MM | PNC 206192 | ☐ |
| • 2 SIDE COVERING PANELS H=250-D=900-Z/OEM | PNC 206321 | ☐ |
| • SCRAPER FOR HP ELECTRIC GRILL | PNC 206436 | ☐ |

APPROVAL: _____

Diamond

Modular Cooking Range Line
ECO 90 Electric Grill Top HP 400mm



Modular Cooking Range Line ECO 90 Electric Grill Top HP 400mm

- DRAIN EXTENTION FOR HP ELECTRIC GRILL

PNC 206437 



Modular Cooking Range Line
ECO 90 Electric Grill Top HP 400mm


The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2023.07.03




Modular Cooking Range Line ECO 90 Electric Grill Top HP 400mm

Top

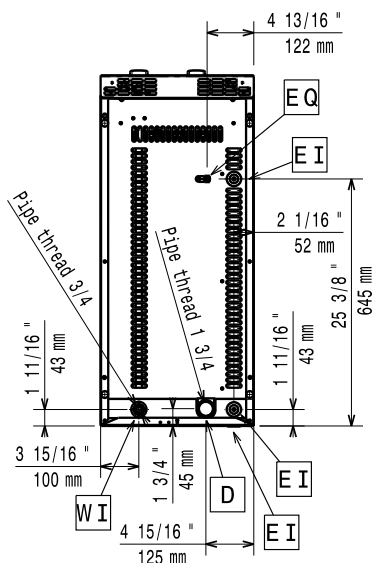


Side

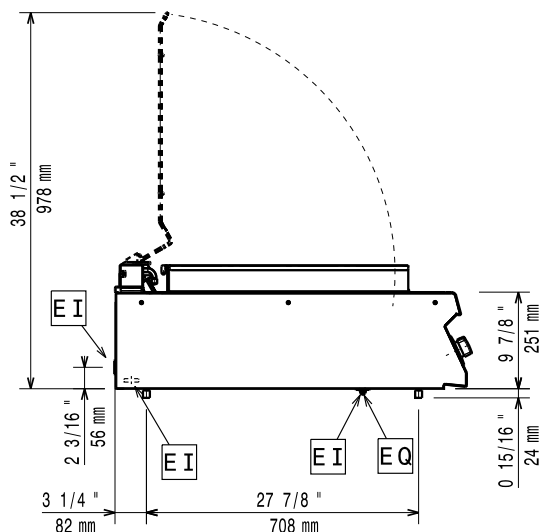

- D** = Drain
EI = Electrical inlet (power)
EQ = Equipotential screw
WI = Water inlet

Front



Electric

Supply voltage:

393346 (A9GREDSOP)

380-400 V/3N ph/50/60 Hz

Electrical power max.:

5.8 kW

Predisposed for:

380-400V 3N~ 50/60Hz

5.4-5.8kW

Key Information:

Cooking surface width:	345 mm
Cooking surface depth:	598 mm
External dimensions, Width:	400 mm
External dimensions, Depth:	900 mm
External dimensions, Height:	250 mm
Net weight:	52 kg
Shipping weight:	75 kg
Shipping height:	400 mm
Shipping width:	500 mm
Shipping depth:	1020 mm
Shipping volume:	0.2 m ³

If appliance is set up either next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Certification group:

HEG9E1