




10/2020

Mod: DXE8/6/B-D

Production code: IT3813BEDD

	Model	DXE8/6		
	Code Production	IT3813BEDD		
Interface				
				
	Overall Dimension (Width-Depth-Height) *open		mm	724x818x1529(2010*)
	Packaging Dimension (WxDxH)		mm	760x840x1520
	Gross weight		Kg	95
	Net weight		Kg	85
	Volume		mc	0,98
	Rack size		mm	500x500
	Max door /hood opening		mm	450
	Max glasses/plate Height		mm	440/450
	General construction			single skin
	Door/hood Construction			single skin
	Tank construction			deep drawn
	Tank volume		liter	15
	Tank heating element		W	2.100
	Tank surface strainers			yes-composite
	Wash pump type			double flow
	Wash pump power		W	500
	Wash temperature		°C	55
	Boiler type			without pressure
	Boiler volume		liter	6
	Back-flow system			break tank
	Boiler heating element		W	6.000
	Rinse booster pump			YES
	Rinse booster pump power		W	200
	Rinse temperature		°C	80
	Rinse water consumption		Liter /rack	2,6
	Optimal external water pressure		bar	1-4
	Drain system			deep drain
	Drain pump			standard built in
	Rinse aid dispenser			YES
	Detergent dispenser			YES
	Wash cycle		sec	120 - 180 - continuous
	 Sanitation washing cycle			YES
	Electric Power		W	6.500
	Electric Connection		V - ph - Hz	400V 3N 50Hz
	Fuse		A	16
	Water softner			NO
	Plates racks			YES
	Flat Rack			YES
	Cutterly Rack			YES
	Electric cable			YES
	Drain hose			YES
	Fill hose			YES

A		Ø 35 mm M	A	EXIT	Ø 25 mm M
B		G 3/4" M	B	EXIT	G 3/4" F
C		Power supply			

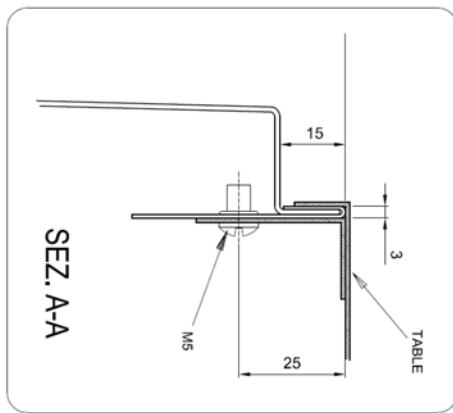
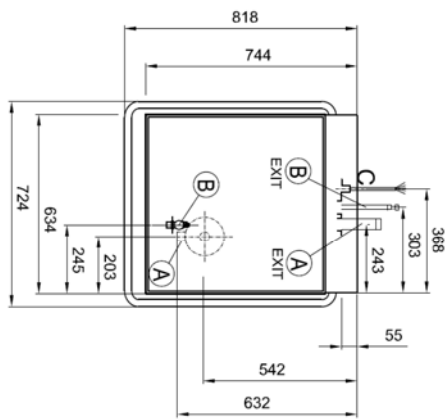


* LUCE UTILE PER CESTELLO
USEFUL SPACE FOR BASKET
LUMIERE UTILE POUR PANIER
NUTZBARER OFFENING FÜR KORBE
ABERTURA UTIL PARA CESTO

Installation layout

Hood type with drain pump

NH50PS 00

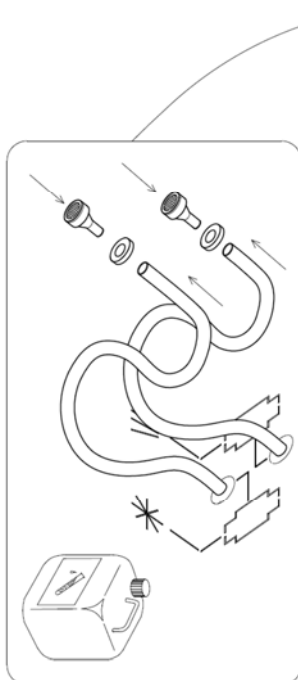

4 X