

12/2017

Mod: DLW30-TS/D

Production code: S30DDIELS8AIA



Diamond
catering equipment

High spin washing machine LM 30

C110508X

Technical data

Capacity	30	kg
Drum diameter	880	mm
Drum depth	523	mm
Drum volume	318	l
Load diameter	380	mm
Wash speed	32	rpm
Low speed	400	rpm
High spin speed	840	rpm
G Factor	346	
Noise	70	dB(A)
Heating leaks from the structure **	5	%

Weights and packing dimension

Height	1800	mm
Width	1350	mm
Depth	1350	mm
Volum	3,3	m ³
Gross weight	970	kg
Net weight	940	kg

Water consumpt

Total consumption	511	litri
Low level	120	litri
High level	127	litri

Electrical heating

Heating element	6x4000	W
Consumption*	12	kWh

Steam heating

Steam consumption*	20	kg
Max pressure***	4,5	bar

* Cycle B - ISO 9398





** Percentage on installed power

*** Optional 10 bar

Power and absorptions

Heating	Supply	Total power	Absorption
Elettrico	3ph 400V+N	30 kW	46 A
Elettrico	3ph 230V	30 kW	79 A
Elettrico	1ph 230V	NO kW	NO A
Vapore/Hot Water	3ph 400V+N	6 kW	11 A
Vapore/Hot Water	3ph 230V	6 kW	19 A
Vapore/Hot Water	1ph 230V	NO kW	NO A

MACHINE FRONT

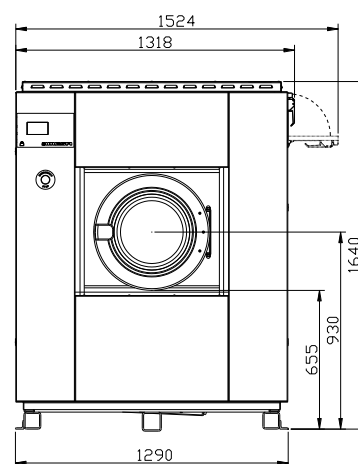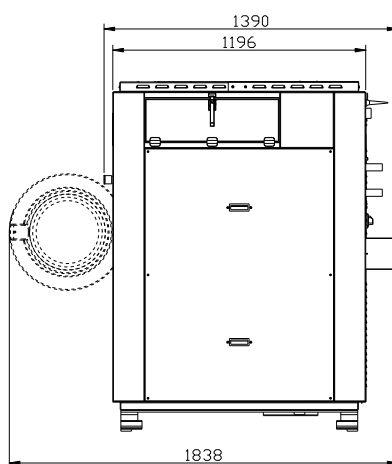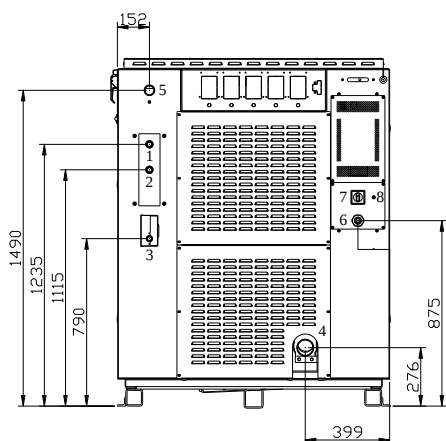

- 1 - Cold water inlet 1" - Press 0,5 ÷ 10 bar
- 2 - Hot water inlet 1" - Press 0,5 ÷ 10 bar
- 3 - Steam inlet 3/4"
- 4 - Drain Ø80 mm

- 5 - Bleed
- 6 - Electrical power
- 7 - Main switch
- 8 - Fuse



Your professional partner