





Modular Cooking Range Line ECO 70 Half Module Gas PowerGrill Top

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA #	



373042 (N7GRGDGC0P)

Gas grill top, half module - hp

Short Form Specification

Item No.

To be installed on open base installations, bridging supports or cantilever systems. High efficiency 7 kW stainless steel gas burners with flame failure device, optimized combustion and protected pilot light. Suitable for natural gas or LPG. Cooking surface grids in cast iron, easily removable for cleaning. Cast iron grids can be rotated for the grilling of fish or meats. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- Stainless steel burners with flame failure device, optimized combustion and protected pilot light.
- AISI 441 stainless steel deflective shields located below the radiants prevent burners from clogging, minimize flare ups and ensure even heat distribution (PATENT US9591947B2 and related family).
- Dishwasher-safe radiants removable without the use of tools to facilitate cleaning.
- Extractable full-depth grease collection drawer to accumulate excess grease and oil.
- Stainless steel high splash guards on the rear and sides of cooking surface. Splash guards can be easily removed for cleaning and are dishwasher-safe.
- Cooking grids made in highly resistant enameled cast iron for easy cleaning.
- Suitable for countertop installation.

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- IPx4 water protection.

Optional Accessories


Junction sealing kit	PNC 206086	Ш
 Support for bridge type installation, 800mm 	PNC 206137	
 Support for bridge type installation, 1000mm 	PNC 206138	
 Support for bridge type installation, 1200mm 	PNC 206139	
 Support for bridge type installation, 1400mm 	PNC 206140	
 Support for bridge type installation, 1600mm 	PNC 206141	
 Support for bridge type installation, 400mm 	PNC 206154	
Frontal handrail 400mm	PNC 206166	
Frontal handrail 800 mm	PNC 206167	
 Large handrail (portioning shelf) 400 mm 	PNC 206185	
 Large handrail (portioning shelf) 800 mm 	PNC 206186	
 Frontal handrail 1200 mm 	PNC 206191	
 Frontal handrail 1600 mm 	PNC 206192	
 Right and left side handrails 	PNC 206240	
 2 side covering panels, height 250 mm, depth 700 mm 	PNC 206320	
 Scraper kit with hooks for HP grills 	PNC 206347	
 KIT G.25.3 (NL) GAS NOZZLES FOR 700 AND 900 GAS GRILLS (STANDARD AND HP) 	PNC 206462	


APPROVAL:

Modular Cooking Range Line ECO 70 Half Module Gas PowerGrill Top




Modular Cooking Range Line ECO 70 Half Module Gas PowerGrill Top





EQ = Equipotential screwG = Gas connection

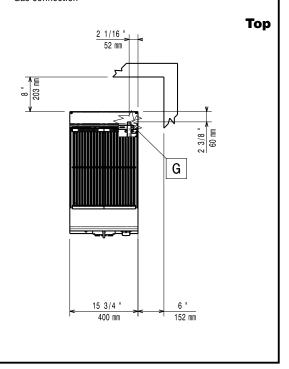

Gas

Gas Power:

373042 (N7GRGDGCOP) 7 kW

Standard gas delivery: Natural Gas G20 (20mbar)

Gas Type Option:

Gas Inlet: 1/2"

Key Information:

Cooking surface width: 371 mm Cooking surface depth: 472 mm Net weight: 32 kg Shipping weight: 42 kg Shipping height: 540 mm Shipping width: 460 mm Shipping depth: 820 mm Shipping volume: 0.2 m³

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Certification group: N7EGG



