


X=6-2y X+a=bf(x)=tanx

MOD: WR-VP99-2B

Production code : RCG1350B

GB Instruction Manual

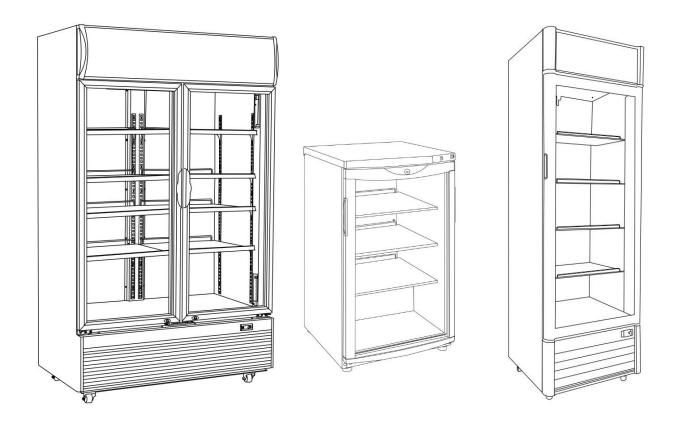

Dear Customer,

Congratulations on your purchase of this product.

Please take a few minutes before starting operation of the appliance and read the following operating instructions.

((

Table of Contents

Product Overview	3
Safety Tips	4
Intended Use	5
Location and Installation	6
Operation	7
Cleaning, Care & Maintenance	12
Troubleshooting	13
Disposal	14
Technical data	15
Warranty	15

Product Overview

Article Description

Showcase - Mechanical Controler

Showcase - Digital Controler

Safety Tips



IMPORTANT: For your safety read the manual carefully before installing or using this product. Save this manual for future reference.

Consult Local and National Standards to comply with the following:

- 1. Health and Safety at Work Legislation
- 2. Fire Precautions
- 3. IEE Wiring Regulations
- 4. Building Regulations
- 5. **DO NOT** use the appliance outside.
- 6. **DO NOT** attempt to service the item yourself.
- 7. **DO NOT** use damaged appliances. If you are in any doubt, consult service agent.
- 8. **DO NOT** use electrical appliances inside the appliance (e.g. heaters, ice-cream makers etc.), unless they are of the type recommended by the manufacturer.
- 9. Keep ventilation openings, in the appliance enclosure or in the built-in structure, clear of obstruction.
- 10.**DO NOT** use mechanical devices or other means to accelerate the defrosting process, other than those recommended by the manufacturer.
- 11.DO NOT damage the refrigerant circuit.
- 12.**DO NOT** stand or support yourself on the base, drawers or doors.
- 13.**DO NOT** allow oil or fat to come into contact with the plastic components or door seal. Clean immediately if contact occurs.
- 14. This unit can be used by children aged above 8 years and persons with reduced physical, sensory or mental capabilities or lacking of experience and knowledge who have been given supervision or using instruction of the device and understand the resulting risks (for European market).
- 15. Do not let children play with the appliance.
- 16. Cleaning and user maintenance must not be carried out by children without supervision.
- 17.**DO NOT** place combustible, explosive or volatile articles, corrosive acids or alkalis or liquids in the appliance.

Safety Tips

- 18.**DO NOT** use this appliance to store medical supplies.
- 19.**DO NOT** use jet/pressure washers to clean the appliance.
- 20.**DO NOT** allow children to play with the packaging, and dispose plastic bags safely.
- 21. Bottles that contain a high percentage of alcohol must be sealed and placed vertically in the refrigerator.
- 22. Always carry, store and handle the appliance in a upright orientation and move by holding the base of the appliance.
- 23. Always switch off and disconnect the power supply to the unit before cleaning.
- 24. If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.
- 25. This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety (for market beyond European).
- 26. Children should be supervised to ensure that they do not play with the appliance.
- 27. For indoor use only. Not suitable for installation in an area where a water jet could be used. Shall not be cleaned by a water jet.
- 28. To guarantee safe operation, ensure that the appliance is set up and connected as described in the instruction manual.
- 29. Any repairs and work on the appliance should only be carried out by the customer service department/ qualified technician.
- 30. The key to the electrical cabinet should be kept out of the reach of children and users.
- 31.Do not store explosive substances such as aerosol cans with a flammable propellant in this appliance.

5

Intended Use

Only use this appliance for cooling and storage of beverage for commercial purposes.

Location and Installation

- Remove the appliance from the packaging. Make sure that all protective plastic film and coatings are
 thoroughly removed from all surfaces. To prevent injury or damage to the unit, we recommend that the
 appliance should be unpacked and set up by two people.
- The climatic class can be found on the rating plate. It specifies the ambient temperatures at which the appliance may be operated. The rating plate can be found inside the appliance.

Climate Class	Max. Ambient Temperature	Relative Humidity
3	25	60%
4	30	55%
5	40	40%

- Maintain a distance of 20 cm (7 inches) between the appliance and walls or other objects for ventilation. Increase this distance if the obstacle is a heat source.
- The appliance should be placed on a solid flat and stable floor to reduce noise and vibration. Level the appliance by adjusting the feet.
- Avoid locating the unit in direct sunlight or near heat sources such as ovens or radiators.
- Please make sure the appliance is properly ventilated.
- Check that the power supply and voltage used comply with the details on the rating plate. The plug must be accessible after installation.
- Correctly connect and disconnect the plug. When inserting ensure the plug is fully engaged. While unplugging hold the body of the plug. Never pull the supply cord directly.
- If the unit is to be shut down for long period, switch it off and disconnect the plug from socket outlet. Clean the appliance and leave the door open to prevent odour.
- Important! For your personal safety, this appliance must be properly grounded (earthed). This appliance is equipped with a cord having a grounding wire with a grounding plug. The plug must be inserted into an outlet that is properly grounded and installed. Consult a qualified electrician or service centre if you do not completely understand the grounding instructions. If doubt exits whether the appliance is properly grounded, have a qualified electrician check the circuit to make sure the outlet is properly grounded.
- If the cable does not reach the nearest socket, either rearrange your store layout or ask a qualified electrician to fix a new socket.
- If power is cut off, wait for at least 3 minutes before restarting the appliance to avoid damaging the compressor.
- Slide the shelf/drawer into place.

Note: If the unit has not been stored or moved in an upright position, let it stand upright for approximately 12 hours before operation.

Note: Before using the appliance for the first time, clean the shelves and interior with soapy water.

Turn on

- Close the door of the appliance.
- Ensure the power switch is set to [O] then connect to the power outlet.
- Switch on the Power [I]. The current temperature within the appliance is displayed.


7

• The ℜ on the control panel will flash to indicate a delay to compressor start. (Digital Thermostat)

Temperature Setting and Control (Mechanical Thermostat)

• The front panel of the thermostat display:



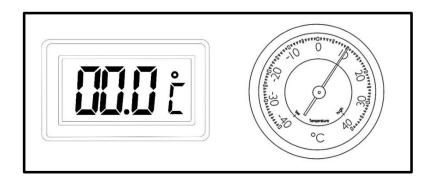

How to change the set point

- Turn the mechanical knob (1) to adjust the Temperature.
- Turn clockwise to lower the temperature
- Turn anti clockwise to increase the temperature

Manual Defrost

• Unplug the unit from the Powersupply




(SWITCH) LIGHT ON/OFF



(GREEN LIGHT) APPLIANCE OPERATING

Temperature Setting and Control (DIXELL)

• The front panel of the thermostat:

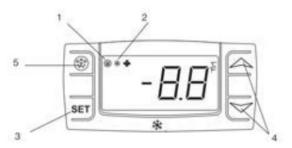

- 1. Defrost indicator
- 2. Compressor operation indicator
- 3. SET key
- 4. Temperature modification keys
- 5. Defrost button

How to see the set point

- Push and immediately release the **SET** key, the set point will be showed;
- Push and immediately release the **SET** key or wait about 15s to return to normal visualisation.

How to change the set point

- Push the **SET** key for more than 2 seconds to change the set point value;
- The value of the set point will be displayed and the "°C" starts blinking;
- To change the set value push the $\sqrt[n]{}$ " (up) or " $\sqrt{}$ " (down) arrows within 15s.
- To memorise the new set point value push the SET key again or wait 15s.

Automatic defrost

• The appliance will automatically run defrost cycles.

Note: The cycle starts from the time the appliance is initially powered up.

Manual Defrost:

- Press and hold the **DEFROST** button for 5 seconds.
- The defrost cycle will start immediately and the Defrost LED illuminates.


Note: Starting a manual defrost also resets the automatic defrost timer.

9

Temperature setting and control (EVCO)

The front panel of the thermostat

- 1. Compressor operation light
- 2. Defrosting light
- 3. Energy saving light
- 4. Stand-by light
- 5. Programming key (service agent only)
- 6. Machine On/Stand -by (keep pushed)
- 7. Manual defrost (keep pushed)

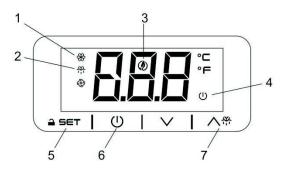

How to turn the machine in ON / STAND -BY status

- Press and hold the Wey for 4s, the machine will turn from ON to STAND -BY status and vice-versa.
- During the button hold the ${}^{\mbox{$ \circlearrowleft$}}$ LED will blink to show status changing.

How to unlock the keyboard (»Loc» message)

Push any button for more than 2s, «UnL» message will appear and the keyboard will be unlocked.

Note: For safety reasons the keyboard locks automatically after 30s of keys inactivity.

To execute any operation, please unlock the keyboard first.

How to see and modify the set point

- Push and immediately release the SET key, the set point will be showed and starts blinking;
- To change the set value push ∧ or ∨ arrows within 20s.
- To memorize the new set point value push the **SET** key again or wait 20s.

Automatic defrost

• The appliance will automatically run defrost cycles.

Note: The cycle starts from the time the appliance is initially powered up.

Manual Defrost:


- Press and hold the DEFROST ↑ button for 3s;
- The defrost cycle will start immediately and the Defrost [™] LED illuminates.

Note: Starting a manual defrost also resets the automatic defrost timer.

Temperature setting and control (CAREL)

The front panel of the thermostat

- 8. Machine On/Stand -by (keep pushed)
- 9. Programming key (service agent only)
- 10. Manual defrost (keep pushed)
- 11. Defrosting light
- 12. Compressor operation light

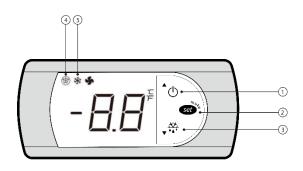

LED e funzioni associate

icona	funzione	normale funzionamento		start up		
		ON	OFF	blink		ice-versa.
0	compressore	acceso	spento	richiesto	ON	
æ	ventola	acceso	spento	richiesto	ON	
****	defrost	acceso	spento	richiesto	ON	nlocked.
AUX	aux	uscita accesa	uscita spenta	-	ON	
Ç	allarme	tutti	nessun allarme	-	ON	
(2)	orologio	RTC presente e abilitato, ed è stata	RTC assente o disabilitato, o non è stata	-	ON se RTC	
		impostata almeno 1 fascia oraria	impostata nemmeno 1 fascia oraria		presente	

Tab. 1 1g;

Tabella attivazione funzioni tramite i tasti - mod. S, X, Y, C

tasto	normale funzionamento		start up	
	pressione del singolo tasto	pressione conbinata		
<u>^</u>	più di 3 s: alterna stati ON/OFF	Premuti insieme atti- vano/disattivano ciclo	-	
$\triangle \frac{\varphi \nabla_{\varphi}}{A \lambda_{T}}$	più di 3 s: attiva/disattiva defrost	continuo	Premuti insie- me attivano	per 1 s visualizza cod. vers. firmware
set "	1 s.: visualizza/permette di impostare set point più di 3 s: accesso menù impostazione parametri (inserire password '22') Tacita allarme acustico (buzzer)	-	procedura RESET para- metri.	per 1 s RESET banco EZY corrente

Tab. 2

Tabella funzioni tasti - variante mod. M

tasto	normale funzionamento	start up	
₽	selezione rapida sonda visualizzata	Premuto insieme a "set" attiva procedura RESET parametri.	per 1 s visualizza cod. vers. firmware

Tab. 3

Cleaning, Care & Maintenance

Routine maintenance

Switch off and disconnect from the power supply before cleaning.

- Clean the enclosure and interior of the appliance as often as possible.
- Clean the unit with moist cloth. Never allow the switch, control panel, cable or plug to get wet.
- Do not use abrasive cleaning agents. These can leave harmful residues. Use only mild soapy water.
- Clean the door seal with water only.
- Ensure that no cleaning water penetrates into the electrical components.
- Must not be cleaned by a water jet.
- Always wipe dry after cleaning with soft cloth.
- Do not allow water used in cleaning to run through the drain hole into the evaporation pan.
- Take care when cleaning the rear of the appliance.
- An agent or technician must carry out repairs if required.
- If the appliance is to be left inactive for long periods, unplug the appliance after having turned the switch to OFF position, empty the refrigerating compartment and clean thoroughly.

Special maintenance

The instructions given in the following paragraph can be followed from qualified technicians

- Periodically clean the condenser using suitable tools (vacuum cleaner or soft brushes) can extend the life of the appliance.
- Check that the electrical connections are not loose.
- Check that the thermostat and the sensor are in proper working order.

Troubleshooting

Fault	Potential Failure	Problem solving action
The appliance is not	The unit is not switched on	Check the unit is plugged in correctly and
working		switched on
	Plug and/ or lead are damaged	Call your agent or qualified technician
	Fuse in the plug has blown	Replace the fuse (UK Plug)
	Power supply	Check power supply
The appliance turns	Too much ice on the evaporator	Defrost the appliance
on, but the	Condenser blocked with dust	Call your agent or qualified technician
temperature	Doors are not shut properly	Check doors are shut and seals are not
is too high/low		damaged
	Appliance is located near a heat	Move the refrigerator to a more suitable
	source or air flow to the condenser is	location
	being interrupted	
	Ambient temperature is too high	Increase ventilation or move appliance to
		a cooler position
	Unsuitable foodstuffs are being	Remove any excessive hot foodstuffs or
	stored in the appliance	blockages to the fan
	Appliance is overloaded	Reduce the amount of food stored in the
		appliance
The appliance is	Loose nut/ screw	Check and tighten all nuts and screws
unusually loud	The appliance has not been installed	Check installation position and change if
	in a level or stable position	necessary
The appliance is	The appliance is not properly leveled	Adjust the screw feet to level the
leaking water		appliance (if applicable)
	The discharge outlet is blocked	Clear the discharge outlet
	Movement of water to the drain is	Clear the floor of the appliance (if
	obstructed	applicable)
	The water container is damaged	Call your agent or qualified Technician
	The drip tray is overflowing	Empty the drip tray (if applicable)

Disposal

If the appliance is no longer of use and you wish to dispose of it, remove doors to prevent any small child from be trapped inside. Then please do in an environmentally correct way.

Contact a qualified service technician:

- 1. To recover all Freon/refrigerant
- 2. To remove the compressor or remove the oil from the compressor
- 3. To remove the flammable insulation blowing gases

Then the distributor/ retailer can contact their local metal recycling center to pick up the remaining cabinet, shelves, etc.

There may be special requirements or conditions. You can obtain information on the disposal of refrigeration appliances from:

- Your supplier
- Government authorities (The local council, Ministry of the Environment, etc.)

By law, disposal of hazardous wastes may be subject to fines and imprisonment under the provisions of the environmental regulations.

- 1. The refrigerant of this unit is a hydrocarbon refrigerant and is covered by the Kyoto Protocol.
- 2. Releasing the refrigerant to the atmosphere will harm the environment by contributing to the global warming. The Global Warming Potential (GWP) of R134a is 1430, of R404a is 3922, of R600a/R290 is 3.

Disposal



Discarded electric appliances are recyclable and should not be discarded in the domestic waste! Please actively support us in conserving resources and protecting the environment by returning this appliance to the collection centres (if available).



Dispose of packaging in accordance to applicable legal regulations.

Technical data

Model	Showcase
Climate Class	
Refrigerant Gas	
Refrigerant Charge	
Temperature Range (°C)	
Input Power	Please refer to the information indicated on the product. You will find
Rated Frequency	the information on the rating label on the back of the unit as well as
Rated Voltage	inside the cooling compartment. The circuit diagram is displayed on the back of the unit as well as inside the cooling compartment
Internal volume	back of the unit as well as hiside the cooling compartment
Net Weight	
Gross Weight	
Foaming Agent	
External Dimension (mm)	



CAUTION: RISK OF FIRE AND EXPLOSION WITH FLAMMABLE REFRIGERANT R600a/R290.



Warranty

A statutory warranty applies for this product.

Damages caused by wrong treatment or operation, by false placement or storage, improper connection or installation, as well as force or other external influences are not covered by this warranty. We recommend careful reading of the operating instructions as it contains important information.

Note:

- 1. In case this product does not function correctly, please firstly check if there are other reasons, e.g. for electrical appliances interruption of the power supply, or generally incorrect handling are the cause.
- **2.** Please note that, where possible, the following documents or rather information should be provided together with your faulty product:
 - Purchase receipt
 - Model description/ Type/ Brand
 - Describe the fault and problem as detailed as possible

In the case of a claim for guarantee or defects, please contact the seller.

GWL 8/14 EN