




MOD: FRU-1011/P



Production code : A1 RRUA-110E JR 12DI 252

07/2023

10.2 kW 25.6 A
230 V + 3 ~
50Hz



10.2 kW 14.7 A
400 V + 3 N ~
50Hz

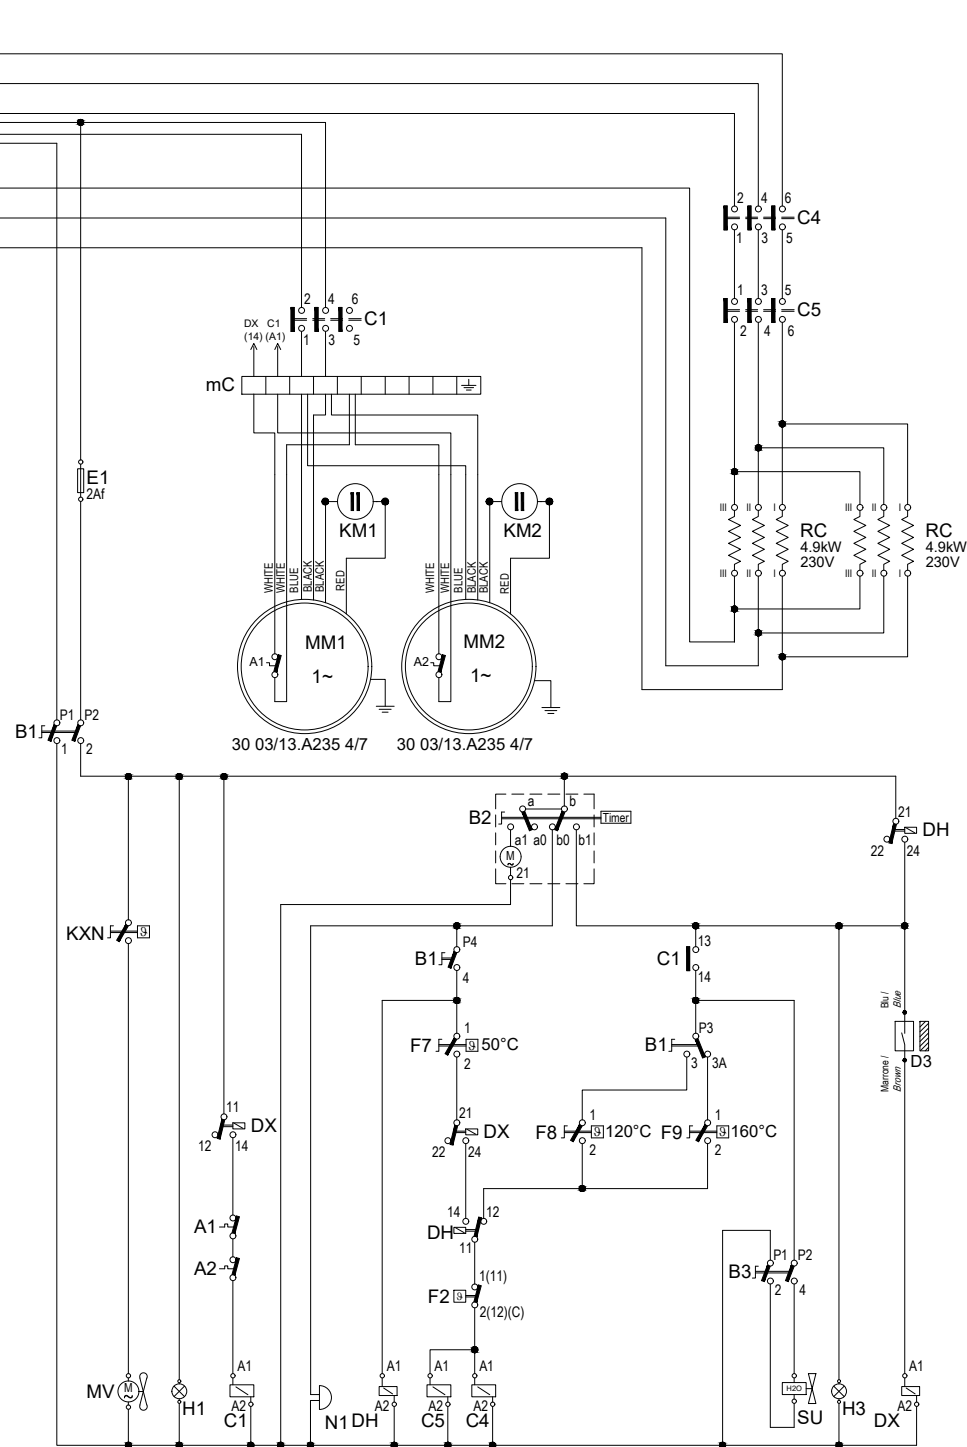

CS110-00 Comm-5-pos-Sr-CRUA									
3	Mantenimento								Maintenance
2	Rigenerazione 160°C								160°C Regeneration
1	Rigenerazione 140°C								140°C Regeneration
0	Speinto								Off
-1	Rigenerazione 140°C + Mantenim.								140°C Regeneration+Maintenance
-2	Rigenerazione 160°C + Mantenim.								160°C Regeneration+Maintenance
Pos	Descrizione								Description
P4	P3	P2	P1						
3	2	1							
Schema elettrico B1									
B1 Wiring diagram									
Contatto chiuso									
Closed contact									

RRUA-110E-02

SIG	ENGLISH DESCRIPTION	
A1	MOTOR THERMAL PROTECTION	
A2	MOTOR THERMAL PROTECTION	
B1	CYCLE OPERATING SELECTOR-SWITCH	
B2	TIMER	
B3	% STEAM ADJUSTER	
C1	HIGH SPEED MOTORFAN/S CONTACTOR	
C4	COOK.CHAMBER HEATING ELEMENTS CONTACTOR	
C5	COOK.CHAMBER HEATING ELEMENTS CONTACTOR	
D3	SENSOR FOR DOOR OPENING	
DH	HOLDING CYCLE RELAY	
DX	RELAY FOR DOOR SENSOR	
E1	CIRCUIT PROTECTION " FAST" FUSE	
F2	CHAMBER SAFETY THERMOSTAT	
F7	50°C HOLDING THERMOSTAT	
F8	120°C REGENERATION THERMOSTAT	
F9	120°C REGENERATION THERMOSTAT	
H1	OVEN PILOT LAMP ON	
H3	COOKING TIMER PILOT LAMP	
KM1.	SINGLE PHASE MOTORFAN CAPACITOR	
KM2	SINGLE PHASE MOTORFAN CAPACITOR	
KXN	CONTROL COMPARTMENT KLIXON TEMPERATURE CONTROL "ON 42 OFF 31°C"	
MM1	HIGH SPEED SINGLE-PHASE MOTOR	
MM2	HIGH SPEED SINGLE-PHASE MOTOR	
MV	CONTROL COMPARTMENT COOLING FAN	
N1	COOKING CYCLE END BUZZER	
RC(x)	CHAMBER HEATING ELEMENT/S	
SU	SOLENOID-VALVE FOR HUMIDIFICATION CYCLE	
ZZZ	-	